



LIGHTING



GENERAL INDEX

SAGITTER

- 6 Discharge moving heads
- 12 Led moving heads
- 18 Acl leds
- 23 Architectural leds
- 31 Stage leds
- 43 Led projectors
- 47 Cob projectors
- 50 Led battery projectors
- 54 Controllers
- 57 Ambient effects

SDJ

- 62 Led moving heads
- 69 Led beam effects
- 73 Led projectors
- 85 Stage leds
- 89 Led battery projectors
- 91 Led bars
- 96 Led pixel matrix
- 100 Led Kits
- 106 Controllers
- 112 Ambient effects

genuine Accessories

- 123 Pro fluids
- 124 Lamps
- 126 DMX cables
- 127 Cables
- 128 Cable cross
- 130 Clamps
- 131 Modula Series
- 138 Flight cases

GIVE LIGHTS

AND PEOPLE WILL FIND THE WAY

(Ella Barker)







**DISCHARGE
MOVING HEADS**



SG BLKARROW - PRODUCT CODE
SG CASEBLKARROW - CASE (2x SG BLKARROW)
SG BLKARROWKIT - KIT (2x SG BLKARROW + 1x SG CASEBLKARROW)
SG PLHRI280 - LAMP

LIGHT SOURCE

- Osram Sirius HRI 280W
- Color temperature 7800K
- Lamp lifespan: >2.000h in standard mode (280W) - 3.000h in eco mode (230W)
- Electronic ballast

OPTIC SYSTEM

- Beam angle Zoom Beam: 2° - 10°
- Beam angle Zoom Spot: 5° - 20°
- Electronic focus from 2m to infinite
- Luminous flux Beam mode: 75.000 lux @20mt
- Luminous flux Spot mode: 80.000 lux @5mt

COLOR SYSTEM

- Color wheel 13 colors + white

EFFECTS

- 9 dichroic rotating gobos, the gobos are interchangeable with the "plug & play" system
- Bi-directional rotation system and indexable gobos
- Shaking effect in both wheels
- Gobo scroll effect with adjustable speed in both wheels
- Fixed gobo wheel with 10 gobos and 4 steps "beam reduce"
- 1st Prism: 8-facet rotating circular prism, with bi-directional rotation and adjustable speed
- 2nd Prism: 6-facet rotating linear prism, with bi-directional rotation and adjustable speed
- Rainbow effect of the colors in both directions
- Independent frost
- High speed and precision Zoom
- Linear dimmer 0-100% high resolution
- High speed electronic strobe max.15 flash/s, with adjustable speed
- Random strobe effect and pulse dimmer effect with adjustable speed

CONTROL AND PROGRAMMING

- 4 different DMX channels configurations: 24/16/30/18 channels
- Protocol USITT DMX 512
- Pan&Tilt 8/16 bit selectable
- Built-in analyzer for easy fault finding

STRUCTURE AND CABINET


- Black metal housing and high resistance plastic materials
- Grafic blue display LCD
- PAN 540° / TILT 260° 8/16 bit selectable
- Mounting points: 2 pairs of ¼-turn locks
- Automatic repositioning of PAN and TILT after accidental movement not controlled by control unit
- Pan&Tilt lock system for transportation
- XLR 3/5 poles DMX in/out connection
- IP rating IP20
- Forced air cooling system with electronic control

POWER SUPPLY

- Input Voltage: AC~100-240V 50/60Hz
- Switching power supply unit
- Max power: 480W @ 230VAC
- Power input with powerCon connector
- Power supply cable 1,5 mt included

WEIGHT AND DIMENSIONS

- Net weight: 19 kg
- Dimensions: 380x284x608 mm

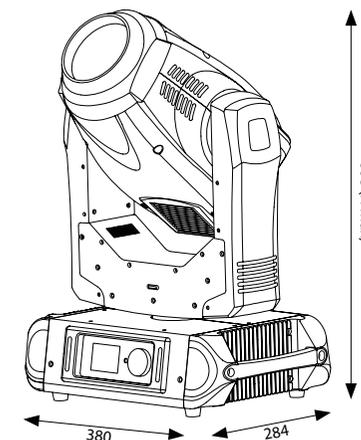



SG HD BEAM - PRODUCT CODE
SG CASEHD BEAM - CASE (2x SG HD BEAM)
SG HD BEAMKIT - KIT (2x SG HD BEAM + 1x SG CASEHD BEAM)
SG PLHRI230 - LAMP

LIGHT SOURCE

- Osram Sirius HRI 230W
- Color temperature 8000K
- Lamp lifespan: >3.000 hours
- Electronic ballast

OPTIC SYSTEM

- Beam angle: 3,8°
- Electronic focus from 2m to infinite
- Luminous flux 59.700 lux @20mt

COLOR SYSTEM

- Color wheel with 14 colors + white (CTO – CTB)

EFFECTS

- Fixed gobo wheel with 17 gobos and 3 steps “beam reduce”
- Gobo shacking effect
- Gobo scroll effect with adjustable speed in both direction
- 8-facets circular rotating prism with adjustable speed
- adjustable zoom prism effect
- Color rainbow effect in both directions
- Independent frost
- High resolution linear dimmer 0-100%
- High speed electronic strobe max.15 flashes/s, with adjustable speed
- Random strobe and pulse dimmer effects with adjustable speed

CONTROL AND PROGRAMMING

- 2 DMX configurations available: 16/20 channels
- Protocol USITT DMX 512
- Pan&Tilt 8/16 bit selectable
- Built-in analyser for easy fault finding

STRUCTURE AND CABINET


- Black metal housing and high resistance plastic materials
- Blue LCD graphic display
- PAN 540° e TILT 252°
- 3-phase Pan&Tilt motors
- Pan complete rotation time: 2.10 sec.
- Pan complete rotation time: TILT 1.20 sec.
- PAN resolution 2,11° (8 bit) –PAN 0,008° (16 bit)
- TILT resolution 0,98° (8 bit) –PAN 0,004° (16 bit)
- Mounting points: 2 pairs of ¼-turn locks
- Automatic repositioning of PAN and TILT after accidental movement
- Pan&Tilt lock system for transportation
- XLR 3/5 poles DMX in/out connection
- IP rating: IP20
- Forced air cooling system with electronic control

POWER SUPPLY

- Input Voltage: AC~100-240V 50/60Hz
- Switching power supply unit
- Max power: 350W @ 230VAC
- Power input with powerCON connector
- Power supply cable 1,5 mt included

WEIGHT AND DIMENSIONS

- Net weight: 17,4 kg
- Dimensions: 394x368x509 mm

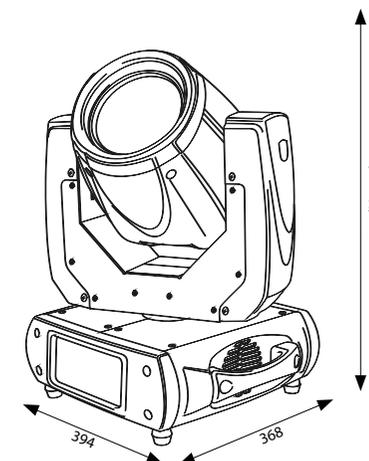



SG LTBEAM10R - PRODUCT CODE
SG CASELTBEAM - CASE (2x SG LITEBEAM10R)
SG LTBEAM10RKIT - KIT (2x SG LITEBEAM10R + 1x SG CASELTBEAM)
SG LTVIP280W - LAMP

LIGHT SOURCE

- Osram 10R - P-VIP 280W
- Lamp lifespan: 2000h
- Electronic ballast

OPTIC SYSTEM

- Beam Angle: 2,5°
- Electronic focus
- Luminous flux: 50.400 lux @ 20mt

COLOR SYSTEM

- Color wheel with 11 colors + white (CTO - CTB)

EFFECTS

- Fixed gobo wheel with 16 gobos and 2 steps "beam reducer"
- Gobo shacking effect
- Gobo scroll effect with adjustable speed
- 8-facet circular rotating prism with adjustable speed
- Color rainbow effect
- Frost filter
- Linear dimmer 0-100%
- Adjustable strobe effect
- Random strobe effect

CONTROL AND PROGRAMMING

- 2 DMX configurations available: 13/15 channels
- Protocol USITT DMX 512
- Built-in analyzer for easy fault finding

STRUCTURE AND CABINET


- Black metal housing and high resistance plastic materials
- Color LCD display
- Selectable Pan angle 360° / 540° / 630°
- Selectable tilt angle 90° / 180° / 270°
- Mounting points: 2 pairs of 1/4-turn locks
- Automatic repositioning of Pan and Tilt after accidental movements
- XLR 3-poles DMX IN/OUT connection
- IP rating: IP20
- Forced air cooling system with electronic control

POWER SUPPLY

- Input Voltage: AC~100-240V, 50/60 Hz
- Switching power supply unit
- Max power: 330W @ 230VAC
- Power input with PowerCON connector
- Power supply cable 1mt included

WEIGHT AND DIMENSIONS

- Net weight: 13 kg
- Dimensions: 298x203x434 mm

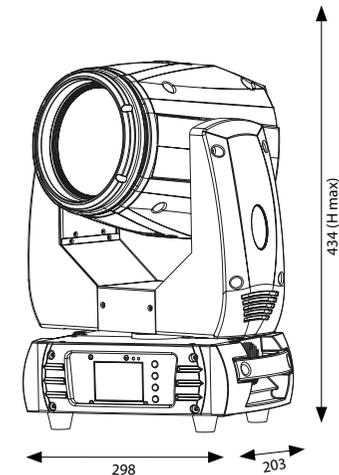



SG LTBEAM5R - PRODUCT CODE

SG CASELTBEAM - CASE (2x SG LITEBEAM5R)

SG LTBEAM5RKIT - KIT (2x SG LITEBEAM5R + 1x SG CASELTBEAM)

SG LTUHP190W - SG LTUHP200W - LAMP

LIGHT SOURCE

- Philips 5R - 189W
- Lamp lifespan: 2000h
- Electronic ballast

OPTIC SYSTEM

- Beam Angle: 2,5°
- Electronic focus
- Luminous flux: 39.120 lux @ 20mt

COLOR SYSTEM

- Color wheel with 11 colors + white (CTO - CTB)

EFFECTS

- Fixed gobo wheel with 16 gobos and 2 steps "beam reducer"
- Gobo shacking effect
- Gobo scroll effect with adjustable speed
- 8-facet circular rotating prism with adjustable speed
- Color rainbow effect
- Frost filter
- Linear dimmer 0-100%
- Adjustable strobe effect
- Random strobe effect

CONTROL AND PROGRAMMING

- 2 DMX configurations available: 13/15 channels
- Protocol USITT DMX 512
- Built-in analyzer for easy fault finding

STRUCTURE AND CABINET


- Black metal housing and high resistance plastic materials
- Color LCD display
- Selectable Pan angle 360° / 540° / 630°
- Selectable tilt angle 90° / 180° / 270°
- Mounting points: 2 pairs of 1/4-turn locks
- Automatic repositioning of Pan and Tilt after accidental movements
- XLR 3-poles DMX IN/OUT connection
- IP rating: IP20
- Forced air cooling system with electronic control

POWER SUPPLY

- Input Voltage: AC~100-240V, 50/60 Hz
- Switching power supply unit
- Max power: 230W @ 230VAC
- Power input with PowerCON connector
- Power supply cable 1mt included

WEIGHT AND DIMENSIONS

- Net weight: 13 kg
- Dimensions: 298x203x434 mm

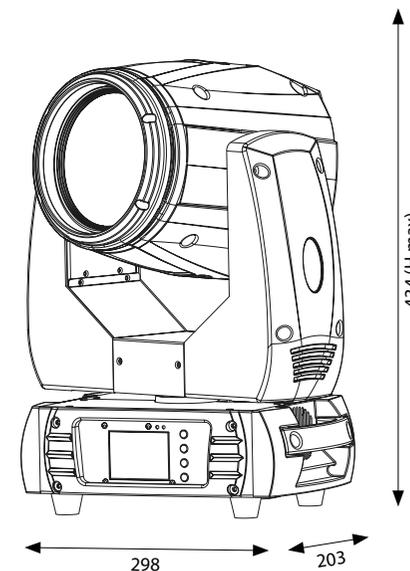

SG PIKEONE1R - PRODUCT CODE
SG CASEPIKEONE - CASE (2X SG PIKEONE1R)
SG PIKEONE1RKIT - KIT (2X SG PIKEONE1R + 1X SG CASEPIKEONE)
SG PIKEONE1RKIT4 - KIT (4X SG PIKEONE1R + 1X SG CASEPIKEONE4)
SG PLHRI100 - LAMP



LIGHT SOURCE

- Osram HRI 1R 100W Lamp
- Lamp lifespan: 6000h
- Electronic ballast

OPTIC SYSTEM

- Beam Angle: 3,2°
- Electronic focus
- Luminous flux: 4000 lux @ 10m

COLOR SYSTEM

- Color wheel with 12 colors + white (CTO - CTB)

EFFECTS

- Fixed gobo wheel with 13 gobos and 4 steps "beam reducer"
- Gobo shaking effect
- Gobo scroll effect with adjustable speed
- 16-facet circular rotating prism with adjustable speed
- Linear rotating prism with adjustable speed
- Color rainbow effect
- Frost filter
- Linear dimmer 0-100%
- Adjustable strobe effect
- Random strobe effect

CONTROL AND PROGRAMMING

- 2 DMX configurations available: 14/16 channels
- Protocol USITT DMX 512
- Built-in analyzer for easy fault finding

STRUCTURE AND CABINET


- Black metal housing and high resistance plastic materials
- Color LCD display
- Pan angle 540°
- Tilt angle 270°
- Mounting points: 2 pairs of 1/4-turn locks
- Automatic repositioning of Pan and Tilt after accidental movements
- XLR 3-poles DMX IN/OUT connection
- IP rating: IP20
- Forced air cooling system with electronic control

POWER SUPPLY

- Input Voltage: AC~100-240V, 50/60 Hz
- Switching power supply unit
- Max power: 160W @ 230VAC
- Power input with IN/OUT PowerCON connector
- Power supply cable 1mt included

WEIGHT AND DIMENSIONS

- Net weight: 7,8 kg
- Dimensions: 220x170x365 mm

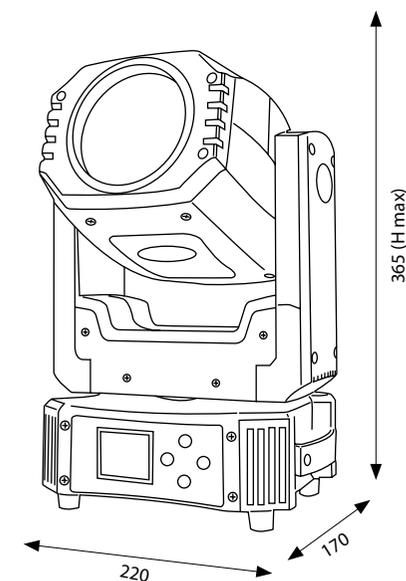

LED MOVING HEADS





SG GIUNO300 - PRODUCT CODE
SG CASEGIUNO300 - CASE (2x SG GIUNO)
SG GIUNO300KIT - KIT (2x SG GIUNO300 + 1x SG CASEGIUNO)
SG GIUNO300P - PRODUCT CODE (PROFILE VERSION)

LIGHT SOURCE

- 1x270W White led
- Color temperature: 7500K
- LED lifespan: >50.000h
- Led refresh frequency: >400Hz anti-flicker

OPTIC SYSTEM

- Beam angle: motorized zoom from 3° to 50°
- Electronic focus
- Luminous flux: 21000 LUX@5m (3° Min Zoom),
1400 LUX@5m (50°Max Zoom)

COLOR SYSTEM

- CMY color mixing + CTO
- Color wheel: 7 dichroics filters + white

EFFECTS

- Static gobo wheel: 5 static gobos + 1 animation effect
- Rotating gobo wheel: 7 rotating gobos, bidirectional rotation, indexable interchangeable with plug & play system - Gobo size 25mm / focus 19mm
- Gobo scroll effect with adjustable speed
- 3 facets rotating circular prism with adjustable speed
- 5 facets rotating linear prism with adjustable speed
- Color rainbow effect in both directions
- Iris
- Frost filter
- High precision and fast zoom
- Linear dimmer 0-100%, high resolution
- High speed electronic strobe with adjustable speed, max 25 flashes/s
- Random strobe and pulse effect with adjustable speed

CONTROL AND PROGRAMMING

- 2 different dmx configurations available: 23/28 channels
- Protocol USITT DMX512, Art-Net
- Wireless Solution dmx receiver board included
- Pan&Tilt 8/16 bit selectable resolution
- Master/Slave mode
- DMX recorder and scene editor from display
- Reset via dmx

STRUCTURE AND CABINET


- Black metal housing and plastic covers with high resistance
- LCD color graphic display
- Pan&tilt three-phases motors
- Pan 540° , Tilt 270°
- Automatic Pan&Tilt repositioning after accidental movement
- Pan&Tilt quick-lock system
- Mounting points: 1 pair of ¼ turn lock omega holders
- 3 poles XLR in/out dmx signal connections
- RJ45 ethercon in/out signal connection (Art-NET)
- Forced air cooling system with electronic control

POWER SUPPLY

- Input Voltage: AC~100-240V 50/60Hz
- Switching power supply unit
- Max power: 420W @ 230VAC
- Power in connection through Powercon connector
- Power supply cable included

WEIGHT AND DIMENSIONS

- Net weight: 29 kg
- Dimensions: 410x290x690 mm

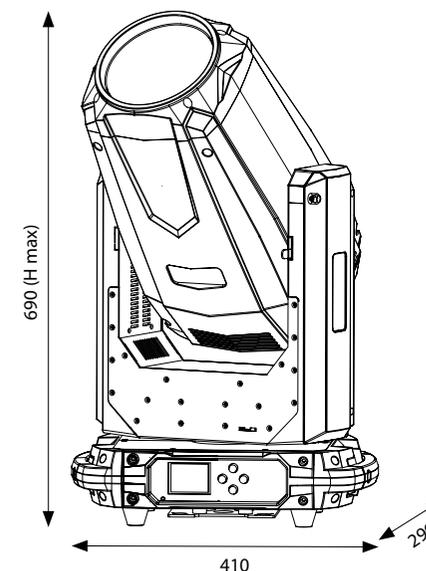



SG LTSPOTR10Z - PRODUCT CODE

SG CASELTPOT - CASE (2x SG LTSPOTR10Z)

SG LTSPOTR10ZKIT - KIT (2x SG LTSPOTR10Z + 1x SG LTSPOT)

LIGHT SOURCE

- 1x250W white led high brightness
- Color temperature: 7500K
- LED lifespan: > 50.000h
- LED refresh frequency: > 400Hz flicker-free

OPTIC SYSTEM

- Beam Angle: zoom from 10° to 25°
- Electronic focus
- Luminous flux: 8650 lux @ 5mt (11°)

COLOR SYSTEM

- Color wheel with 7 colors + white

EFFECTS

- 6 dichroic rotating gobos, the gobos are interchangeable with the "plug & play" system. Gobo size 23mm / focus 16mm
- Bidirectional rotating and indexable gobos
- Gobo shacking effect
- Gobo scroll effect with adjustable speed
- Gobo wheel: 8 metal static gobos + white
- 3-facets circular rotating prism with adjustable speed
- Color rainbow effect
- High speed and precision Zoom
- Linear dimmer 0-100%
- High speed electronic strobe max.25 flashes/s, with adjustable speed
- Random strobe and pulse dimmer effects with adjustable speed

CONTROL AND PROGRAMMING

- 3 DMX configurations available: 14/16/18 channels
- Protocol USITT DMX 512
- Pan&Tilt 8/16 bit selectable
- Master/Slave mode
- Reset via DMX

STRUCTURE AND CABINET


- Black metal housing and high resistance plastic ABS materials
- Color LCD display
- Selectable Pan angle 360° / 540° / 630°
- Selectable tilt angle 90° / 180° / 270°
- Mounting points: 1 pairs of 1/4-turn locks omega older
- Automatic repositioning of Pan and Tilt
- XLR 3-poles DMX IN/OUT connection
- IP rating: IP20
- Forced air cooling system with electronic control

POWER SUPPLY

- Input Voltage: AC~100-240V, 50/60 Hz
- Switching power supply unit
- Max power: 290W @ 230VAC
- Power input with PowerCON connector
- Power supply cable 1,0 mt included

WEIGHT AND DIMENSIONS

- Net weight: 14,2 kg
- Dimensions: 360x205x510 mm

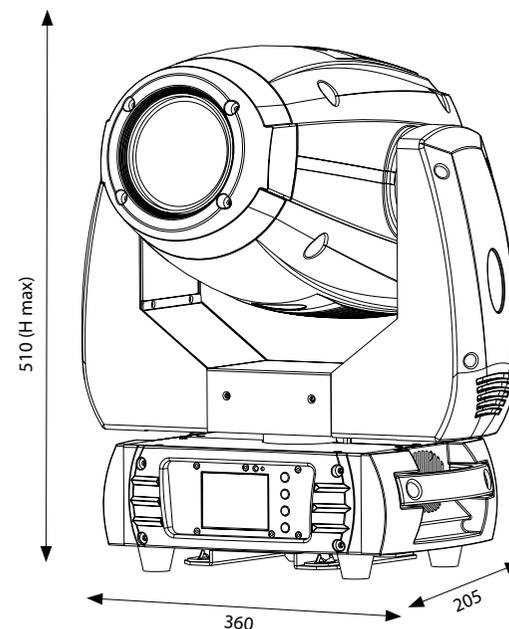



SG LTSPOTR5 - PRODUCT CODE
SG CASELTPOT - CASE (2x SG LTSPOTR5)
SG LTSPOTR5KIT - KIT (2x SG LTSPOTR5 + 1x SG LTSPOT)

LIGHT SOURCE

- 1x150W white led high brightness
- Color temperature: 7500K
- LED lifespan: > 50.000h
- LED refresh frequency: > 400Hz flicker-free

OPTIC SYSTEM

- Beam Angle: 13,2°
- Electronic focus
- Luminous flux: 6.170 lux @ 5mt (13,2°)

COLOR SYSTEM

- Color wheel with 7 colors + white

EFFECTS

- 6 dichroic rotating gobos, the gobos are interchangeable with the "plug & play" system. Gobo size 23,9mm / focus 15mm
- Bidirectional indexable gobos
- Gobo shacking effect
- Gobo scroll effect with adjustable speed
- Static Gobo wheel: 11 metal gobos + white
- 3-facets circular rotating prism with adjustable speed
- Color rainbow effect
- Linear dimmer 0-100%
- High speed electronic strobe max.25 flashes/s, with adjustable speed
- Random strobe and pulse dimmer effects with adjustable speed

CONTROL AND PROGRAMMING

- 3 DMX configurations available: 12/14/16 channels
- Protocol USITT DMX 512
- Pan&Tilt 8/16 bit selectable
- Master/Slave mode
- Reset via DMX



STRUCTURE AND CABINET


- Black metal housing and high resistance plastic ABS materials
- Color LCD display
- Selectable Pan angle 360° / 540° / 630°
- Selectable tilt angle 90° / 180° / 270°
- Mounting points: 1 pairs of 1/4-turn locks omega older
- Automatic repositioning of Pan and Tilt
- XLR 3-poles DMX IN/OUT connection
- IP rating: IP20
- Forced air cooling system with electronic control

POWER SUPPLY

- Input Voltage: AC~100-240V, 50/60 Hz
- Switching power supply unit
- Max power: 210W @ 230VAC
- Power input with PowerCON connector
- Power supply cable 1,0 mt included

WEIGHT AND DIMENSIONS

- Net weight: 10,5 kg
- Dimensions: 298x203x430 mm

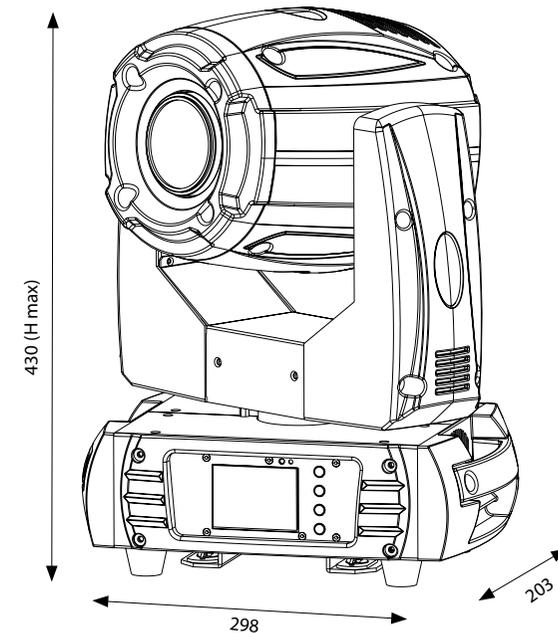



SG QUARTZ300 - PRODUCT CODE

SG CASEQUARTZ300 - CASE (2X SG QUARTZ300)

SG CASEQUARTZ300X4 - CASE (4X SG QUARTZ300)

SG QUARTZ300KIT - KIT (2X SG QUARTZ300 + 1X SG CASEQUARTZ300)

LIGHT SOURCE

- 19x15W RGBW Full Color led
- LED lifespan: >50.000h
- Led refresh frequency: >400Hz anti-flicker

OPTIC SYSTEM

- Beam angle: motorized zoom from 8° to 62°
- Luminous flux: 8600Lux (5m – full ON – 8°) / 800Lux (5m – full ON – 62°)

COLOR SYSTEM

- RGBW full color mixing
- Infinite chromatic possibilities

EFFECTS

- Linear dimmer 0-100%
- Electronic high speed strobe from 1 to 20 flashes/s, adjustable speed
- Random strobe and pulse effect with adjustable speed
- Single Pixel control
- Color macros and Pixel macros selectable from dmx

CONTROL AND PROGRAMMING

- 3 different dmx configurations: 14/20/92 channels
- Protocol USITT DMX 512
- Pan&Tilt 8/16 bit resolution selectable
- Master/Slave mode
- Reset via dmx

STRUCTURE AND CABINET


- Black metal housing and plastic covers with high resistance
- LCD color graphic display
- PAN 630°/540°/360° selection and TILT 270°/180°/90° selection
- Mounting points: 1 pair of ¼ turn lock omega holders
- Automatic Pan&Tilt repositioning after accidental movement
- 3 poles XLR in/out dmx signal connections
- IP20 protection grade
- Forced air fan cooling system with electronic control

POWER SUPPLY

- Input Voltage: AC~100-240V 50/60Hz
- Switching power supply unit
- Max power: 350W @ 230VAC
- Power in/out connection with Powercon sockets
- Power supply cable included

WEIGHT AND DIMENSIONS

- Net weight: 11,5 kg
- Dimensions: 420x205x450 mm

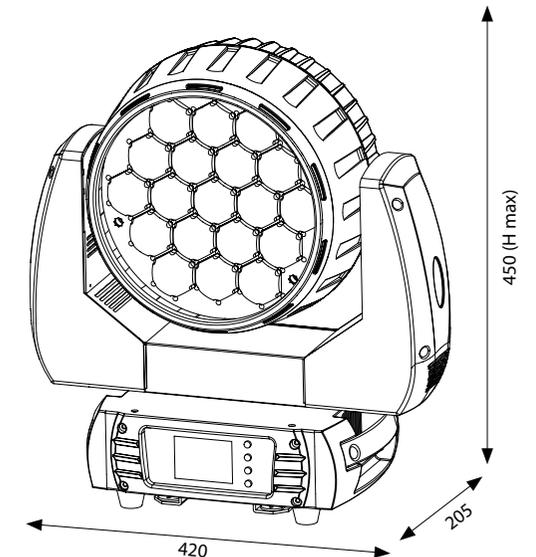

SG QUARTZ100 - PRODUCT CODE
SG CASEQUARTZ100 - CASE (4X SG QUARTZ100)

LIGHT SOURCE

- 7x15W RGBW Full Color led
- LED lifespan: >50.000h
- Led refresh frequency: >400Hz anti-flicker

OPTIC SYSTEM

- Beam angle: motorized zoom from 8° to 62°
- Luminous flux: 2167Lux (5m – full ON – 8°) / 154Lux (5m – full ON – 62°)

COLOR SYSTEM

- RGBW full color mixing
- Infinite chromatic possibilities

EFFECTS

- Linear dimmer 0-100%
- Electronic high speed strobe from 1 to 20 flashes/s, adjustable speed
- Random strobe and pulse effect with adjustable speed
- Single Pixel control
- Color macros and Pixel macros selectable from dmx

CONTROL AND PROGRAMMING

- 3 different dmx configurations: 14/20/44 channels
- Protocol USITT DMX 512
- Pan&Tilt 8/16 bit selectable resolution
- Master/Slave mode
- Reset via dmx

STRUCTURE AND CABINET


- Black metal housing and plastic covers with high resistance
- LCD color graphic display
- PAN 630°/540°/2700° selection and TILT 270°/180°/90° selection
- Mounting points: 1 pair of ¼ turn lock omega holders
- Automatic Pan&Tilt repositioning after accidental movement
- 3 poles XLR in/out dmx signal connections
- IP20 protection grade
- Forced air fan cooling system with electronic control

POWER SUPPLY

- Input Voltage: AC~100-240V 50/60Hz
- Switching power supply unit
- Max power: 110W @ 230VAC
- Power in/out connection with Powercon sockets
- Power supply cable included

WEIGHT AND DIMENSIONS

- Net weight: 6,2 kg
- Dimensions: 290x160x350 mm

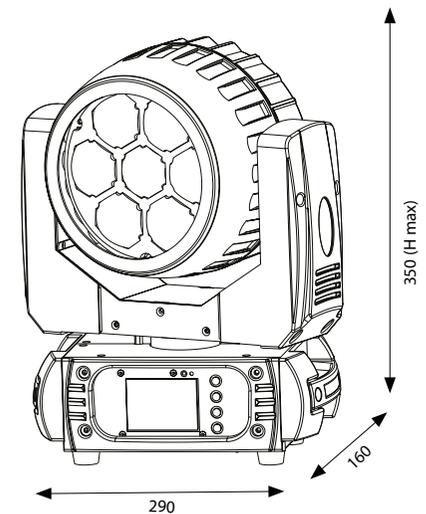

ACL LEDS





SG ACLBAR7MX - PRODUCT CODE
SG CASEACLBAR7MX - CASE (4X SG ACLBAR7MX)

LIGHT SOURCE

- 7x15W led RGBW Full Color
- LED lifespan: > 50.000h
- LED refresh frequency: > 400Hz flicker-free

OPTIC SYSTEM

- Beam Angle: 4°

COLOR SYSTEM

- LED source RGBW Full color
- Infinite chromatic possibilities

EFFECTS

- Linear dimmer 0-100%
- High speed electronic strobe max.25 flashes/s, with adjustable speed
- Random strobe and pulse dimmer effects with adjustable speed
- Color macros selectable via DMX
- Single pixel control

CONTROL AND PROGRAMMING

- 3 different DMX channels configurations: 12/15/39 channels
- Protocol USITT DMX 512
- Master/Slave mode
- Reset via DMX

STRUCTURE AND CABINET


- Black metal housing and high resistance plastic materials
- Blue LCD graphic display
- Infinite high precision Pan with adjustable speed
- Infinite high precision Tilt with adjustable speed
- Automatic repositioning of Pan and Tilt after accidental movements
- XLR 3-poles DMX IN/OUT connection
- IP rating: IP20
- Convection cooling system without fans


POWER SUPPLY

- Input Voltage: AC~100-240V, 50/60 Hz
- Switching power supply unit
- Max power: 120W @ 230VAC
- Power input with PowerCON connector IN/OUT
- Power supply cable 1mt included

WEIGHT AND DIMENSIONS

- Net weight: 10 kg
- Dimensions: 575x170x260 mm

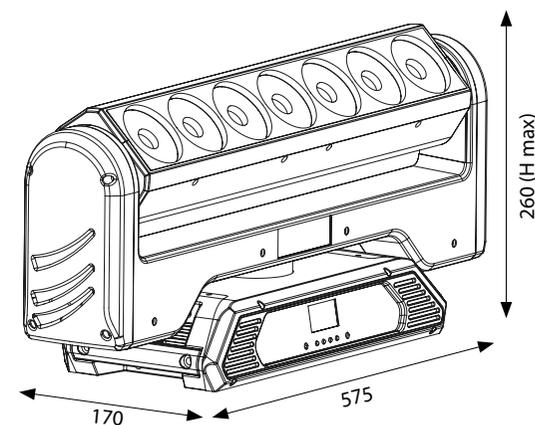

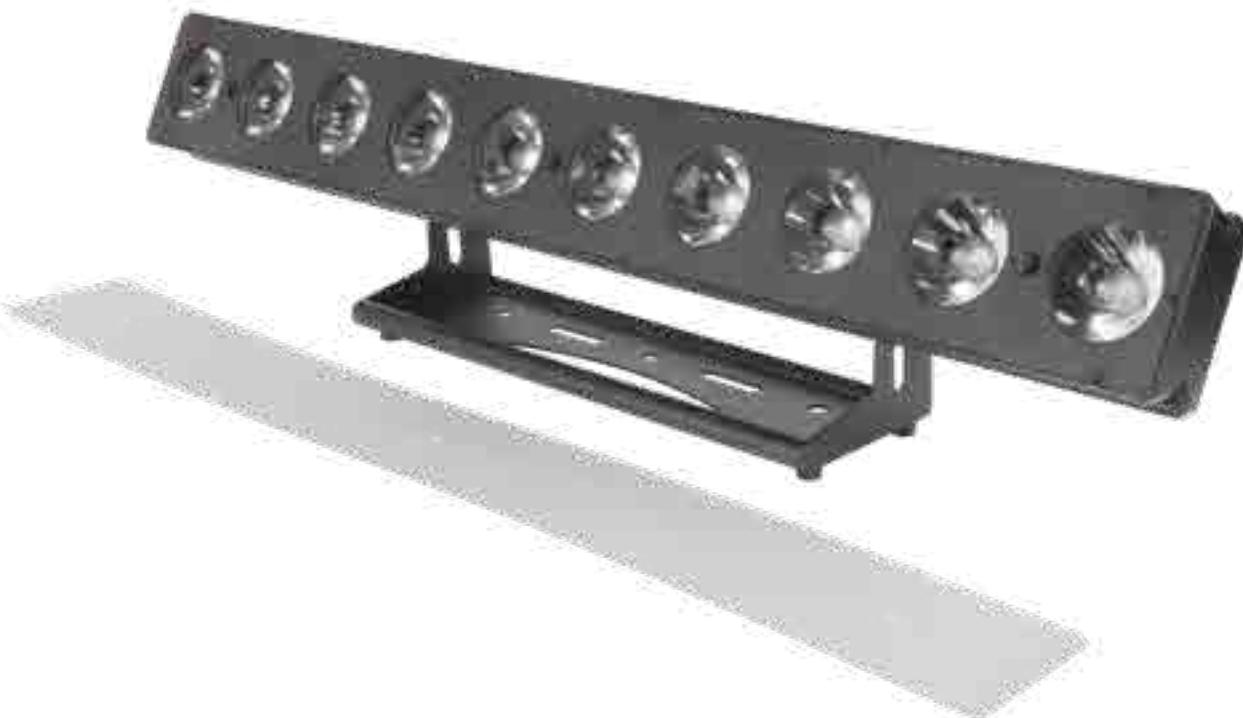

SG ACLBAR10 - PRODUCT CODE
SG CASEACLBAR - CASE (4X SG ACLBAR10)

LIGHT SOURCE

- 10x15W led RGBW Full Color
- LED lifespan: > 50.000h
- LED refresh frequency: > 400Hz flicker-free

OPTIC SYSTEM

- Beam Angle: 4°

COLOR SYSTEM

- LED source RGBW Full color
- Infinite chromatic possibilities

EFFECTS

- Linear dimmer 0-100%
- Adjustable strobe effect
- Color macros selectable via DMX
- Single pixel control
- Removable frost filter included

CONTROL AND PROGRAMMING

- 5 DMX configurations available: 4/6/8/40/44 channels
- Protocol USITT DMX 512
- Protocol Art-Net
- Master/Slave mode
- Auto mode
- Sound mode

STRUCTURE AND CABINET


- Die cast aluminium and metal housing, black color
- Blue LCD graphic display
- "Light up" positioning with adjustable angle
- IP rating: IP20
- DMX IN/OUT connectors 3/5 poles
- Art-Net connectors IN/OUT
- Convection cooling system without fans

POWER SUPPLY

- Input Voltage: AC~100-240V, 50/60 Hz
- Switching power supply unit
- Max power: 160W @ 230VAC
- Power input with PowerCON connector IN/OUT
- Power supply cable 1mt included

WEIGHT AND DIMENSIONS

- Net weight: 9,4 kg
- Dimensions: 880x159x172,5 mm

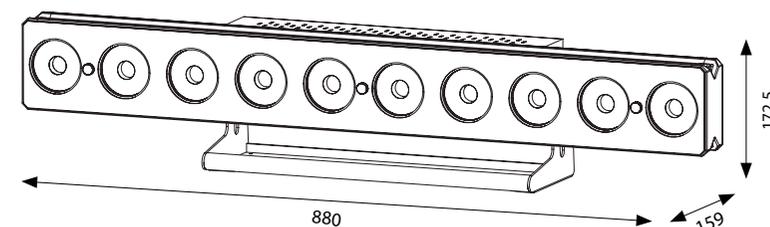



SG ACLBAR5 - PRODUCT CODE
SG CASEACLBAR - CASE (4X SG ACLBAR5)

LIGHT SOURCE

- 5x15W led RGBW Full Color
- LED lifespan: > 50.000h
- LED refresh frequency: > 400Hz flicker-free

OPTIC SYSTEM

- Beam Angle: 4°

COLOR SYSTEM

- LED source RGBW Full color
- Infinite chromatic possibilities

EFFECTS

- Linear dimmer 0-100%
- Adjustable strobe effect
- Color macros selectable via DMX
- Single pixel control
- Removable frost filter included

CONTROL AND PROGRAMMING

- 5 DMX configurations available: 4/6/8/20/24 channels
- Protocol USITT DMX 512
- Protocol Art-Net
- Master/Slave mode
- Auto mode
- Sound mode

STRUCTURE AND CABINET


- Die cast aluminium and metal housing, black color
- Blue LCD graphic display
- "Light up" positioning with adjustable angle
- IP rating: IP20
- DMX IN/OUT connectors 3/5 poles
- Art-Net connectors IN/OUT
- Convection cooling system without fans

POWER SUPPLY

- Input Voltage: AC~100-240V, 50/60 Hz
- Switching power supply unit
- Max power: 85W @ 230VAC
- Power input with PowerCON connector IN/OUT
- Power supply cable 1mt included

WEIGHT AND DIMENSIONS

- Net weight: 6 kg
- Dimensions: 440x160x172,5 mm

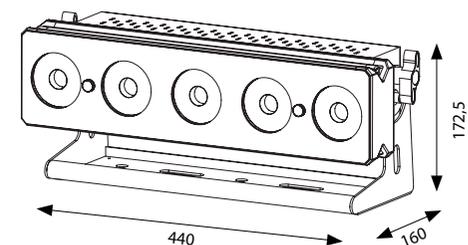



SG ACLPAR1 - PRODUCT CODE

LIGHT SOURCE

- 1x15W led RGBW Full Color
- LED lifespan: > 50.000h
- LED refresh frequency: > 400Hz flicker-free

OPTIC SYSTEM

- Beam Angle: 4°

COLOR SYSTEM

- LED source RGBW Full color
- Infinite chromatic possibilities

EFFECTS

- Linear dimmer 0-100%
- Adjustable strobe effect
- Color macros selectable via DMX
- Two removable frost filters included

CONTROL AND PROGRAMMING

- 3 DMX configurations available: 4/6/7 channels
- Protocol USITT DMX 512
- Master/Slave mode
- Auto mode
- Sound mode
- Remote controller included

STRUCTURE AND CABINET


- Die cast aluminium housing, black color
- OLED display
- "Light up" positioning with adjustable angle - double bracket
- IP rating: IP20
- DMX IN/OUT connectors 3 poles
- Convection cooling system without fans

POWER SUPPLY

- Input Voltage: AC~100-240V, 50/60 Hz
- Switching power supply unit
- Max power: 16W @ 230VAC
- Power input with PowerCON connector IN/OUT
- Power supply cable 1mt included

WEIGHT AND DIMENSIONS

- Net weight: 1,2 kg
- Dimensions: 134,5x172,25x202,5 mm

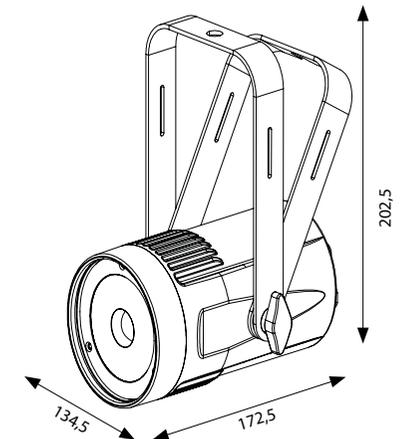

ARCHITECTURAL LEDS





- SG QUARIUXRGB** - PRODUCT CODE RGB VERSION
- SG QUARIUXRGBZ** - PRODUCT CODE RGB VERSION ZOOM
- SG QUARIUXRGBW** - PRODUCT CODE RGBW VERSION
- SG QUARIUXRGBWZ** - PRODUCT CODE RGBW VERSION ZOOM
- SG QUARIUXRGBL** - PRODUCT CODE RGB-LIME VERSION
- SG QUARIUXRGBLZ** - PRODUCT CODE RGB-LIME VERSION ZOOM
- SG QUARIUXWW** - PRODUCT CODE WARM WHITE VERSION
- SG QUARIUXCW** - PRODUCT CODE COLD WHITE VERSION
- SG QUARIUXVW** - PRODUCT CODE VARIABLE WHITE VERSION
- SG CASEQUARIUX** - CASE (6x SG QUARIUX)

LIGHT SOURCE

- 6x40W COB led
- LED lifespan: >50.000h
- LED refresh frequency: >500Hz flicker free

OPTIC SYSTEM

- Beam angle: 12° (standard)
- SSZ: Solid State Zoom (from 12° to 90°) upon request
- Optional optic: 24° - 48° - 80° - 12°x90° (asymmetric)

COLOR SYSTEM

- 3 in 1 led source RGB Full Color (standard)
- Available possibilities: RGBW – RGBL – WW – CW – VW
- Macro colors selectable via DMX
- Halogen and CMY Simulation

EFFECTS

- Linear dimmer 16 bit 0 - 100%
- Electronic strobo 1-20 flash/s adjustable speed
- Overboost Blinder

CONTROL AND PROGRAMMING

- DMX configurations available: 1/2/3/5/7/10 channels
- 4 dimmer curves selectable
- Protocol USITT DMX 512
- Master/Slave mode
- Presetted macro colors with speed regulation
- Static Color: static reproduction of one color
- Touch pad with led indicators
- Integrated wireless DMX

STRUCTURE


- Aluminium structure, available in black or customizable with other colors
- High tightness Lexan, resistant to cuts and perforations
- Fast coupling system
- Bracket for anchoring and ground support
- IP rating: IP 67
- Convection cooling system without fans
- Optional barndoor
- Operating temperature -20°C ~ 40°C

POWER SUPPLY

- Input Voltage: ~88-264Vac 47/63Hz
- Universal switching power supply
- Double temperature control
- Max power: 200W @ 230VAC
- IN/OUT power connection

WEIGHT AND DIMENSIONS

- Net weight: 5,7 kg
- Dimension: 495x74x95 mm

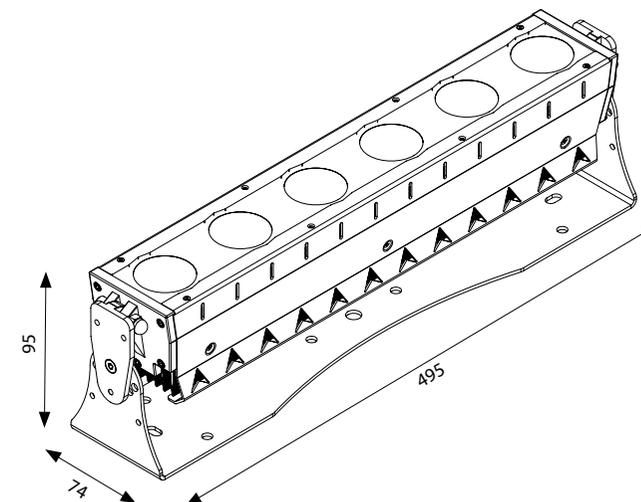



SG IPLED40C - PRODUCT CODE

LIGHT SOURCE

- 40x10W led RGBW Full Color
- LED lifespan: > 50.000h
- LED refresh frequency: > 400Hz flicker-free

OPTIC SYSTEM

- Beam Angle: 40°
- Optional: 10° x 30° and 15°

COLOR SYSTEM

- LED source RGBW Full color
- Infinite chromatic possibilities

EFFECTS

- Linear dimmer 0-100%
- Adjustable strobe effect
- Color macros selectable via DMX

CONTROL AND PROGRAMMING

- 4 DMX configurations available: 3/4/6/11 channels
- Key lock password for display lock
- Wireless DMX receiver by wireless Solution Integrated
- Protocol USITT DMX 512
- Master/Slave mode

- Color mode with 52 different programs selectable from the display
- Automatic mode with 21 different programs selectable from the display
- Edit mode with 11 different programs selectable from the display
- 11 white Balance selection
- 4 dimmer curve

STRUCTURE AND CABINET


- Die cast aluminium housing
- Color grafic LCD display
- Front tempered glass
- "Light up" positioning with adjustable angle
- IP rating: IP65
- DMX IN/OUT connectors IP65
- Convection cooling system without fans

POWER SUPPLY

- Input Voltage: AC~100-240V, 50/60 Hz
- Switching power supply unit
- Max power: 400W @ 230VAC
- IN/OUT power connection IP65 IPowerCON True ONE

WEIGHT AND DIMENSIONS

- Net weight: 11,6 kg
- Dimensions: 555x260x275 mm

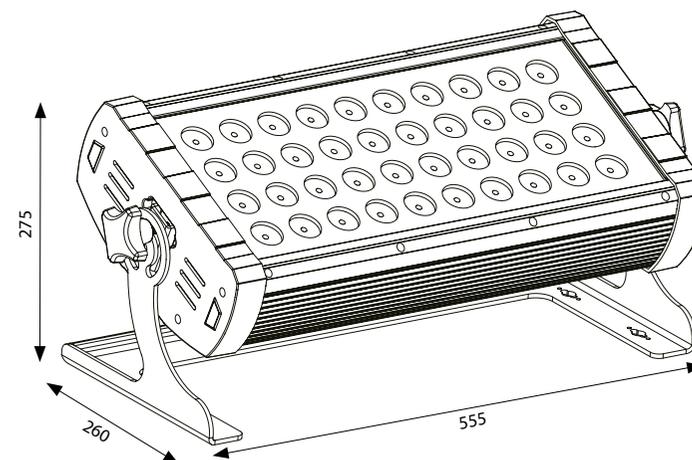



SG IPLED24C - PRODUCT CODE

LIGHT SOURCE

- 24x8W led RGBW Full Color
- LED lifespan: > 50.000h
- LED refresh frequency: > 400Hz flicker-free

OPTIC SYSTEM

- Beam Angle: 25°

COLOR SYSTEM

- LED source RGBW Full color
- Infinite chromatic possibilities

EFFECTS

- Linear dimmer 0-100%
- Adjustable strobe effect
- Color macros selectable via DMX

CONTROL AND PROGRAMMING

- 3 DMX configurations available: 3/6/7 channels
- Key lock password for display lock
- Protocol USITT DMX 512
- Master/Slave mode
- Auto mode
- Remote controller included

STRUCTURE AND CABINET


- Die cast aluminium housing
- Blue LCD graphic display
- Front tempered glass
- "Light up" positioning with adjustable angle
- IP rating: IP65
- DMX IN/OUT connectors IP65
- Convection cooling system without fans

POWER SUPPLY

- Input Voltage: AC~100-240V, 50/60 Hz
- Switching power supply unit
- Max power: 200W @ 230VAC
- IN/OUT power connection IP65

WEIGHT AND DIMENSIONS

- Net weight: 8,4 kg
- Dimensions: 288x130x325,6 mm

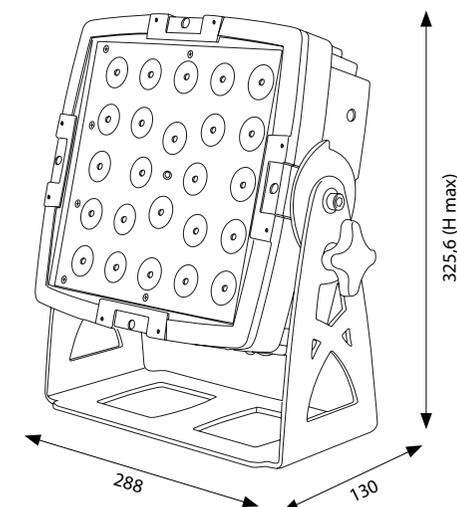

SG IPLED9C - PRODUCT CODE

LIGHT SOURCE

- 9x8W led RGBW Full Color
- LED lifespan: > 50.000h
- LED refresh frequency: > 400Hz flicker-free

OPTIC SYSTEM

- Beam Angle: 25°

COLOR SYSTEM

- LED source RGBW Full color
- Infinite chromatic possibilities

EFFECTS

- Linear dimmer 0-100%
- Adjustable strobe effect
- Color macros selectable via DMX

CONTROL AND PROGRAMMING

- 3 DMX configurations available: 3/6/7 channels
- Key lock password for display lock
- Protocol USITT DMX 512
- Master/Slave mode
- Auto mode
- Remote controller included

STRUCTURE AND CABINET


- Die cast aluminium housing
- LCD graphic display
- Front tempered glass
- "Light up" positioning with adjustable angle
- IP rating: IP65
- DMX IN/OUT connectors IP65
- Convection cooling system without fans

POWER SUPPLY

- Input Voltage: AC~100-240V, 50/60 Hz
- Switching power supply unit
- Max power: 80W @ 230VAC
- IN/OUT power connection IP65

WEIGHT AND DIMENSIONS

- Net weight: 3,8 kg
- Dimensions: 202x122,3x222 mm

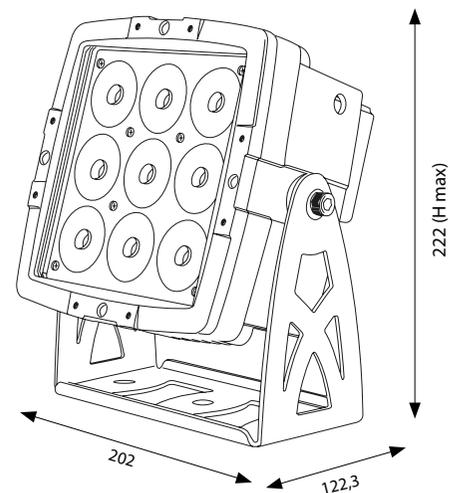

ARCHITECTURAL LEDS IP LED BAR 12C



SG IPLEDBAR12C- PRODUCT CODE

LIGHT SOURCE

- 12x8W led RGBW Full Color
- LED lifespan: > 50.000h
- LED refresh frequency: > 400Hz flicker-free
- Optic system
- Beam Angle: 15°
- Luminous flux: 1221 lux @3mt

COLOR SYSTEM

- LED source RGBW Full color
- Infinite chromatic possibilities

EFFECTS

- Linear dimmer 0-100%
- Adjustable strobe effect
- Color macros selectable via DMX
- 2 sector control system

CONTROL AND PROGRAMMING

- 5 DMX configurations available: 3/4/7/8/10 channels
- Protocol USITT DMX 512
- Master / Slave mode
- Static color mode
- Automatic mode with 5 different programs selectable from the display

- Effect mode with 8 different programs selectable from the display
- Color mode with 6 different programs selectable from the display
- 4 dimmer curve

STRUCTURE AND CABINET

- Die cast aluminium housing
- OLED display
- Soft touch button
- Front tempered glass
- Antiglare blade (included)
- "Light up" positioning with adjustable angle
- IP rating: IP65
- DMX IN/OUT connectors IP65
- Convection cooling system without fans


POWER SUPPLY

- Input Voltage: AC~100-240V, 50/60 Hz
- Switching power supply unit
- Max power: 96W @ 230VAC
- IN/OUT power connection IP65

WEIGHT AND DIMENSIONS

- Net weight: 3,3 kg
- Dimensions: 483x60x135 mm

NEW

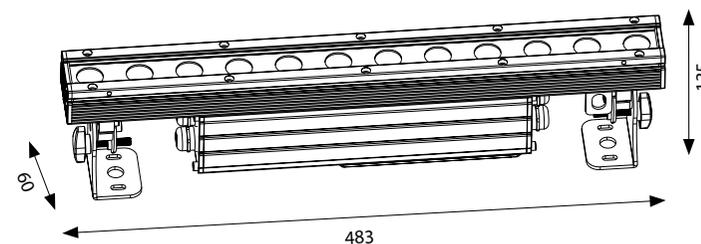



SG IPLEDBAR24C - PRODUCT CODE

LIGHT SOURCE

- 24x8W led RGBW Full Color
- LED lifespan: > 50.000h
- LED refresh frequency: > 400Hz flicker-free

OPTIC SYSTEM

- Beam Angle: 15°
- Luminous flux: 1221 lux @3mt

COLOR SYSTEM

- LED source RGBW Full color
- Infinite chromatic possibilities

EFFECTS

- Linear dimmer 0-100%
- Adjustable strobe effect
- Color macros selectable via DMX
- 4 sector control system

CONTROL AND PROGRAMMING

- 7 DMX configurations available: 3/4/7/8/10/16/20 channels
- Protocol USITT DMX 512
- Master / Slave mode
- Static color mode
- Automatic mode with 5 different programs selectable from the display
- Effect mode with 8 different programs selectable from the display
- Color mode with 6 different programs selectable from the display
- 4 dimmer curve

STRUCTURE AND CABINET


- Die cast aluminium housing
- OLED display
- Soft touch button
- Front tempered glass
- Antiglare blade (included)
- "Light up" positioning with adjustable angle
- IP rating: IP65
- DMX IN/OUT connectors IP65
- Convection cooling system without fans

POWER SUPPLY

- Input Voltage: AC~100-240V, 50/60 Hz
- Switching power supply unit
- Max power: 192W @ 230VAC
- IN/OUT power connection IP65

WEIGHT AND DIMENSIONS

- Net weight: 5,6 kg
- Dimensions: 965x60x135 mm

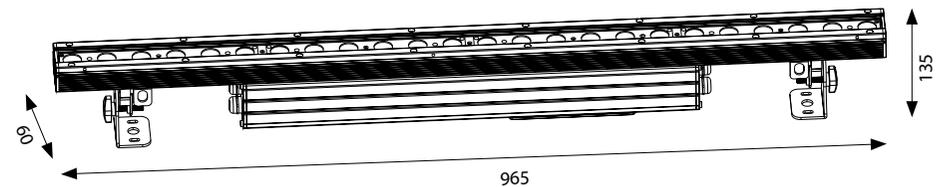



SG IPLEDMC BAR54RGB - PRODUCT CODE
SG IPLEDMC BOX - DMX CONTROL BOX

LIGHT SOURCE

- 54x3W led RGB
- LED lifespan: > 50.000h
- LED refresh frequency: > 400Hz flicker-free

OPTIC SYSTEM

- Beam Angle: 60x10°

COLOR SYSTEM

- LED source RGB
- Infinite chromatic possibilities

EFFECTS

(with controller SG IPLEDMC BOX sold separately)

- Linear dimmer 0-100%
- Adjustable strobe effect
- Color macros selectable via DMX

CONTROL AND PROGRAMMING

(with controller SG IPLEDMC BOX sold separately)

- 5 DMX configurations available: 1/3/4/7/10 channels
- Protocol USITT DMX 512
- Master/Slave mode
- Auto mode

STRUCTURE AND CABINET


- Die cast aluminium housing
- Front tempered glass
- "Light up" positioning with adjustable angle
- IP rating: IP65
- Power and DMX IN/OUT connector IP65
- Convection cooling system without fans


POWER SUPPLY

- Input Voltage: AC~100-240V, 50/60 Hz
- Switching power supply unit
- Power and DMX IN/OUT connector IP65

WEIGHT AND DIMENSIONS

- Net weight: 1,9 kg (bar) – 0,5 kg (controller)
- Dimensions: 395x55x85 mm (bar) – 195x97x59 mm (controller)

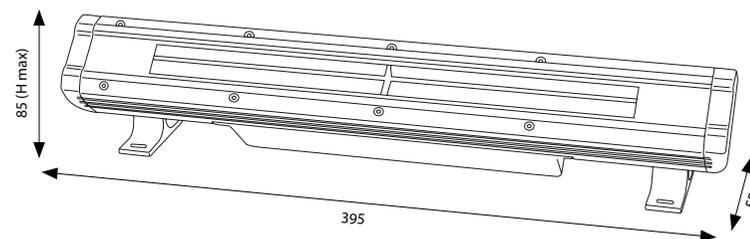

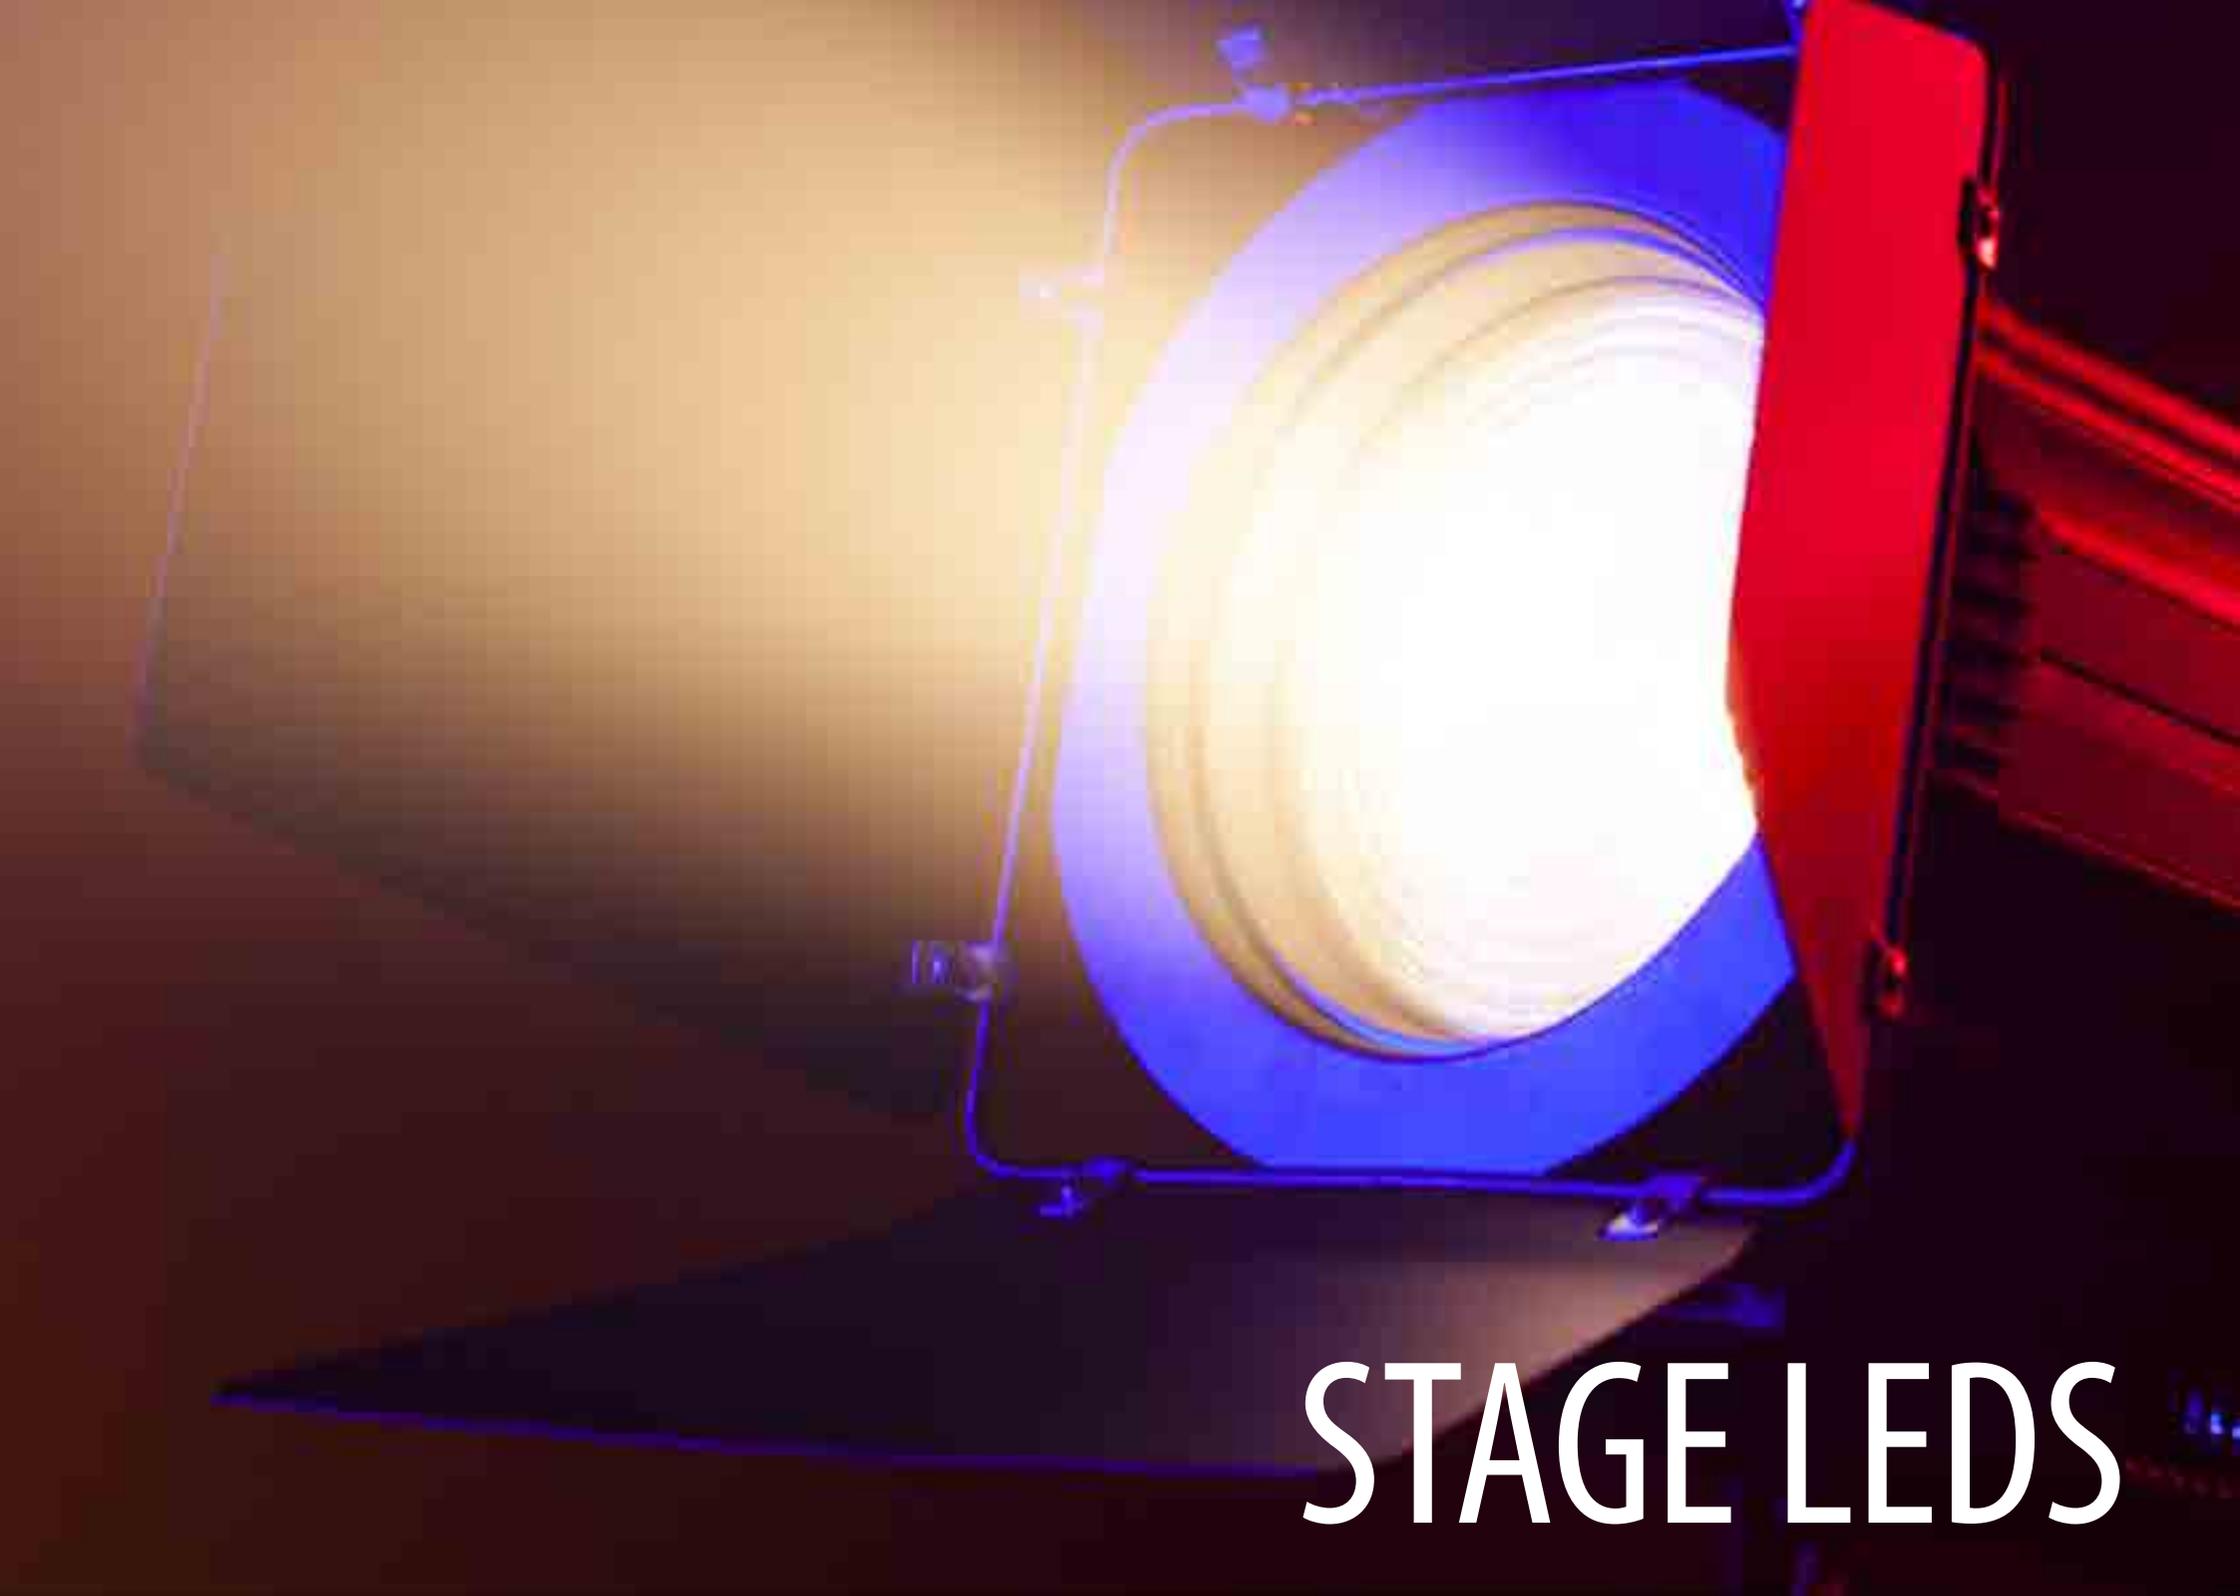

STAGE LEDS



SG SAGOLEDWW300 - PRODUCT CODE WARM WHITE VERSION
SG SAGOLED CW300 - PRODUCT CODE COLD WHITE VERSION
SG CASESAGOLED300 - CASE (4x SG SAGOLED300)

LIGHT SOURCE

- 1x300W Led Warm White 3200K
- CRI \90Ra
- LED lifespan: >50.000h
- LED refresh frequency: >400Hz flicker free

OPTIC SYSTEM

- Beam angle: 19° (included)
- Optional: 26° - 36° - 50°
- Luminous flux: 6150 lux @5mt (19°)

COLOR SYSTEM

- Warm White 3200K COB LED Source

EFFECTS

- Linear dimmer 0-100%
- Electronic strobe: 1-20 flashes/s with adjustable speed

CONTROL AND PROGRAMMING

- 2 DMX channels configuration: 1/2 channels
- Protocol USITT DMX 512

STRUCTURE AND CABINET


- High resistance black Alluminium housing
- Blue LED graphic display
- Mounting points: single bracket for suspension
- Gel filter frame included
- Gobo holder included
- Iris (sold separately)
- 3-poles XLR in/out connection
- IP rating: IP20
- Forced Air fan cooling system with electronic control " Low Noise"

POWER SUPPLY

- Input Voltage: AC~100-240V 50/60Hz
- Switching power supply unit
- Max power: 350W @ 230VAC
- Power supply cable included

WEIGHT AND DIMENSIONS

- Net weight: 10,5kg
- Dimensions: 690x360x465 mm

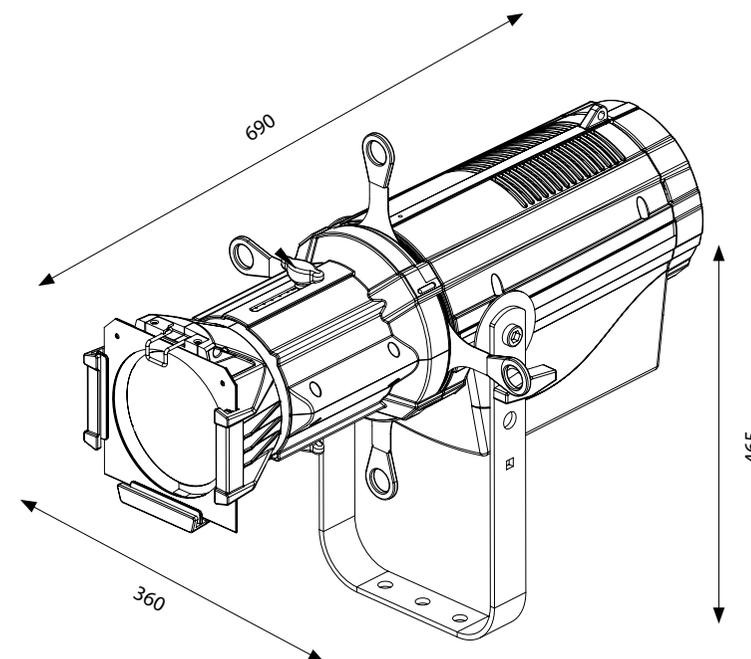

SG SAGOLEDWW - PRODUCT CODE WARM WHITE VERSION
SG SAGOLEDW - PRODUCT CODE COLD WHITE VERSION
SG CASESAGOLED - CASE (4x SG SAGOLEDWW)

LIGHT SOURCE

- 1x120W Led Warm white 3200K
- LED lifespan: >50.000h
- LED refresh frequency: >400Hz flicker free

OPTIC SYSTEM

- Beam angle: 19° (included)
- Optional: 26° - 36° - 50°
- Luminous flux: 2950 lux @5mt (19°)

COLOR SYSTEM

- Warm White 3200K LED Source

EFFECTS

- Linear dimmer 0-100%
- Electronic strobe: 1-20 flashes/s with adjustable speed

CONTROL AND PROGRAMMING

- 1 DMX channels configuration: 2 channels
- Protocol USITT DMX 512
- Master / Slave mode
- Auto mode: 2 programs can be selected from display

STRUCTURE AND CABINET


- High resistance black plastic housing
- Red LED graphic display
- Mounting points: single bracket for suspension
- Gel filter frame included
- Gobo holder included
- Iris (sold separately)
- 3-poles XLR in/out connection
- IP rating: IP20
- Forced Air fan cooling system with electronic control

POWER SUPPLY

- Input Voltage: AC~100-240V 50/60Hz
- Switching power supply unit
- Max power: 150W @ 230VAC
- Power supply cable 1,5 mt

WEIGHT AND DIMENSIONS

- Net weight: 4,8 kg
- Dimensions: 643x360x465 mm

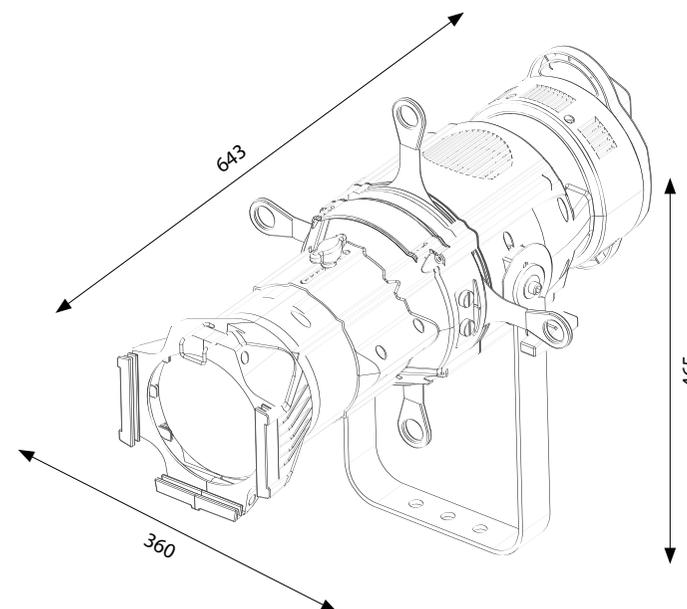



SG SAGOLEDWWM - PRODUCT CODE WARM WHITE VERSION
SG SAGOLEDWWM - PRODUCT CODE COLD WHITE VERSION
SG CASESAGOLEDM - CASE (4x SG SAGOLEDWWM)

LIGHT SOURCE

- 1x60W Led Warm white 3200K
- LED lifespan: > 50.000h
- LED refresh frequency: > 400Hz flicker-free

OPTIC SYSTEM

- Beam Angle: 19° (included)
- Optional: 26° - 36° - 50°

COLOR SYSTEM

- Warm White 3200K LED Source

EFFECTS

- Linear dimmer 0-100%
- Strobe: electronic 1-20 flashes/s with adjustable speed

CONTROL AND PROGRAMMING

- 1 DMX configurations available: 2 channels
- Protocol USITT DMX 512
- Master/Slave mode
- Auto mode: 2 programs can be selected from display

STRUCTURE AND CABINET


- High resistance black plastic housing
- Red LED display
- Mounting points: single bracket
- Gel filter frame included
- Gobo holder included
- Iris not included (sold separately)
- XLR 3-poles DMX IN/OUT connection with external USB box
- IP rating: IP20
- Controlled forced air fan cooling system "low noise"

POWER SUPPLY

- Input Voltage: AC~100-240V, 50/60 Hz
- Switching power supply unit
- Max power: 70W @ 230VAC
- IN/OUT power connection
- Power supply cable 1mt included
- Max 4 pcs linkable @ 240V

WEIGHT AND DIMENSIONS

- Net weight: 2,2 kg
- Dimensions: 158x305x238 mm

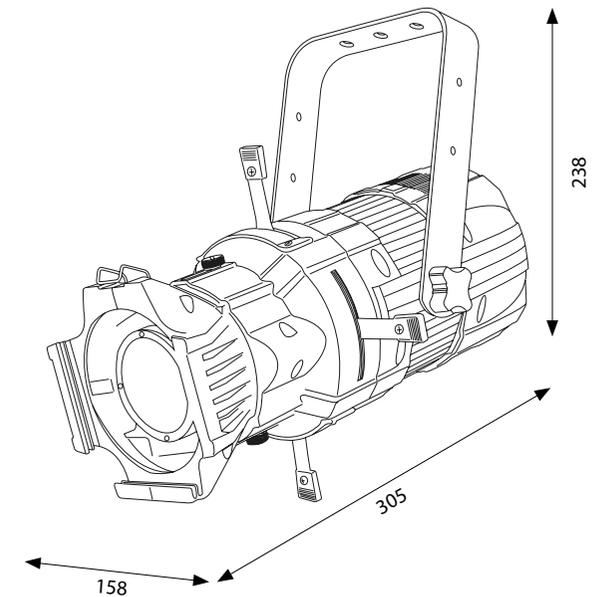

SG HALOFWW - PRODUCT CODE WARM WHITE VERSION
SG HALOFCW - PRODUCT CODE COLD WHITE VERSION
SG CASEHALOFR - CASE (4x SG HALOFWW)



LIGHT SOURCE

- 1X200W led COB Warm White 3200K
- CRI ≥85Ra
- LED lifespan: >50.000h
- LED refresh frequency: >400Hz flicker-free

OPTIC SYSTEM

- Beam angle: zoom from 15° to 55°
- Luminous flux: 2500 lux @5mt (15°)
- Luminous flux: 1390 lux @5mt (55°)

COLOR SYSTEM

- Warm White 3200K COB LED Source

EFFECTS

- Linear dimmer 0-100%
- Strobe: electronic 1-20 flashes/s with adjustable speed

CONTROL AND PROGRAMMING

- 2 different DMX channels configurations: 2/3 channels
- Protocol USITT DMX 512
- Manual mode for dimmer and zoom adjustment
- Direct manual control for zoom on the rear panel

STRUCTURE AND CABINET


- Black aluminum housing
- LCD blue graphic display
- Mounting points: single bracket for suspension
- Rotating barn door with "safety cable" (included)
- Single handle in the rear side for easy transportation
- 3/5-poles XLR in/out connection
- IP rating: IP 20
- Forced air cooling system "low noise" with fans for high efficiency and very low noise

POWER SUPPLY

- Input Voltage: AC~100-240V 50/60Hz
- Switching power supply unit
- Max power: 250W @ 230VAC
- IN / OUT power connection with powercon sockets
- Power supply cable 1,5 mt included
- Max 4 pcs linkable @240V

WEIGHT AND DIMENSIONS

- Net Weight: 8,4 kg
- Dimensions: 260x450x310 mm

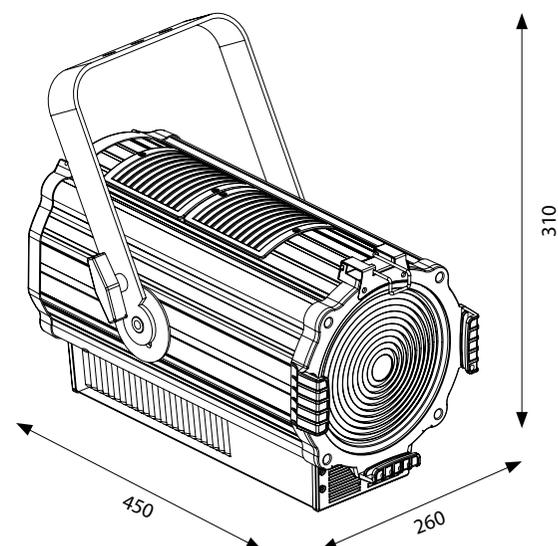



SG HALOFWWM - PRODUCT CODE WARM WHITE VERSION
SG HALOFCWM - PRODUCT CODE COLD WHITE VERSION
SG CASEHALOFR - CASE (4x SG HALOFWWM)

LIGHT SOURCE

- 1x100W Led COB Warm white 3200K
- CRI ≥ 85Ra
- LED lifespan: > 50.000h
- LED refresh frequency: > 400Hz flicker-free

OPTIC SYSTEM

- Beam Angle: manual zoom from 15° to 55°
- Luminous flux: 1683lux @ 5mt (15°)
- Luminous flux: 886lux @ 5mt (55°)

COLOR SYSTEM

- Warm White 3200K COB LED Source

EFFECTS

- Linear dimmer 0-100%
- Strobe: electronic 1-20 flashes/s with adjustable speed

CONTROL AND PROGRAMMING

- 2 DMX configurations available: 1/2 channels
- Protocol USITT DMX 512
- Manual dimmer mode

STRUCTURE AND CABINET


- Aluminium housing black color
- LCD blue graphic display
- Mounting points: single bracket
- Rotating barn door with "safety cable" included
- XLR 3/5-poles DMX IN/OUT connection
- IP rating: IP20
- Controlled forced air fan cooling system "low noise"

POWER SUPPLY

- Input Voltage: AC~100-240V, 50/60 Hz
- Switching power supply unit
- Max power: 150W @ 230VAC
- IN/OUT power connection with PowerCON sockets
- Power supply cable 1mt included
- Max 8 pcs linkable @ 240V

WEIGHT AND DIMENSIONS

- Net weight: 7 kg
- Dimensions: 260x330x310 mm (without barn door)

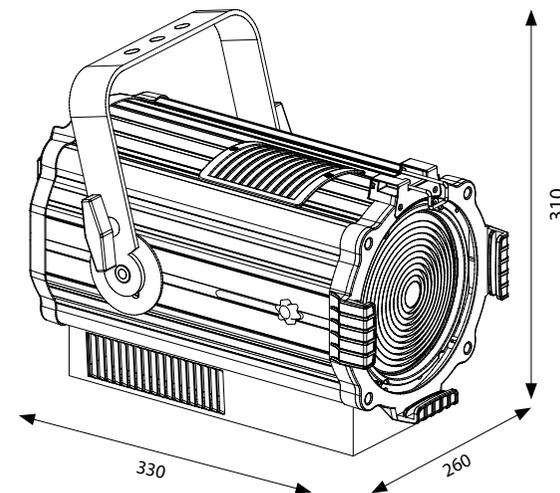

SG HALOFWWM60 - PRODUCT CODE WARM WHITE VERSION
SG HALOFCWM60 - PRODUCT CODE COLD WHITE VERSION
SG CASEHALOFM - CASE (4X SG HALOFWWM60)

LIGHT SOURCE

- 1x60W Led COB Warm white 3200K
- CRI ≥ 85Ra
- LED lifespan: > 50.000h
- LED refresh frequency: > 400Hz flicker-free

OPTIC SYSTEM

- Beam Angle: manual zoom from 15° to 55°
- Luminous flux: 1490lux @ 5mt (15°)
- Luminous flux: 530lux @ 5mt (55°)

COLOR SYSTEM

- Warm White 3200K LED Source

EFFECTS

- Linear dimmer 0-100%
- Strobe: electronic 1-20 flashes/s with adjustable speed

CONTROL AND PROGRAMMING

- 1 DMX configurations available: 2 channels
- Protocol USITT DMX 512
- Manual dimmer mode

STRUCTURE AND CABINET


- High resistance plastic housing
- Red LED display
- Mounting points: single bracket
- Rotating barndoor with "safety cable" included
- XLR 3-poles DMX IN/OUT connection
- IP rating: IP20
- Controlled forced air fan cooling system "low noise"

POWER SUPPLY

- Input Voltage: AC~100-240V, 50/60 Hz
- Switching power supply unit
- Max power: 70W @ 230VAC
- IN/OUT power connection with PowerCON sockets
- Power supply cable 1mt included
- Max 4 pcs linkable @ 240V

WEIGHT AND DIMENSIONS

- Net weight: 2 kg
- Dimensions: 165x260x230 mm (without barndoor)

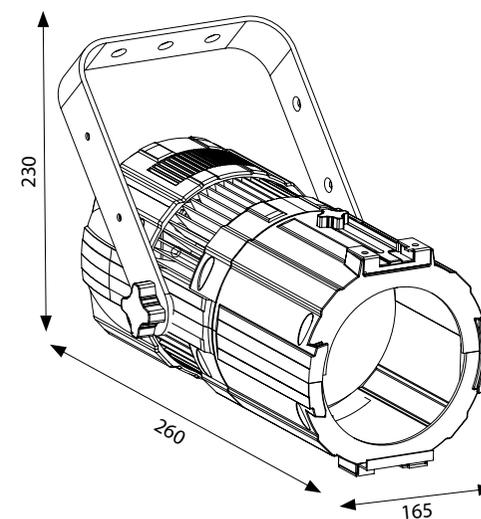



SG HALOPWW1528 - PRODUCT CODE WARM WHITE VERSION
SG HALOPCW1528 - PRODUCT CODE COLD WHITE VERSION
SG CASEHALOPR - CASE (4X SG HALOPWW1528)

LIGHT SOURCE

- 1X200W led COB Warm White 3200K
- CRI \geq 85Ra
- LED lifespan: >50.000h
- LED refresh frequency: >400Hz flicker-free

OPTIC SYSTEM

- Beam angle: zoom from 15° to 28°
- Luminous flux: 4090lux @5mt (15°)
- Luminous flux: 1800lux @5mt (28°)

COLOR SYSTEM

- Warm White 3200K COB LED Source

EFFECTS

- Linear dimmer 0-100%
- Strobe: electronic 1-20 flashes/s with adjustable speed

CONTROL AND PROGRAMMING

- 2 different DMX channels configurations: 1/2 channels
- Protocol USITT DMX 512

STRUCTURE AND CABINET


- Black aluminum housing
- LCD blue graphic display
- Mounting points: single bracket for suspension
- Single handle in the rear side for easy transportation
- Gel filter frame included
- Gobo holder included
- Iris (sold separately)
- 3/5-poles XLR in/out connection
- IP rating: IP 20
- Forced air cooling system "low noise" with fans for high efficiency and very low noise

POWER SUPPLY

- Input Voltage: AC~100-240V 50/60Hz
- Switching power supply unit
- Max power: 250W @ 230VAC
- IN / OUT power connection with powercon sockets
- Power supply cable 1,5 mt included
- Max 4 pcs linkable @240V

WEIGHT AND DIMENSIONS

- Net Weight: 10kg
- Dimensions: 275x745x410 mm

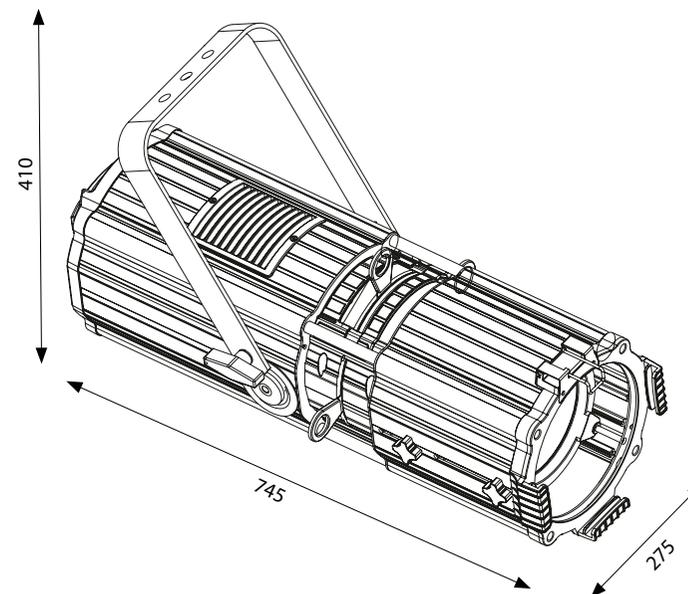

SG HALOPWW2045 - PRODUCT CODE WARM WHITE VERSION
SG HALOPCW2045 - PRODUCT CODE COLD WHITE VERSION
SG CASEHALOPR - CASE (4X SG HALOPWW2045)



LIGHT SOURCE

- 1X200W LED COB Warm White 3200K
- CR ≥85Ra
- LED lifespan > 50.000h
- LED refresh frequency: > 400Hz flicker free

OPTIC SYSTEM

- Beam angle: zoom from 20° to 45°
- Luminous flux: 2950lux@5mt (20°)
- Luminous flux: 1550lux@5mt (45°)

COLOR SYSTEM

- Warm White 3200K COB LED Source

EFFECTS

- Linear dimmer 0 - 100%
- Strobe: electronic 1-20 flashes/s with adjustable speed

CONTROL AND PROGRAMMING

- 2 different DMX channels configurations: 1/2 channels
- Protocol USITT DMX 512

STRUCTURE AND CABINET


- Black aluminium housing
- LCD blue graphic display
- Fixing system with adjustable bracket
- Single handle in the rear side of the projector for easy transportation
- Gel filter frame included
- Gobo holder included
- Iris (sold separately)
- DMX control signal input and output XLR 3 poles
- IP rating: IP 20
- "low noise" controlled forced ventilation cooling system

POWER SUPPLY

- Input voltage: AC~100-240V 50/60Hz
- Switching power supply unit
- Max power: 250W @ 230VAC
- IN/OUT power connection with powercon sockets
- Power supply cable 1,5 mt included
- Max 4 pcs linkable@240V

WEIGHT AND DIMENSIONS

- Net Weight: 10kg
- Dimension: 275x645x410 mm

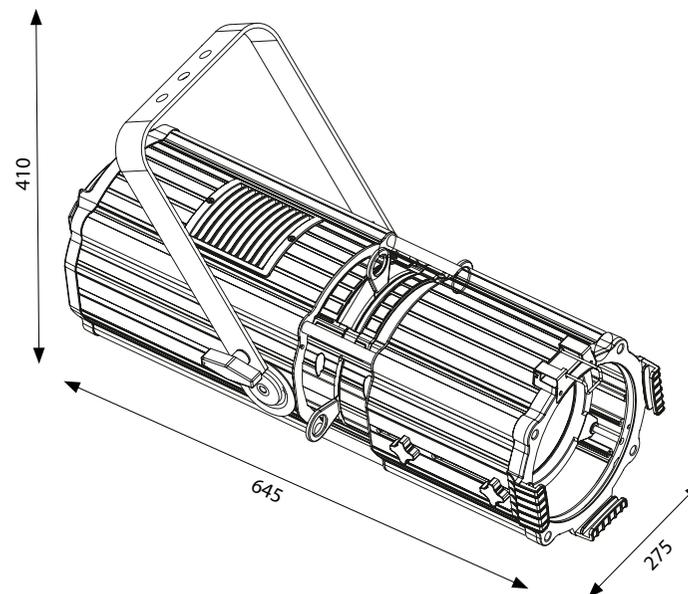

STAGE LEDS STUDIO LED PANEL RGB



SG STUDIOPRGB - PRODUCT CODE
SG CASESTUDIOP - CASE (4x SG STUDIOP)

LIGHT SOURCE

- 1456 RGB leds
- LED lifespan: >50.000h
- LED refresh frequency: >400Hz flicker-free

OPTIC SYSTEM

- Beam angle: 110°

COLOR SYSTEM

- RGB led color mixing

EFFECTS

- Linear Dimmer 0-100%
- Adjustable Strobe

CONTROL AND PROGRAMMING

- 1 DMX configuration available: 6 channels
- Protocol USITT DMX 512
- Master/Slave mode

STRUCTURE AND CABINET

- Die cast aluminum housing
- Blue LCD graphic display
- 3/5 poles XLR in/out dmx signal connections
- Convection cooling system without fans
- Barndoor included


POWER SUPPLY

- Input Voltage: AC~100-240V, 50/60 Hz
- Switching power supply unit
- Max power: 250W @ 230VAC
- Power supply cable included

WEIGHT AND DIMENSIONS

- Net weight: 11,5 kg
- Dimensions: 490x150x275 mm

NEW

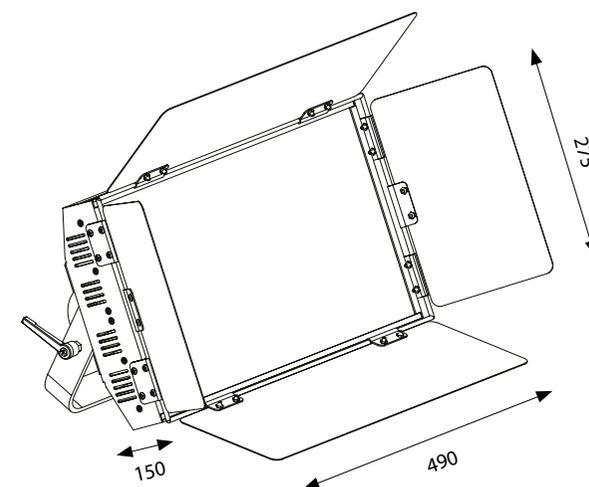



SG STUDIOPWW - PRODUCT CODE WARM WHITE VERSION
SG STUDIOPCW - PRODUCT CODE COLD WHITE VERSION
SG CASESTUDIOP - CASE (4x SG STUDIOP)

LIGHT SOURCE

- 1456 Warm White 3200K leds
- CRI ≥ 90 Ra
- LED lifespan: >50.000h
- LED refresh frequency: >400Hz flicker-free

OPTIC SYSTEM

- Beam angle: 110°

EFFECTS

- Linear Dimmer 0-100%
- Adjustable Strobe

CONTROL AND PROGRAMMING

- 2 DMX configuration available: 1/2 channels
- Protocol USITT DMX 512
- Master/Slave mode

STRUCTURE AND CABINET


- Die cast aluminum housing
- Blue LCD graphic display
- 3/5 poles XLR in/out dmx signal connections
- Convection cooling system without fans
- Barndoor included

POWER SUPPLY

- Input Voltage: AC~100-240V, 50/60 Hz
- Switching power supply unit
- Max power: 250W @ 230VAC
- Power supply cable included

WEIGHT AND DIMENSIONS

- Net weight: 11,5 kg
- Dimensions: 490x150x275 mm

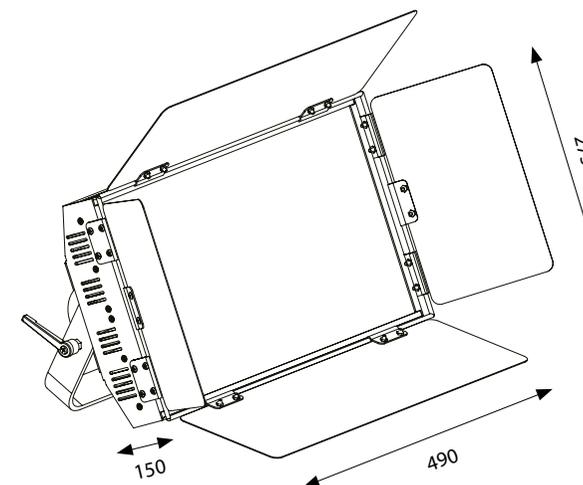

STAGE LEDS BLAZER 1500 STROBE



SG BLAZER1500 - PRODUCT CODE
SG CASEBLAZER - CASE (2x SG BLAZER1500)

LIGHT SOURCE

- 1728x1W White 6500K led
- LED lifespan: > 50.000h

OPTIC SYSTEM

- Beam Angle: 110°

EFFECTS

- Linear dimmer 0-100%
- Adjustable strobe effect
- Random strobe effect
- 48 sectors control

CONTROL AND PROGRAMMING

- Dynamic Patterns with direction and speed controll
- Effect generator with foreground/background, index, speed and direction controll
- Automatic mode with 18 automatic programs selectable with speed control
- 7 DMX configurations available: 1/2/3/4/7/48/55 channels
- Protocol USITT DMX 512
- Master/Slave mode

STRUCTURE AND CABINET

- Die cast aluminium housing
- Color graphic LCD display
- Front tempered glass
- Mounting points: double adjustable bracket
- XLR 3-poles DMX IN/OUT connection IP65
- IP rating: IP65
- Forced air fan cooling system


POWER SUPPLY

- Input Voltage: AC~100-240V, 50/60 Hz
- Switching power supply unit
- Max power: 1800W @ 230VAC
- Power supply cable included

WEIGHT AND DIMENSIONS

- Net weight: 12,5 kg
- Dimensions: 465x254x176 mm

NEW

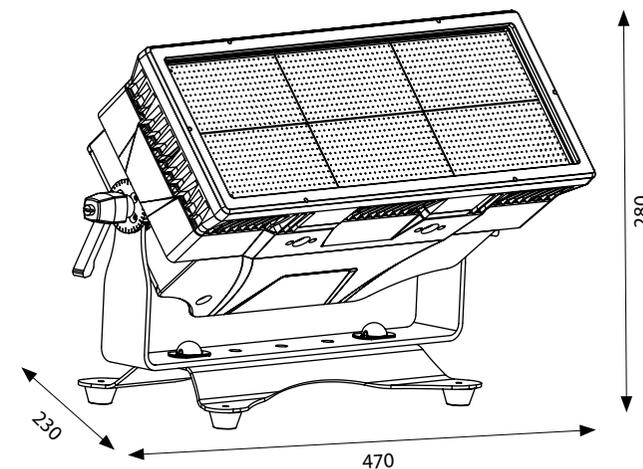



LED
PROJECTORS



SG AQUAPAR7 - PRODUCT CODE
SG CASEAQUAPAR - CASE (6x SG AQUAPAR)

LIGHT SOURCE

- 7x12W RGBWA-UV led
- LED lifespan: >50.000h
- LED refresh frequency: >400Hz flicker free

OPTIC SYSTEM

- Beam angle: 25°

COLOR SYSTEM

- RGBWA-UV full color mixing
- Infinite chromatic possibilities and color temperature control

EFFECTS

- Linear Dimmer 0-100%
- Electronic strobe: 1-20 flashes/s with adjustable speed
- Color macros selectable via DMX

CONTROL AND PROGRAMMING

- 4 DMX configurations available: 3/6/8/13 channels
- Key lock password for display lock
- Master / Slave mode
- Automatic mode with 21 different programs selectable from the display with independent adjustment of the speed and strobe
- Color mode with independent adjustment of single color with 70 different selections
- 11 white balance selections
- 4 dimmer curves

STRUCTURE AND CABINET


- Die cast aluminum housing, black color
- Color LCD display
- Front tempered glass
- Mounting points: double bracket for suspension or floor support
- IP rating: IP65
- 3-poles XLR in/out DMX connection IP65
- Convection cooling system without fans

POWER SUPPLY

- Input Voltage: AC~100-240V, 50/60 Hz
- Switching power supply unit
- Max power: 85W @ 230VAC
- Power IN/OUT connection IP65

WEIGHT AND DIMENSIONS

- Net weight: 3,2 kg
- Dimensions: 250x175x230 mm

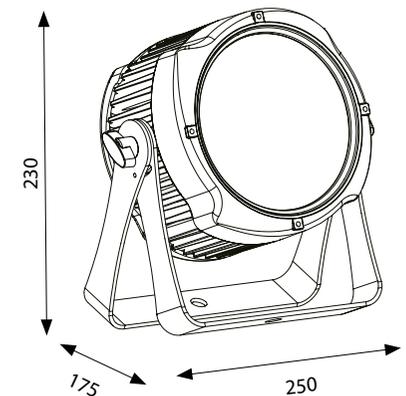

SG AQUPAR12 - PRODUCT CODE
SG CASEAQUPAR - CASE (6x SG AQUPAR)



LIGHT SOURCE

- 12x12W RGBWA-UV led
- LED lifespan: >50,000h
- LED refresh frequency: >400Hz flicker free

OPTIC SYSTEM

- Beam angle: 25°

COLOR SYSTEM

- RGBWA-UV full color mixing
- Infinite chromatic possibilities and color temperature control

EFFECTS

- Linear Dimmer 0-100%
- Electronic strobe: 1-20 flashes/s with adjustable speed
- Color macros selectable via DMX

CONTROL AND PROGRAMMING

- 4 DMX configurations available: 3/6/8/13 channels
- Key lock password for display lock
- Master / Slave mode
- Automatic mode with 21 different programs selectable from the display with independent adjustment of the speed and strobe
- Color mode with independent adjustment of single color with 70 different selections
- 11 white balance selections
- 4 dimmer curves

STRUCTURE AND CABINET


- Die cast aluminum housing, black color
- Color LCD display
- Front tempered glass
- Mounting points: double bracket for suspension or floor support
- IP rating: IP65
- 3-poles XLR in/out DMX connection IP65
- Convection cooling system without fans

POWER SUPPLY

- Input Voltage: AC~100-240V, 50/60 Hz
- Switching power supply unit
- Max power: 145W @ 230VAC
- Power IN/OUT connection IP65

WEIGHT AND DIMENSIONS

- Net weight: 4,8 kg
- Dimensions: 300x215x290 mm

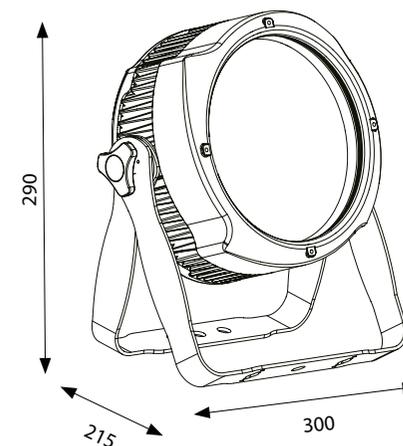



SG AQUAPAR18 - PRODUCT CODE
SG CASEAQUAPAR - CASE (6x SG AQUAPAR)

LIGHT SOURCE

- 18x10W RGBW led
- LED lifespan: >50.000h
- LED refresh frequency: >400Hz flicker free

OPTIC SYSTEM

- Beam angle: 25°

COLOR SYSTEM

- RGBW full color mixing
- Infinite chromatic possibilities and color temperature control

EFFECTS

- Linear Dimmer 0-100%
- Electronic strobe: 1-20 flashes/s with adjustable speed
- Color macros selectable via DMX

CONTROL AND PROGRAMMING

- 4 DMX configurations available: 3/4/6/11 channels
- Key lock password for display lock
- Master / Slave mode
- Automatic mode with 21 different programs selectable from the display with independent adjustment of the speed and strobe
- Color mode with independent adjustment of single color with 70 different selections
- 11 white balance selections
- 4 dimmer curves

STRUCTURE AND CABINET


- Die cast aluminum housing, black color
- Color LCD display
- Front tempered glass
- Mounting points: double bracket for suspension or floor support
- IP rating: IP65
- 3-poles XLR in/out DMX connection IP65
- Convection cooling system without fans

POWER SUPPLY

- Input Voltage: AC~100-240V, 50/60 Hz
- Switching power supply unit
- Max power: 185W @ 230VAC
- Power IN/OUT connection IP65

WEIGHT AND DIMENSIONS

- Net weight: 4,8 kg
- Dimensions: 300x215x290 mm

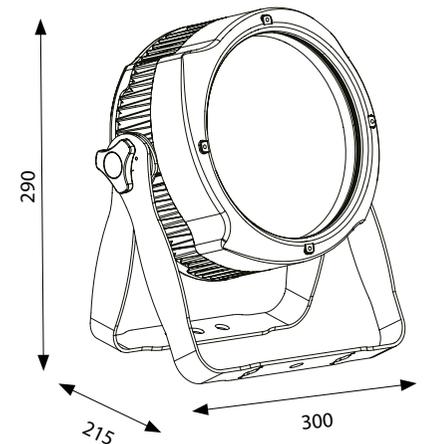

COB PROJECTORS





SG SOLPARC60Z - PRODUCT CODE
SG CASESOLPAR60 - CASE (6x SG SOLPARC60)

LIGHT SOURCE

- 1x60W RGBW COB led
- LED lifespan: >50.000h
- LED refresh frequency: >400Hz flicker-free

OPTIC SYSTEM

- Beam angle: motorized zoom from 15° to 40°

COLOR SYSTEM

- RGBW full color mixing
- Infinite chromatic possibilities

EFFECTS

- Linear dimmer 0-100%
- Adjustable strobe
- Color Macros selectable from DMX

CONTROL AND PROGRAMMING

- 4 DMX configuration available: 3/5/7/9 channels
- Key password for display settings lock
- Protocol USITT DMX 512
- Master/Slave mode
- Macro mode with 63 built-in programs selectable from the display
- Play/Edit User Mode with the possibility to run and edit 20 timed programs
- 5 dimmer curves

STRUCTURE AND CABINET


- Die cast aluminum housing
- Blue LCD graphic display
- Soft touch buttons
- Tempered front glass
- "light up" positioning without brackets
- IP65 protection grade
- IP65 3/5 poles XLR in/out dmx signal connections
- Convection cooling system without fans
- Optional barndoor (code:SG SOLPARC60BN)

POWER SUPPLY

- Input Voltage: AC~100-240V, 50/60 Hz
- Switching power supply unit
- Max power: 78W @ 230VAC
- IP65 Powercon True ONE in/out power connections
- Power supply cable included

WEIGHT AND DIMENSIONS

- Net weight: 5,5 kg
- Dimensions: 280x300x280 mm

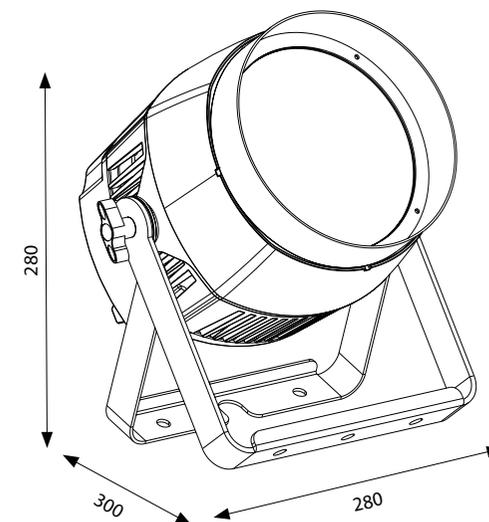

SG SOLPARC150Z - PRODUCT CODE
SG CASESOLPAR150 - CASE (6x SG SOLPARC150)

LIGHT SOURCE

- 1x120W RGBW COB led
- LED lifespan: >50.000h
- LED refresh frequency: >400Hz flicker-free

OPTIC SYSTEM

- Beam angle: motorized zoom from 15° to 40°

COLOR SYSTEM

- RGBW full color mixing
- Infinite chromatic possibilities

EFFECTS

- Linear dimmer 0-100%
- Adjustable strobe
- Color Macros selectable from DMX

CONTROL AND PROGRAMMING

- 4 DMX configuration available: 3/5/7/9 channels
- Key password for display settings lock
- Protocol USITT DMX 512
- Master/Slave mode
- Macro mode with 63 built-in programs selectable from the display
- Play/Edit User Mode with the possibility to run and edit 20 timed programs
- 5 dimmer curves

STRUCTURE AND CABINET


- Die cast aluminum housing
- Blue LCD graphic display
- Soft touch buttons
- Tempered front glass
- "light up" positioning without brackets
- IP65 protection grade
- IP65 3/5 poles XLR in-out dmx signal connections
- Convection cooling system without fans
- Optional barndoor (code:SG SOLPARC150BN)

POWER SUPPLY


- Input Voltage: AC~100-240V, 50/60 Hz
- Switching power supply unit
- Max power: 135W @ 230VAC
- IP65 Powercon True ONE in/out power connections
- Power supply cable included

WEIGHT AND DIMENSIONS

- Net weight: 9,2 kg
- Dimensions: 355x330x330 mm

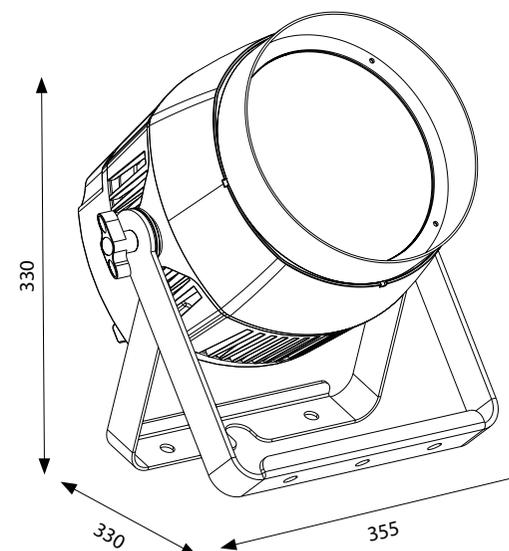

LED BATTERY PROJECTORS

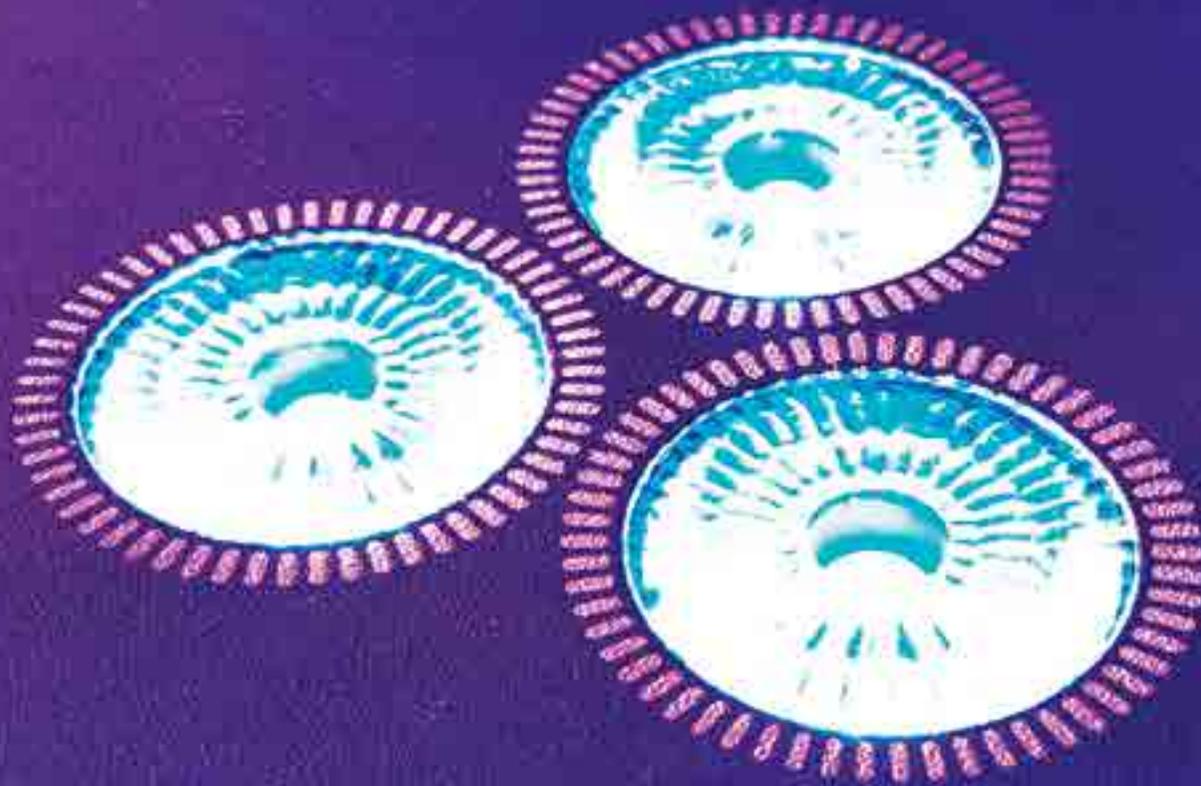

SG FLBATQ3 - PRODUCT CODE
SG FLBATCHBOX - CHARGER BOX



LIGHT SOURCE

- 3x12W led RGBWA - UV full color led
- LED lifespan: > 50.000h
- LED refresh frequency: > 400Hz flicker-free

OPTIC SYSTEM

- Beam Angle: 15°

COLOR SYSTEM

- RGBWA-UV full color mixing
- Infinite chromatic possibilities

EFFECTS

- Linear dimmer 0-100%
- Adjustable strobe effect
- Static color mode: manual adjustment for each color
- Manual color mode: static built-in color macros
- Auto mode: built-in automatic programs with adjustable speed
- Sound mode: sound activation with internal microphone with adjustable sensitivity
- 3 dimmer curves

CONTROL AND PROGRAMMING

- 3 DMX configurations available: 6/8/12 channels
- Protocol USITT DMX 512
- Built-in DMX wireless transceiver by Wireless Solutions
- Master/Slave mode
- Auto mode
- IR remote controller included with possibility to recall colors or macros

STRUCTURE AND CABINET


- Metal housing
- OLED display
- Touch button for selection
- "Light up" positioning with adjustable angle
- IP rating: IP20
- Convection cooling system without fans

POWER SUPPLY

- Power supply: 12,8Vdc, 1,4A
- Rechargeable internal Lithium battery
- Runtime battery: ~ 4 hrs (full ON)
- Max power: 36W

WEIGHT AND DIMENSIONS

- Net weight: 1,6 kg
- Dimensions: 145x145x65 mm

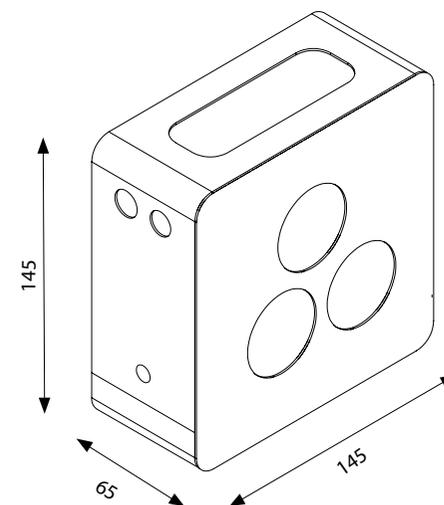



SG FLBATQ1 - PRODUCT CODE
SG FLBATCBOX - CHARGER BOX

LIGHT SOURCE

- 1x15W RGBW full color led
- LED lifespan: > 50.000h
- LED refresh frequency: > 400Hz flicker-free

OPTIC SYSTEM

- Beam Angle: 15°

COLOR SYSTEM

- RGBW full color mixing
- Infinite chromatic possibilities

EFFECTS

- Linear dimmer 0-100%
- Adjustable strobe effect
- Static color mode: manual adjustment for each color
- Manual color mode: static built-in color macros
- Auto mode: built-in automatic programs with adjustable speed
- Sound mode: sound activation with internal microphone with adjustable sensitivity
- 3 dimmer curves

CONTROL AND PROGRAMMING

- 3 DMX configurations available: 4/6/11 channels
- Protocol USITT DMX 512
- Built-in DMX wireless transceiver by Wireless Solutions
- Master/Slave mode
- Auto mode
- IR remote controller included with possibility to recall colors or macros

STRUCTURE AND CABINET


- Metal housing
- OLED display
- Touch button for selection
- "Light up" positioning with adjustable angle
- IP rating: IP20
- Convection cooling system without fans

POWER SUPPLY

- Power supply: 12,8Vdc, 1,4A
- Rechargeable internal Lithium battery
- Runtime battery: ~ 5 hrs (full ON)
- Max power: 15W

WEIGHT AND DIMENSIONS

- Net weight: 1,6 kg
- Dimensions: 145x145x65 mm

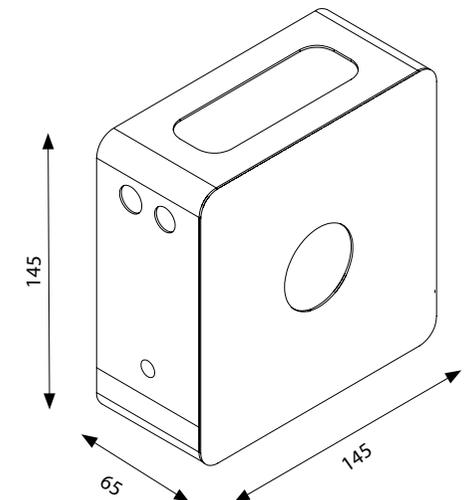

SG AIRBOX - PRODUCT CODE**TECHNICAL DATA**


- DMX Wireless Transmitter/Receiver by Wireless Solution for FLOORBAT Serie
- Number of channels: 512
- Operational mode: Transmitter/Receiver
- Operational Frequency: 2.4 GHZ
- Up to 250m range working distance
- Interference free
- Protocol Standard: USITT Dmx 512/1990
- Data connection: dmx in/out through 3 poles connectors
- Modulation method: GFSK
- Adaptive Frequency Hopping
- Error correction

POWER SUPPLY

- Input voltage: 5 Vdc


WEIGHT AND DIMENSIONS

- Weight: 0,39 Kg
- Dimensions: 135x140x34 mm

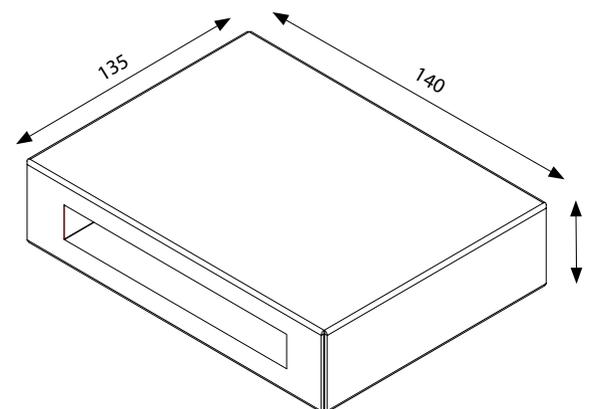**NEW**

CONTROLLERS



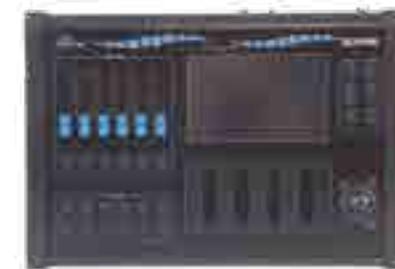

SG QUIVER - PRODUCT CODE

SG CASEQUIVER - CASE (1X SG QUIVER)

SG CASEQUIVER1X - CASE (1X SG QUIVER + 1X SG QUIVERX)

SG CASEQUIVER2X - CASE (1X SG QUIVER + 2X SG QUIVERX)

SG QUIVERWI - WIRELESS TRANSMITTER DMX WIDMX

SG QUIVERWI2 - WIRELESS TRANSMITTER DMX WSOOLUTION

CONTROLS

- Colour Display touch-screen TFT LCD 7"
- 6 control keys for editor
- 6 configurable slider as playback, master group
- 6 configurable key as play, flash, DBO
- 12 keys for direct access to playback and CUES
- 4 touch-fader for the control of the attributes during the programming and control of the effects and during playback and manual use
- Joystick for PAN and TILT movement control with lock and fine/super fine keys

DESCRIPTION

- Effective graphic interface able to easily manage programming and playback for a maximum of 144 cue-list organize in 12 pages each having a maximum of 999 cues
- 512 channel for each single universe DMX for the control of dimmer and/or intelligent projector, available simultaneously on XLR connector 3 poles
- Up to 1536 channel with Quiver Expand
- Up to 36 Cue-list run concurrently (with 2 Expand connected)
- "Shape engine" customizable and applicable to different functions

(PAN&TILT - DIM - COLOR - GOBO - BLADE)


- Up to 6 different families of "palettes" programmable for a flexible and easy control of intelligent projectors
- Up to 999 Cues for each playback
- Library "personalities" upgradeable, creating fixture via software for PC (included)
- "Palettes" Chris/Gam/Lee and Rosco pre-program usable on all machines with mixing colors RGB or CMY
- Maximum Number of storable cues to show: 999
- RDM ready (Prepared for enlargement of technology)
- Wireless ready (Designed for the insertion of a wireless transmitter sold separately)
- External Power Supply: 100-240V 50-60Hz
- USB Pendrive (included)
- USB Gooseneck led light (included)
- Protective cover (included)

CONNECTIONS

- DMX out: 1x XLR 3 poles
- Expand: 2x RJ45 for expansions connection
- USB 1x port for backup, lamp power supply and update the fixture
- Jack 6,3mm for connecting the pedals for controlling the gearbox scenes


WEIGHT AND DIMENSIONS:

- Net weight: 3,4 kg
- DIMENSIONS: 420X98X288 mm

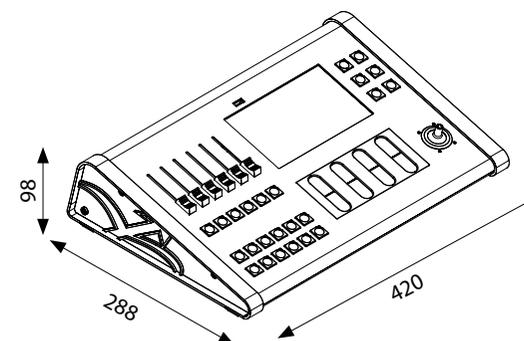



EXAMPLE OF CASE

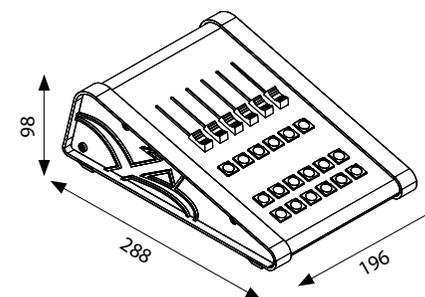

SG QUIVERX - PRODUCT CODE

CONTROLS

- 6 configurable slider as playback, master group
- 6 configurable key as play, flash, DBO
- 12 keys for direct access to playback and CUES

CONNECTIONS

- DMX out: 1x XLR 3 poles
- Expand: 1x RJ45 for expansions connection to Quiver

WEIGHT AND DIMENSIONS:

- Net weight: 1,4 kg
- Dimensions: 196x98x288 mm


QUIVER + 1 QUIVER X



QUIVER + 2 QUIVER X



AMBIENT EFFECTS

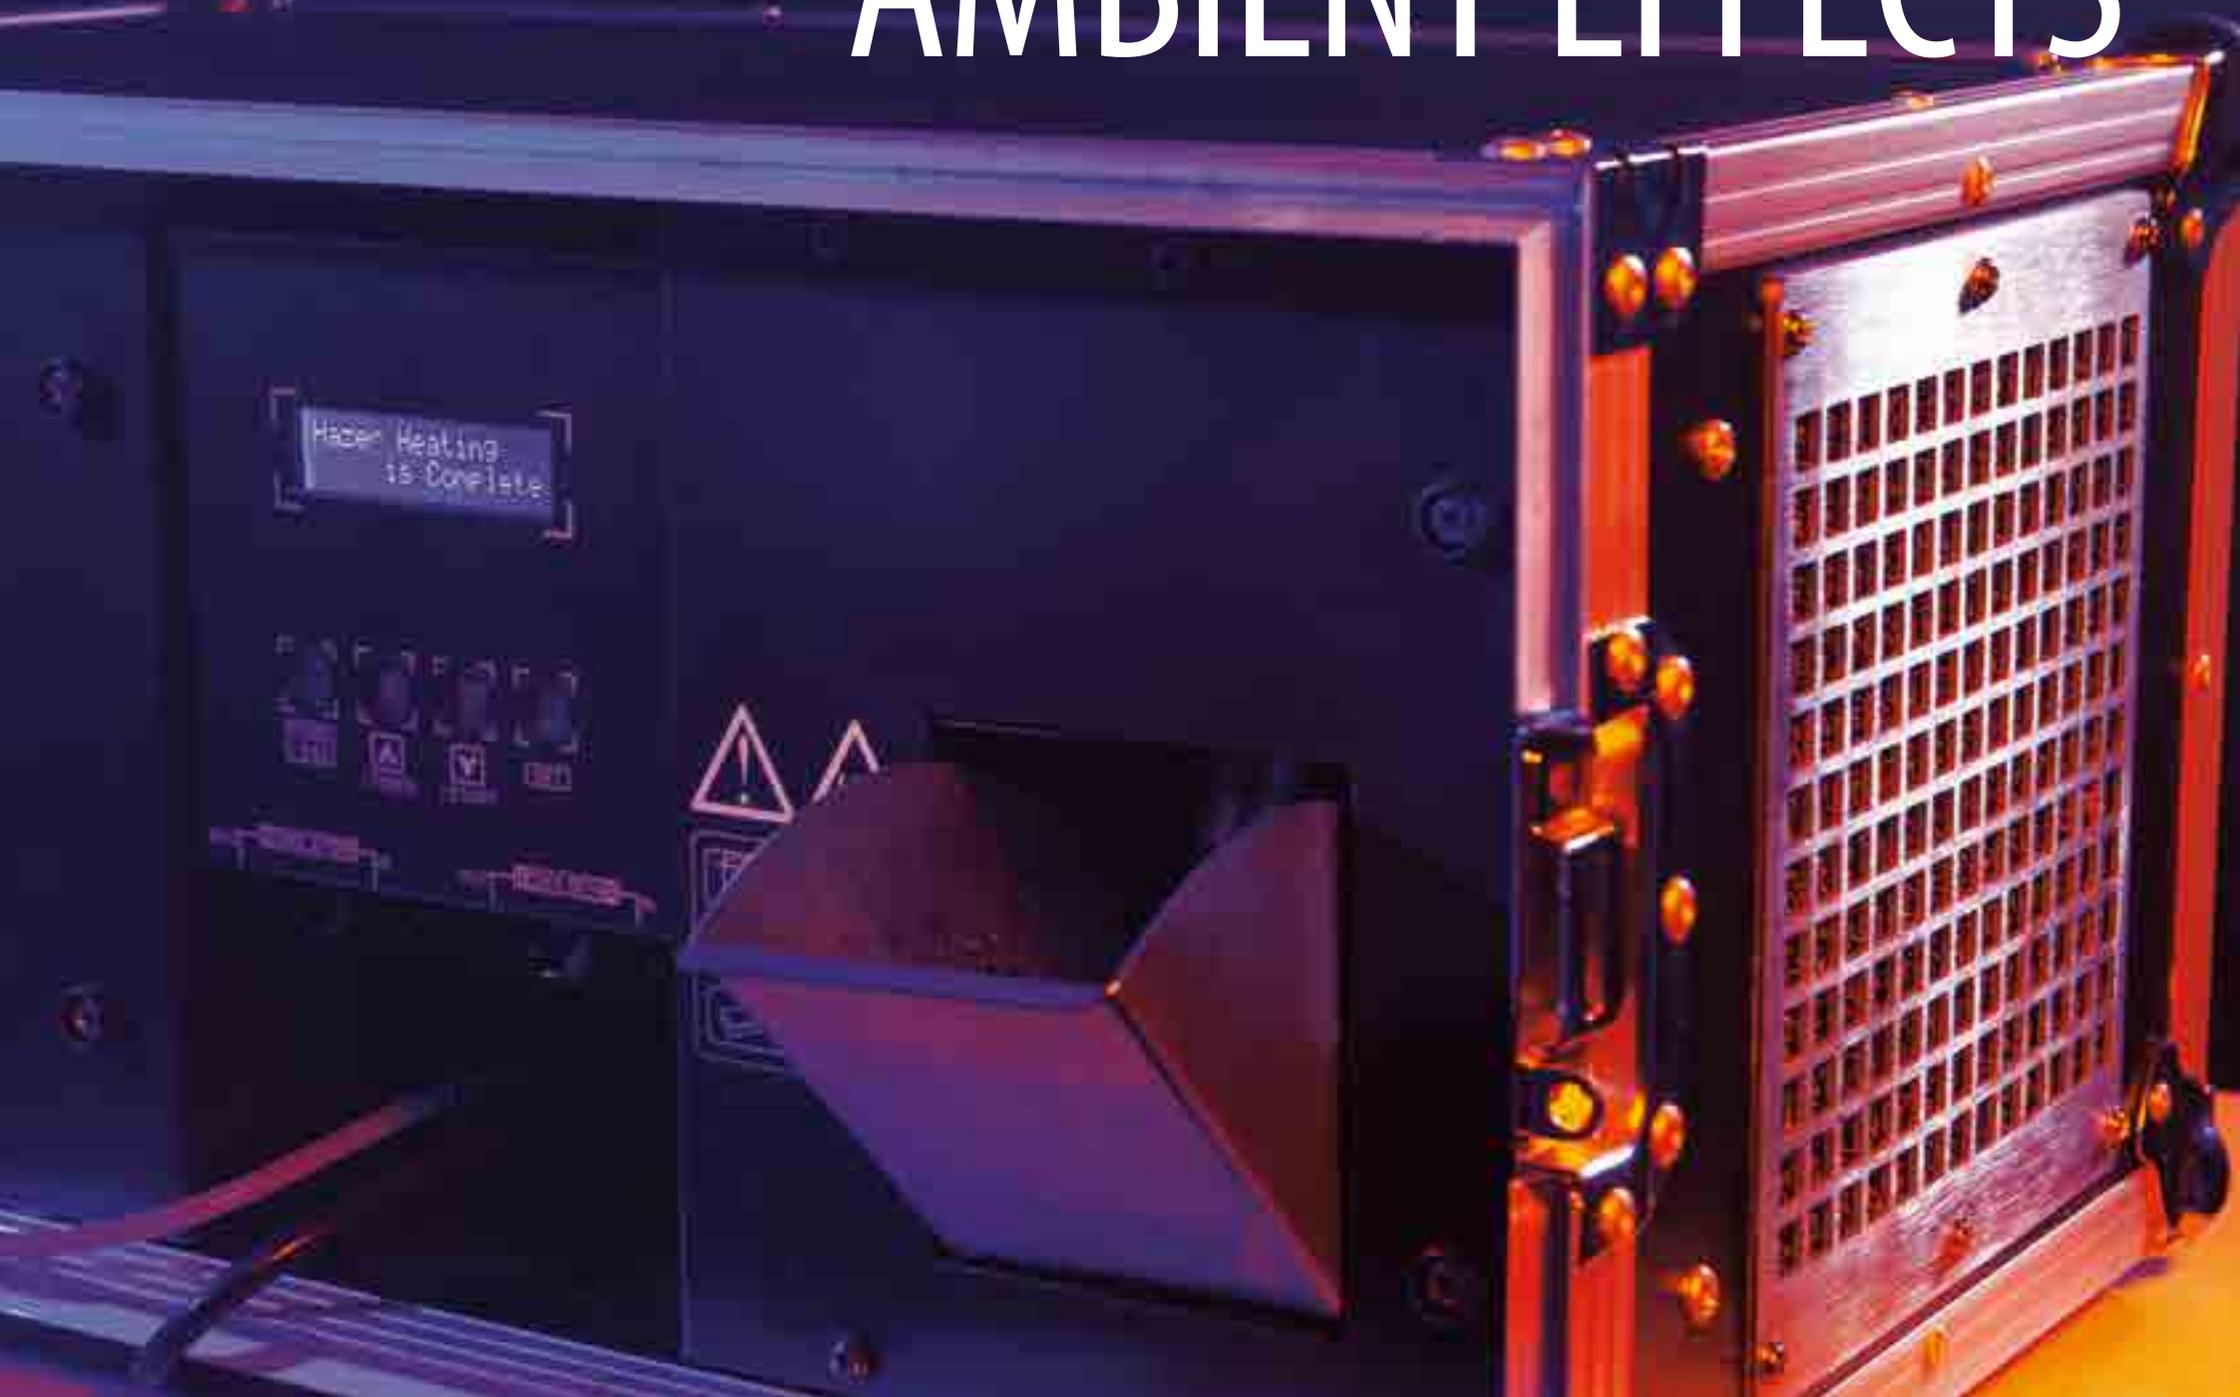

AMBIENT EFFECT HAZER 1500



SG H1500 - PRODUCT CODE

EFFECTS

- Hazer effect

CONTROL AND PROGRAMMING

- 2 different DMX channels configurations
- Fan's speed adjustable via software and via DMX
- Protocol USITT DMX 512
- Automatic safety shutdown circuit for pump prevention in case of finished liquid in the circuit
- Heating time: 4 mins
- Smoke output: 1700cuft
- Continue output
- Manual mode adjustable via display

STRUCTURE AND CABINET


- Metal black housing
- LCD blue graphic display
- Flight case included, for easy transportation
- Comfortable handle for transportation
- High performance pump for optimal emission
- High speed axial fan
- External tank: 6 litres
- 3/5 poles XLR in/out connection
- IP rating: IP20
- For best applications and correct function we recommend using Sagitter fluids

POWER SUPPLY

- Input Voltage: AC~230V 50Hz
- Max power: 1500W @ 230VAC
- IN power connection with powerCON sockets
- Power supply cable 1,5 mt included

WEIGHT AND DIMENSIONS:

- Net weight: 18 kg
- Dimensions:: 570x415x270 mm

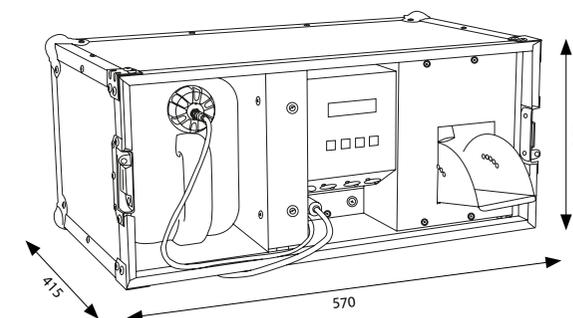

DARKNESS CANNOT DRIVE OUT DARKNESS
ONLY LIGHT CAN DO THAT

(Martin Luther King)









LED MOVING HEADS



SG SMTWHPLUS - PRODUCT CODE

LIGHT SOURCE

- 7x12W led RGBWA Full Color
- LED lifespan: > 50.000h

OPTIC SYSTEM

- Beam Angle: 25°

COLOR SYSTEM

- Led Source 5 in 1 RGBWA Full Color
- Infinite chromatic possibilities

EFFECTS

- Linear dimmer 0-100%
- Adjustable strobe effect
- Color macro selectable from DMX

CONTROL AND PROGRAMMING

- 2 DMX configurations available: 5/14 channels
- Protocol USITT DMX 512
- Master/Slave mode
- Sound mode with adjustable microphone sensitivity
- Auto mode

STRUCTURE AND CABINET



- Black metal housing and high resistance plastic materials
- Red LED display
- Pan angle 540°
- Tilt angle 180°
- Mounting points: 1 omega holder + "safety ring"
- XLR 3-poles DMX IN/OUT connection
- IP rating: IP20
- Forced air cooling system

POWER SUPPLY

- Input Voltage: AC~100-240V, 50/60 Hz
- Switching power supply unit
- Max power: 100W @ 230VAC
- Power supply cable 1mt included

WEIGHT AND DIMENSIONS

- Net weight: 3,5 kg
- Dimensions: 175x175x250 mm

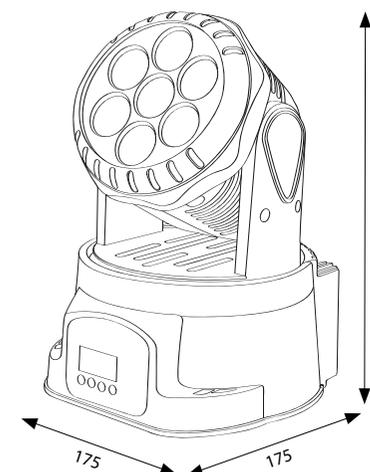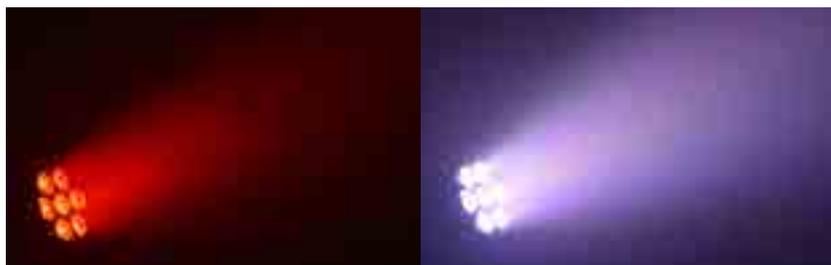

LED MOVING HEADS
SMART WASH PLUS



LED MOVING HEADS SMART SPOT PLUS



SG SMTSPOTPLUS - PRODUCT CODE

LIGHT SOURCE

- 1x60W white LED high brightness
- LED Color temperature: 5600K
- LED lifespan: >50.000h

OPTIC SYSTEM

- Beam angle: 13°
- Manual focus

COLOR SYSTEM

- Color wheel: 7 colors + white

EFFECTS

- Gobo wheel: 7 fixed gobos that can be combined with color wheel
- Gobo shake
- Gobo scroll in both directions
- Color rainbow effect in both directions with adjustable speed
- Linear dimmer 0-100%
- Electronic high speed strobe from 1 to 20 flashes/s, adjustable speed
- Color and Pan&Tilt macros selectable from DMX

CONTROL AND PROGRAMMING

- 3 different DMX channels configurations: 5/9/11 channels
- Protocol USITT DMX 512
- Pan&Tilt 8/16 bit selectable resolution
- Master/Slave mode
- Sound mode with adjustable sensitivity of microphone
- Reset via DMX

STRUCTURE AND CABINET


- Black metal housing and plastic materials with high resistance
- Blue LED display
- Pan 540° / Tilt 230°
- Mounting points: 1 omega holder
- 3-poles XLR in/out connection
- IP Rating: IP 20
- Forced air fan cooling system

POWER SUPPLY

- Input Voltage: AC~100-240V 50/60Hz
- Switching power supply unit
- Max power: 70W @ 230VAC
- Power connection with VDE sockets
- Power supply cable 1,5 mt included

WEIGHT AND DIMENSIONS

- Net weight: 3,0 kg
- Dimensions: 205x145x275 mm

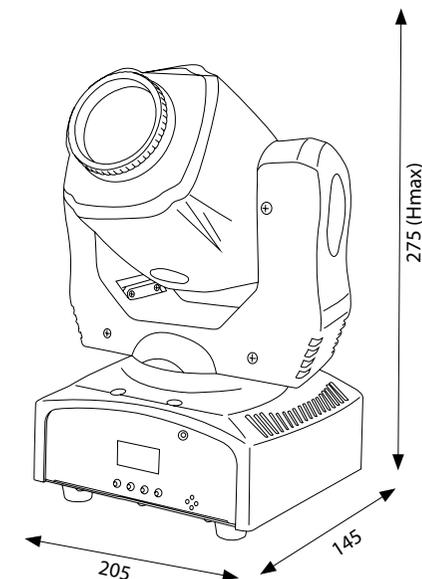



**SG CLSPOT100 - PRODUCT CODE
SG CASECLUB**

LIGHT SOURCE

- 1x100W white led high brightness
- Color temperature 5600K
- LED lifespan: >50.000h
- LED Refresh frequency: >400Hz flicker-free

OPTIC SYSTEM

- Beam angle: 9,4°
- Electronic focus
- Luminous flux: 3600 lux @5mt (9.4°)

COLOR SYSTEM

- Color wheel with 7 colors + white

EFFECTS

- 7 dichroic rotating gobos, the gobos are interchangeable with the "plug & play" system. Gobo size 21,8mm / focus 14,5mm
- Bidirectional gobo scroll with adjustable speed
- Gobo shake effect
- Gobo Scroll with variable speed
- 3-facet rotating prism with adjustable speed in both directions
- Color rainbow effect in both directions
- Linear dimmer 0 - 100%
- High speed electronic strobe max.25 flashes/s, with adjustable speed
- Random strobe and pulse dimmer effects with adjustable speed

CONTROL AND PROGRAMMING

- 2 DMX configurations available: 11/13 channels
- Protocol USITT DMX 512
- Pan&Tilt 8/16 bit selectable resolution
- Master / Slave mode
- Sound mode with adjustable microphone sensitivity
- Auto mode with 7 internal programs selectable from display
- Reset via DMX

STRUCTURE AND CABINET


- Black aluminium/metal housing and plastic materials with high resistance
- Red LED display
- 3 different Pan&Tilt angle presets: PAN 360°-540°-630°, TILT 90°-180°-270°
- Mounting points: one 1/4-turn lock omega holder
- Automatic repositioning of PAN and TILT after accidental movement
- 3-poles XLR in/out connection
- IP Rating: IP 20
- Forced air fan cooling system with electronic control

POWER SUPPLY

- Input Voltage: AC~100-240V 50/60Hz
- Switching power supply unit
- Max power: 120W @ 230VAC
- IN power connection with powerCON sockets
- Power supply cable 1,5 mt included

WEIGHT AND DIMENSIONS

- Net weight: 6,8 kg
- Dimensions: 270x149x366 mm

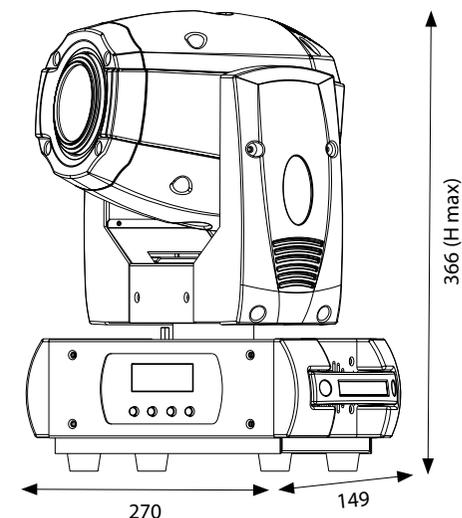



LED MOVING HEADS CLUB BEAM 100



SG CLBEAM100 - PRODUCT CODE SG CASECLUB

LIGHT SOURCE

- 1x100W white led high brightness
- Color temperature 5600K
- LED lifespan: >50.000h
- LED Refresh frequency: >400Hz flicker-free

OPTIC SYSTEM

- Beam angle: 2°
- Electronic focus
- Luminous flux: 21300 lux @5mt (2°)

COLOR SYSTEM

- Color wheel with 14 colors + white

EFFECTS

- Gobo wheel: 17 fixed gobos
- Bidirectional gobo scroll with adjustable speed
- 8-facet rotating prism with adjustable speed
- Color rainbow effect in both directions
- Linear dimmer 0 - 100%
- High speed electronic strobe max.25 flashes/s, adjustable speed
- Random strobe and pulse dimmer effects with adjustable speed

CONTROL AND PROGRAMMING

- 2 DMX configurations available: 10/12 channels
- Protocol USITT DMX 512
- Pan&Tilt 8/16 bit selectable resolution
- Master / Slave mode
- Sound mode with adjustable microphone sensitivity
- Auto mode with 7 internal programs selectable from display
- Reset via DMX



STRUCTURE AND CABINET


- Black aluminium/metal housing and plastic materials with high resistance
- Red LED display
- 3 different Pan&Tilt angle presets: PAN 360°-540°-630°, TILT 90°-180°-270°
- Mounting points: 1 omega holder
- Automatic repositioning of PAN and TILT after accidental movement not controlled by control unit
- 3-poles XLR in/out connection
- IP Rating: IP 20
- Forced air fan cooling system with electronic control

POWER SUPPLY

- Input Voltage: AC~100-240V 50/60Hz
- Switching power supply unit
- Max power: 120W @ 230VAC
- IN power connection with powerCON sockets
- Power supply cable 1,5 mt included

WEIGHT AND DIMENSIONS

- Net weight: 7,3 kg
- Dimensions: 270x149x364 mm

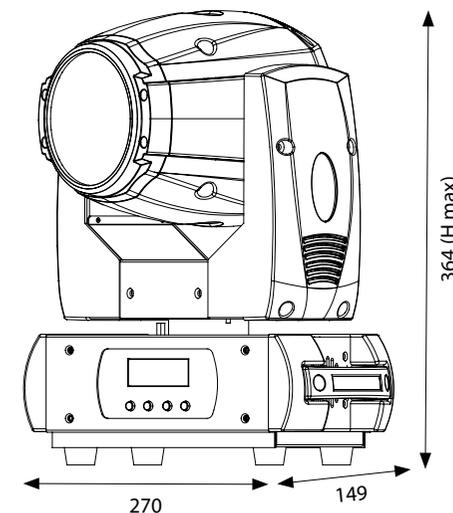



SG CLDOTZ - PRODUCT CODE
SG CASEDOTZ - CASE (4x SG CLDOTZ)

LIGHT SOURCE

- 1x60W led RGBW Full Color
- LED lifespan: > 50.000h
- LED refresh frequency: > 400Hz flicker-free

OPTIC SYSTEM

- Beam Angle: 2,5° – 35°

COLOR SYSTEM

- LED source RGBW Full color
- Infinite chromatic possibilities

EFFECTS

- Linear dimmer 0-100%
- High speed electronic strobe max.25 flashes/s, with adjustable speed
- Random strobe and pulse dimmer effects with adjustable speed
- Color macros selectable via DMX
- Kaleidoscope and Flower effect
- 8-facet rotating prism with adjustable speed
- Secondary LED rotating prism for flower effect, with adjustable speed
- Frost filter

CONTROL AND PROGRAMMING

- 2 different DMX channels configurations: 14/16 channels
- Protocol USITT DMX 512
- Master/Slave mode
- Sound mode with adjustable microphone sensitivity
- Auto mode
- Reset via DMX

STRUCTURE AND CABINET

- Black metal housing and high resistance plastic materials
- Blue LCD graphic display
- Infinite high precision Pan with adjustable speed
- Infinite high precision Tilt with adjustable speed
- Automatic repositioning of Pan and Tilt after accidental movements
- XLR 3-poles DMX IN/OUT connection
- IP rating: IP20
- Forced air cooling system with electronic control

POWER SUPPLY


- Input Voltage: AC~100-240V, 50/60 Hz
- Switching power supply unit
- Max power: 145W @ 230VAC
- Power input with IN/OUT PowerCON connector
- Power supply cable 1mt included

WEIGHT AND DIMENSIONS

- Net weight: 8,3 kg
- Dimensions: 280x155x420 mm



LED MOVING HEADS
CLUB DOT ZOOM

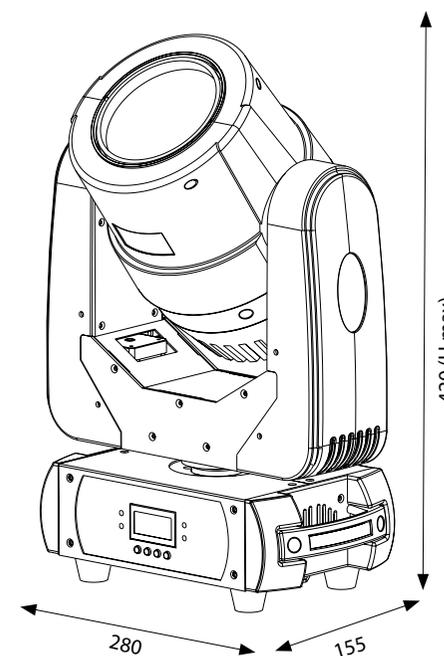



LED MOVING HEADS CLUB WASH



SG CLWASH - PRODUCT CODE
SG CLWASHKIT - KIT (2x SG CLWASH + 1 SG CASESCLWASH)
SG CASESCLWASH - CASE (4x SG CLWASH)

LIGHT SOURCE

- 36x10W led RGBW Full Color
- LED lifespan: > 50,000h
- LED refresh frequency: > 400Hz flicker-free

OPTIC SYSTEM

- Beam Angle: zoom from 8° to 50°
- Luminous flux: 1.130 lux @ 5mt (8°)

COLOR SYSTEM

- LED source RGBW Full color
- Infinite chromatic possibilities

EFFECTS

- Linear dimmer 0-100%
- Electronic high speed strobe from 1 to 25 flashes/s, with adjustable speed.
- Random strobe and pulse effect with adjustable speed
- Color macros selectable via DMX

CONTROL AND PROGRAMMING

- 1 DMX configurations available: 14 channels
- Protocol USITT DMX 512
- Master/Slave mode
- Sound mode with adjustable microphone sensitivity
- Auto mode
- Reset via DMX

STRUCTURE AND CABINET


- Black metal housing and high resistance plastic materials
- Blue LCD graphic display
- Pan angle: 540°
- Tilt angle: 250°
- Mounting points: 1 pair of 1/4-turn lock omega holders
- Automatic repositioning of Pan and Tilt after accidental movements
- XLR 3-poles DMX IN/OUT connection
- IP rating: IP20
- Forced air cooling system with electronic control

POWER SUPPLY

- Input Voltage: AC~100-240V, 50/60 Hz
- Switching power supply unit
- Max power: 370W @ 230VAC
- Power input with PowerCON connector
- Power supply cable 1mt included

WEIGHT AND DIMENSIONS

- Net weight: 9,8 kg
- Dimensions: 335x235x442 mm

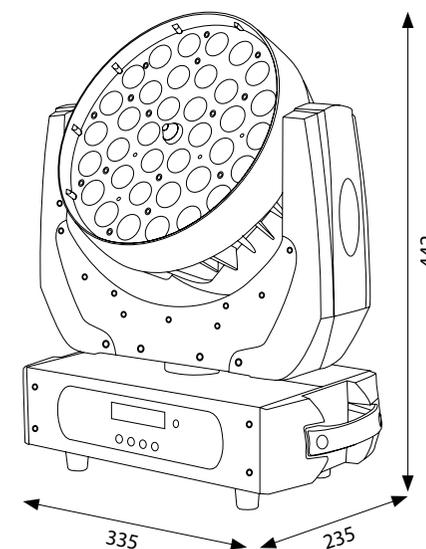


LED BEAM EFFECTS





LED BEAM EFFECTS B-RAY 8 PLUS

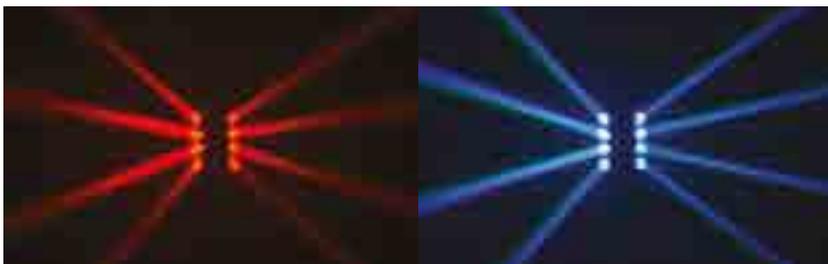

SG BRAY8P - PRODUCT CODE

LIGHT SOURCE

- 8x10W led RGBW
- LED lifespan: >50.000h

OPTIC SYSTEM

- Beam angle: 4°

COLOR SYSTEM

- LED source RGBW

EFFECTS

- Linear dimmer 0-100%
- Electronic high speed strobe from 1 to 20 flashes/s, with adjustable speed
- Random strobe and pulse effect with adjustable speed
- Single pixel control
- Color Tilt and Pixel macros selectable from DMX

CONTROL AND PROGRAMMING

- 3 different DMX channels configurations: 3/10/38 channels
- Protocol USITT DMX 512
- Master/Slave mode selectable
- Sound mode with adjustable microphone sensitivity
- Auto mode: 35 different programs can be recalled by display
- Reset via DMX

STRUCTURE AND CABINET


- Black metal Housing, and plastic materials with high resistance
- Blue LED display
- Mounting points: 1 pair of 1/4-turn lock omega holder
- Double independent tilt movement with 145° rotation
- 3-poles XLR in/out connection
- IP Rating: IP 20
- Forced air fan cooling system

POWER SUPPLY

- Input Voltage: AC~100-240V 50/60Hz
- Switching power supply unit
- Max power: 100W @ 230VAC
- IN / OUT power connection with VDE sockets
- Power supply cable 1,5 mt included
- Max 4 pcs linkable @240V

WEIGHT AND DIMENSIONS

- Net weight: 4,4 kg
- Dimensions: 395x240x155 mm

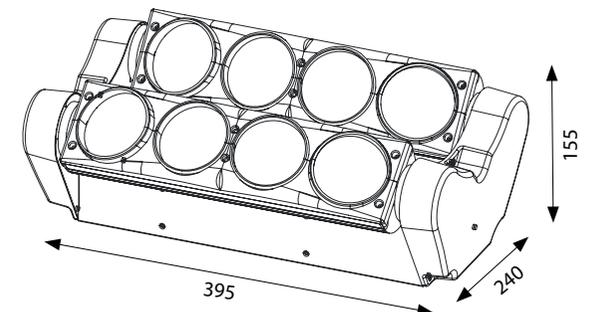



SG BRAY8WP - PRODUCT CODE

LIGHT SOURCE

- 8x8W led Cold White
- LED lifespan: >50,000h

OPTIC SYSTEM

- Beam angle: 4°

COLOR SYSTEM

- LED source Cold White

EFFECTS

- Linear dimmer 0-100%
- Electronic high speed strobe from 1 to 20 flashes/s, with adjustable speed
- Random strobe and pulse effect with adjustable speed
- Single pixel control
- Color Tilt and Pixel macros selectable from DMX

CONTROL AND PROGRAMMING

- 3 different DMX channels configurations: 3/7/14 channels
- Protocol USITT DMX 512
- Master/Slave mode selectable
- Sound mode with adjustable microphone sensitivity
- Auto mode: 10 different programs can be recalled by display
- Reset via DMX

STRUCTURE AND CABINET


- Black metal Housing, and plastic materials with high resistance
- Blue LED display
- Mounting points: 1 pair of ¼-turn lock omega holder
- Double independent tilt movement with 145° rotation
- 3-poles XLR in/out connection
- IP Rating: IP 20
- Forced air fan cooling system

POWER SUPPLY

- Input Voltage: AC~100-240V 50/60Hz
- Switching power supply unit
- Max power: 80W @ 230VAC
- IN / OUT power connection with VDE sockets
- Power supply cable 1,5 mt included
- Max 4 pcs linkable @240V

WEIGHT AND DIMENSIONS

- Net weight: 4,4 kg
- Dimensions: 395x240x155 mm

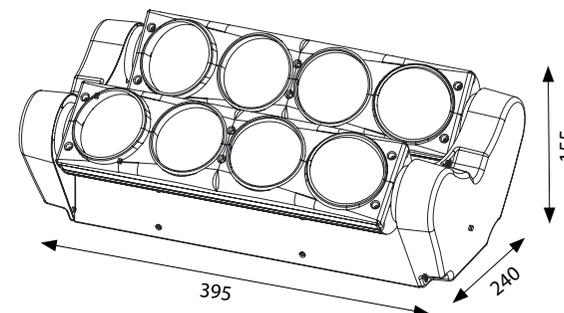

LED MOVING HEADS
B-RAY 8 PLUS WHITE



LED BEAM EFFECTS B-RAY 8 MINI



SG BRAY8M - PRODUCT CODE

LIGHT SOURCE

- 8x3W led RGBW
- LED lifespan: > 50.000h

OPTIC SYSTEM

- Beam Angle: 4°

COLOR SYSTEM

- LED source RGBW (1R - 1G - 1B - 1W)

EFFECTS

- Linear dimmer 0-100%
- Electronic high speed strobe from 1 to 20 flashes/s, with adjustable speed
- Random strobe and pulse effect with adjustable speed
- Color macros selectable via DMX
- Single pixel control

CONTROL AND PROGRAMMING

- 2 DMX configurations available: 10/14 channels
- Protocol USITT DMX 512
- Master/Slave mode
- Sound mode with adjustable microphone sensitivity
- Auto mode

STRUCTURE AND CABINET


- Black metal housing and high resistance plastic materials
- Red LED display
- Mounting points: 1 omega holder
- Double independent tilt movement
- XLR 3-poles DMX IN/OUT connection
- IP rating: IP20

POWER SUPPLY

- Input Voltage: AC~100-240V, 50/60 Hz
- Switching power supply unit
- Max power: 39W @ 230VAC
- Power supply cable 1mt included

WEIGHT AND DIMENSIONS

- Net weight: 2 kg
- Dimensions: 280x150x100 mm

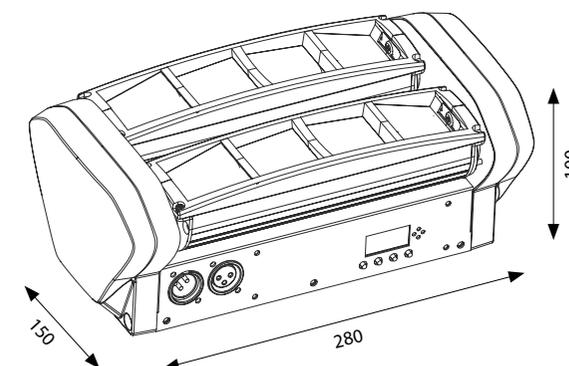

LED PROJECTORS





LED PROJECTORS SLIMPAR 7 DL



SG SLIMPAR7DL - PRODUCT CODE

LIGHT SOURCE

- 7x12W led RGBWU Full Color
- LED lifespan: >50.000h
- LED refresh frequency: >400Hz flicker free

OPTIC SYSTEM

- Beam angle: 25°
- Luminous flux: 2290 lux @3mt (25°)

COLOR SYSTEM

- LED source 6 in 1 RGBWU Full Color
- Infinite chromatic possibilities and colour temperature control
- Color temperature control with Amber color
- "Dark Light" technology LED UV (Ultra Violet)
- 2 color macros can be recalled by DMX

EFFECTS

- Linear Dimmer 0-100%
- Electronic strobe: 1-20 flashes/s with adjustable speed

CONTROL AND PROGRAMMING

- 4 DMX configurations available: 1/6/7/10 channels
- Protocol USITT DMX 512
- Master / Slave mode
- Sound mode with adjustable mic sensitivity
- Static color mode with independent adjustment of strobe
- Automatic mode with 2 different programs selectable from the display with independent adjustment of the speed and strobe
- Color mode with 50 different pre-programmed color macros with independent adjustment of the strobe
- IR remote controller included with possibility to recall colors or macros

STRUCTURE AND CABINET



- ABS housing, black color
- Red LED display
- Mounting points: double adjustable bracket
- "light up" positioning without brackets
- 3-poles XLR in/out connection
- IP rating: IP 20
- Forced air fan cooling system

POWER SUPPLY

- Input Voltage: AC~100-240V 50/60Hz
- Switching power supply unit
- Max power: 100W @ 230VAC
- Power IN/OUT connection with VDE socket
- Power supply cable 1,5 mt included
- Max 6 pcs linkable @240V

WEIGHT AND DIMENSIONS

- Net weight: 2,1 kg
- Dimensions: 257x130x240 mm

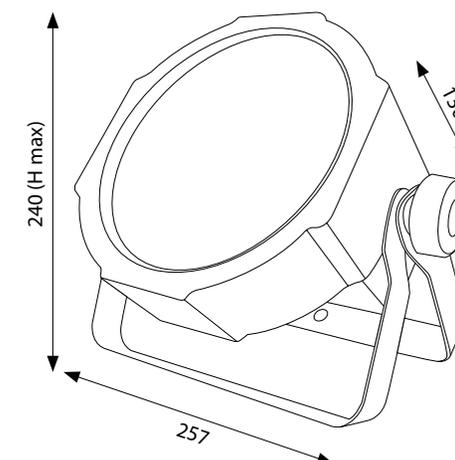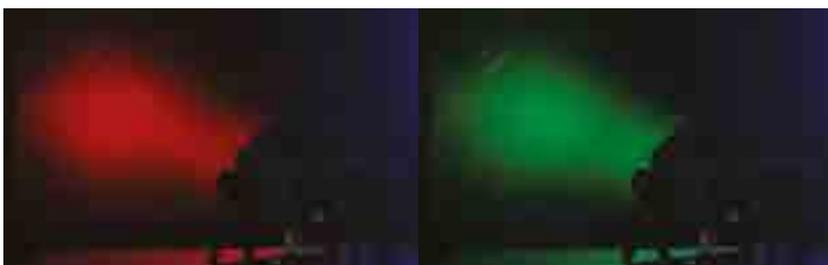



SG SLIMPAR12DL - PRODUCT CODE

LIGHT SOURCE

- 12x12W led RGBWAU Full Color
- LED lifespan: >50.000h
- LED refresh frequency: >400Hz flicker free

OPTIC SYSTEM

- Beam angle: 25°
- Luminous flux: 1210 lux @5mt (25°)

COLOR SYSTEM

- LED source 6 in 1 RGBWAU Full Color
- Infinite chromatic possibilities and colour temperature control
- Color temperature control with Amber color
- "Dark Light" technology LED UV (Ultra Violet)
- 2 color macros can be recalled by DMX

EFFECTS

- Linear Dimmer 0-100%
- Electronic strobe: 1-20 flashes/s with adjustable speed

CONTROL AND PROGRAMMING

- 4 DMX configurations available: 1/6/7/10 channels
- Protocol USITT DMX 512
- Master / Slave mode
- Sound mode with adjustable mic sensitivity
- Static color mode with independent adjustment of strobe
- Automatic mode with 2 different programs selectable from the display with independent adjustment of the speed and strobe
- Color mode with 50 different pre-programmed color macros with independent adjustment of the strobe
- IR remote controller included with possibility to recall colors or macros

STRUCTURE AND CABINET



- ABS housing, black color
- Red LED display
- Mounting points: double adjustable bracket
- "light up" positioning without brackets
- 3-poles XLR in/out connection
- IP rating: IP 20
- Forced air fan cooling system

POWER SUPPLY

- Input Voltage: AC~100-240V 50/60Hz
- Switching power supply unit
- Max power: 160W @ 230VAC
- Power IN/OUT connection with VDE socket
- Power supply cable 1,5 mt included
- Max 4 pcs linkable @240V

WEIGHT AND DIMENSIONS

- Net weight: 2,1 kg
- Dimensions: 257x130x240 mm

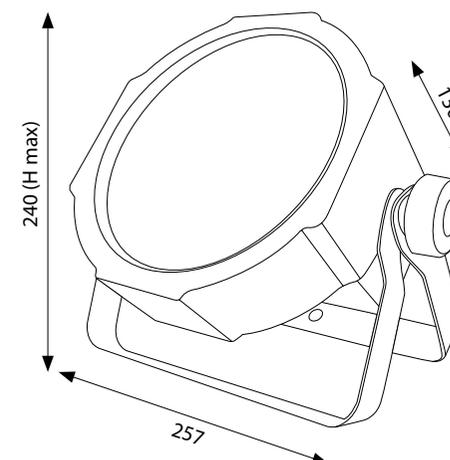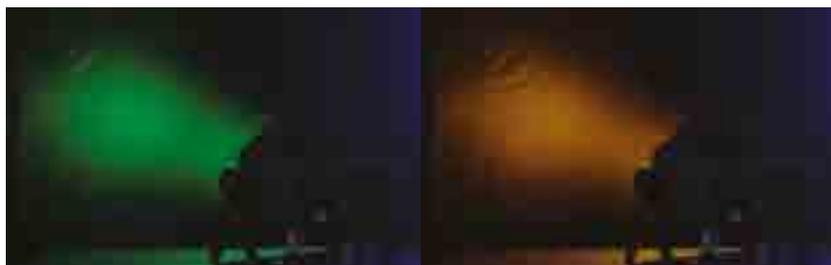

LED PROJECTORS
SLIMPAR 12 DL



SG SLIMPAR12 - PRODUCT CODE

LIGHT SOURCE

- 12x8W led RGBW Full Color
- LED lifespan: >50.000h
- LED refresh frequency: >400Hz flicker free

OPTIC SYSTEM

- Beam angle: 25°
- Luminous flux: 1060 lux @5mt (25°)

COLOR SYSTEM

- LED source 4 in 1 RGBW Full Color
- Infinite chromatic possibilities and colour temperature control
- 2 color macros can be recalled by DMX

EFFECTS

- Linear Dimmer 0-100%
- Electronic strobe: 1-20 flashes/s with adjustable speed

CONTROL AND PROGRAMMING

- 4 DMX configurations available: 1/4/5/8 channels
- Protocol USITT DMX 512
- Master / Slave mode
- Sound mode with adjustable mic sensitivity
- Static color mode with independent adjustment of strobe
- Automatic mode with 2 different programs selectable from the display with independent adjustment of the speed and strobe
- Color mode with 50 different pre-programmed color macros with independent adjustment of the strobe
- IR remote controller included with possibility to recall colors or macros

STRUCTURE AND CABINET



- ABS housing, black color
- Red LED display
- Mounting points: double adjustable bracket
- "light up" positioning without brackets
- 3-poles XLR in/out connection
- IP rating: IP 20
- Forced air fan cooling system

POWER SUPPLY

- Input Voltage: AC~100-240V 50/60Hz
- Switching power supply unit
- Max power: 110W @ 230VAC
- Power IN/OUT connection with VDE socket
- Power supply cable 1,5 mt included
- Max 6 pcs linkable @240V

WEIGHT AND DIMENSIONS

- Net weight: 2,1 kg
- Dimensions: 257x130x240 mm

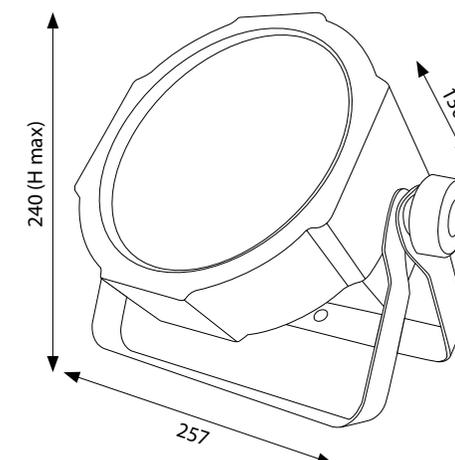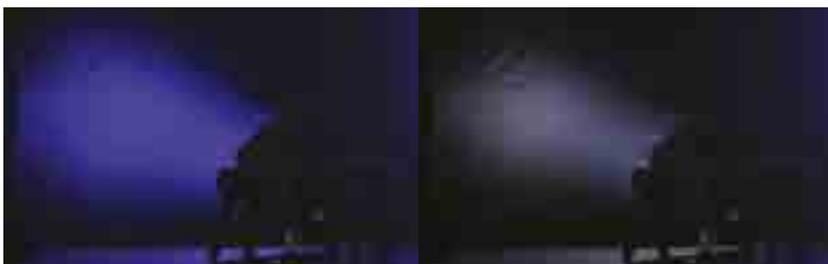



SG SLIMPAR18 - PRODUCT CODE

LIGHT SOURCE

- 18x3W led RGB Full Color
- LED lifespan: >50.000h
- LED refresh frequency: >400Hz flicker free

OPTIC SYSTEM

- Beam angle: 25°
- Luminous flux: 1140 lux @5mt (25°)

COLOR SYSTEM

- LED source 3 in 1 RGB Full Color
- Infinite chromatic possibilities and colour temperature control
- 2 color macros can be recalled by DMX

EFFECTS

- Linear Dimmer 0-100%
- Electronic strobe: 1-20 flashes/s with adjustable speed

CONTROL AND PROGRAMMING

- 4 DMX configurations available: 1/3/4/7 channels
- Protocol USITT DMX 512
- Master / Slave mode
- Sound mode with adjustable mic sensitivity
- Static color mode with independent adjustment of strobe
- Automatic mode with 2 different programs selectable from the display with independent adjustment of the speed and strobe
- Color mode with 50 different pre-programmed color macros with independent adjustment of the strobe
- IR remote controller included with possibility to recall colors or macros

STRUCTURE AND CABINET



- ABS housing, black color
- Red LED display
- Mounting points: double adjustable bracket
- "light up" positioning without brackets
- 3-poles XLR in/out connection
- IP rating: IP 20
- Forced air fan cooling system

POWER SUPPLY

- Input Voltage: AC~100-240V 50/60Hz
- Switching power supply unit
- Max power: 70W @ 230VAC
- Power IN/OUT connection with VDE socket
- Power supply cable 1,5 mt included
- Max 6 pcs linkable @240V

WEIGHT AND DIMENSIONS

- Net weight: 2,1 kg
- Dimensions: 257x130x240 mm

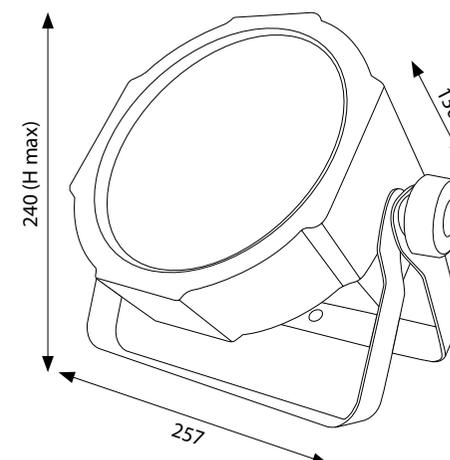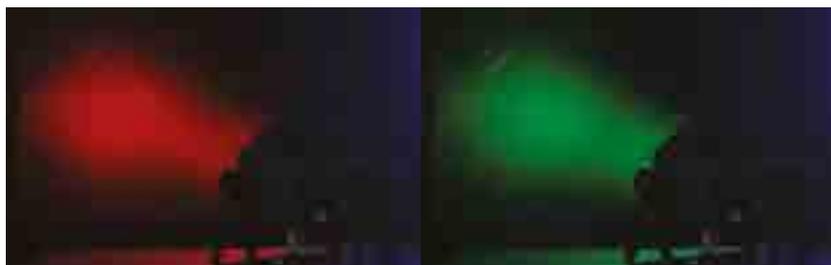

LED PROJECTORS
SLIMPAR 18



LED PROJECTORS SLIMPAR 18C



SG SLIMPAR18C - PRODUCT CODE

LIGHT SOURCE

- 18x1W led RGB
- LED lifespan: > 50.000h

OPTIC SYSTEM

- Beam Angle: 25°

COLOR SYSTEM

- LED source RGBW (6R - 6G - 6B)
- Infinite chromatic possibilities

EFFECTS

- Linear dimmer 0-100%
- Adjustable strobe effect
- Random strobe effect
- Color macros selectable via DMX

CONTROL AND PROGRAMMING

- 1 DMX configuration available: 6 channels
- Protocol USITT DMX 512
- Master/Slave mode
- Sound mode
- Auto mode
- IR remote controller included with possibility to recall colors or macros

STRUCTURE AND CABINET



- ABS housing black color
- Red LED display
- Mounting points: double adjustable bracket
- "Light-up" positioning without brackets
- XLR 3-poles DMX IN/OUT connection
- IP rating: IP20
- Forced air fan cooling system

POWER SUPPLY

- Input Voltage: AC~100-240V, 50/60 Hz
- Switching power supply unit
- Max power: 25W @ 230VAC
- Power supply cable 1mt included

WEIGHT AND DIMENSIONS

- Net weight: 1,25 kg
- Dimensions: 230x105x200 mm

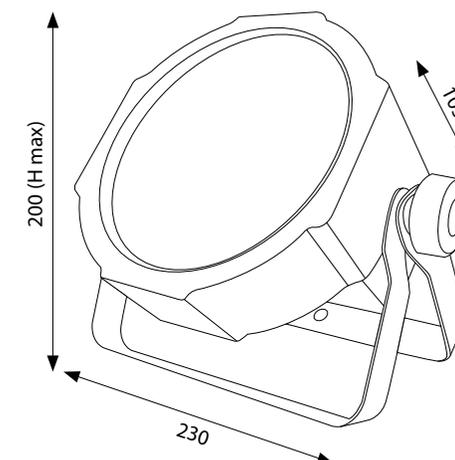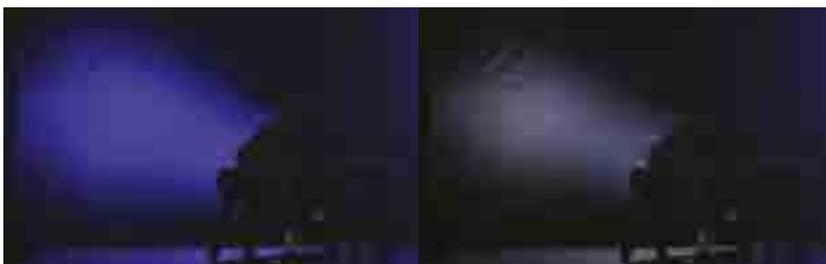



SG SLIMPAR18CDL - PRODUCT CODE

LIGHT SOURCE

- 18x1W led UV
- LED lifespan: > 50.000h

OPTIC SYSTEM

- Beam Angle: 25°

COLOR SYSTEM

- LED source UV

EFFECTS

- Linear dimmer 0-100%
- Adjustable strobe effect
- Random strobe effect

CONTROL AND PROGRAMMING

- 1 DMX configuration available: channels
- Protocol USITT DMX 512
- Master/Slave mode
- Sound mode
- Auto mode
- IR remote control

STRUCTURE AND CABINET

- ABS housing black color
- Red LED display
- Mounting points: double adjustable bracket
- "Light-up" positioning without brackets
- XLR 3-poles DMX IN/OUT connection
- IP rating: IP20
- Forced air fan cooling system


POWER SUPPLY

- Input Voltage: AC~100-240V, 50/60 Hz
- Switching power supply unit
- Max power: 25W @ 230VAC
- Power supply cable 1mt included

WEIGHT AND DIMENSIONS

- Net weight: 1,25 kg
- Dimensions: 230x105x200 mm

**LED PROJECTORS
SLIMPAR 18C DL**

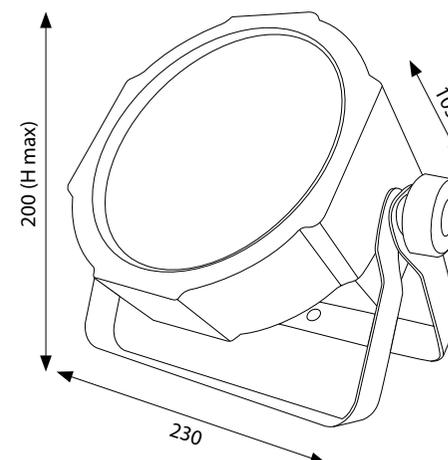



LED PROJECTORS SLIMPAR 36C



SG SLIMPAR36C - PRODUCT CODE

LIGHT SOURCE

- 36x1 led WW/CW
- LED lifespan: > 50.000h

OPTIC SYSTEM

- Beam Angle: 25°

COLOR SYSTEM

- LED source WW/CW (18WW - 18CW)
- Color temperature control

EFFECTS

- Linear dimmer 0-100%
- Adjustable strobe effect
- Random strobe effect

CONTROL AND PROGRAMMING

- 3 DMX configurations available: 1/4/6 channels
- Protocol USITT DMX 512
- Master/Slave mode
- Sound mode
- Auto mode
- IR remote controller included with possibility to recall colors or macros

STRUCTURE AND CABINET



- ABS housing black color
- Red LED display
- Mounting points: double adjustable bracket
- "Light-up" positioning without brackets
- XLR 3-poles DMX IN/OUT connection
- IP rating: IP20
- Forced air fan cooling system

POWER SUPPLY

- Input Voltage: AC~100-240V, 50/60 Hz
- Switching power supply unit
- Max power: 40W @ 230VAC
- Power supply cable 1mt included

WEIGHT AND DIMENSIONS

- Net weight: 1,65 kg
- Dimensions: 257x130x240 mm

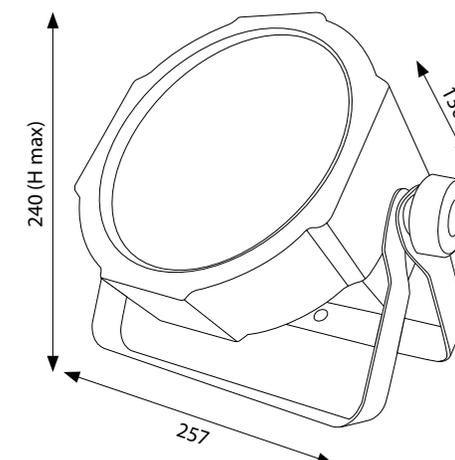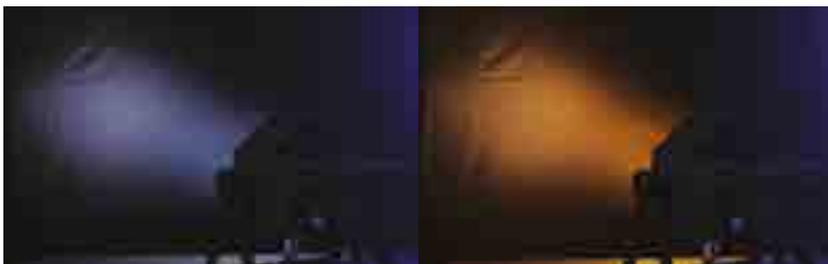



SG SLIMPARFLC - PRODUCT CODE

LIGHT SOURCE

- 224x0,5W led Edison 6500K
- LED lifespan: > 50.000h

OPTIC SYSTEM

- Beam Angle: 120°

COLOR SYSTEM

- LED source 224x0,5W led Edison 6500K

EFFECTS

- Linear dimmer 0-100%
- Adjustable strobe effect
- Random strobe effect
- Circular sectors control

CONTROL AND PROGRAMMING

- 7 DMX configurations available: 1/2/4/7/8/9/11 channels
- Protocol USITT DMX 512
- Master/Slave mode
- Sound mode
- Auto mode
- IR remote controller included with possibility to recall colors or macros

STRUCTURE AND CABINET



- ABS housing black color
- Red LED display
- Mounting points: double adjustable bracket
- "Light-up" positioning without brackets
- XLR 3-poles DMX IN/OUT connection
- IP rating: IP20
- Forced air fan cooling system

POWER SUPPLY

- Input Voltage: AC~100-240V, 50/60 Hz
- Switching power supply unit
- Max power: 90W @ 230VAC
- Power supply cable 1mt included

WEIGHT AND DIMENSIONS

- Net weight: 1,5 kg
- Dimensions: 257x130x240 mm

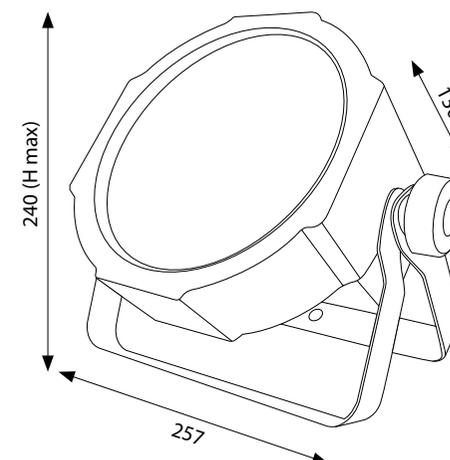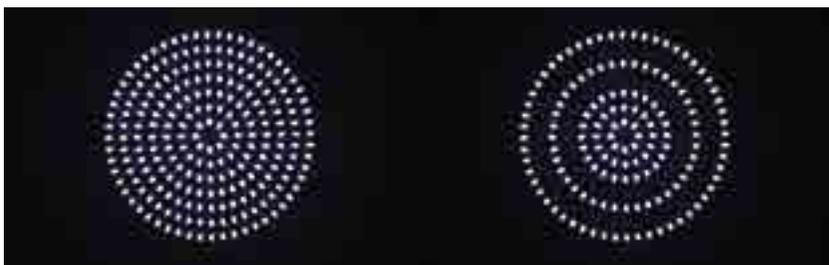



LED PROJECTORS SLIMPAR COB 30



NEW

SG SLIMPARCOB30 - PRODUCT CODE

LIGHT SOURCE

- 1x30W RGBW COB led
- LED lifespan: >50.000h
- LED refresh frequency: >400Hz flicker-free

OPTIC SYSTEM

- Beam angle: 50°

COLOR SYSTEM

- RGBW full color mixing
- Infinite chromatic possibilities

EFFECTS

- Fine linear Dimmer 0-100%
- Adjustable strobe 1-10 flash/s

CONTROL AND PROGRAMMING

- 1 DMX configuration available: 7 channels
- Protocol USITT DMX 512
- Master/Slave mode
- Sound Mode
- Automatic mode
- IIR remote controller included with possibility to recall colors or macros

STRUCTURE AND CABINET



- High resistance ABS housing, black color
- Red led display
- Mounting points: double adjustable bracket system
- "Light-up" positioning without brackets
- 3 poles XLR in-out dmx signal connection
- IP20 protection grade
- Convection cooling system without fans

POWER SUPPLY

- Input Voltage: AC~100-240V, 50/60 Hz
- Switching power supply unit
- Max power: 35W @ 230VAC
- Power supply cable included

WEIGHT AND DIMENSIONS

- Net weight: 1,9 kg
- Dimensions: 260x180x240 mm

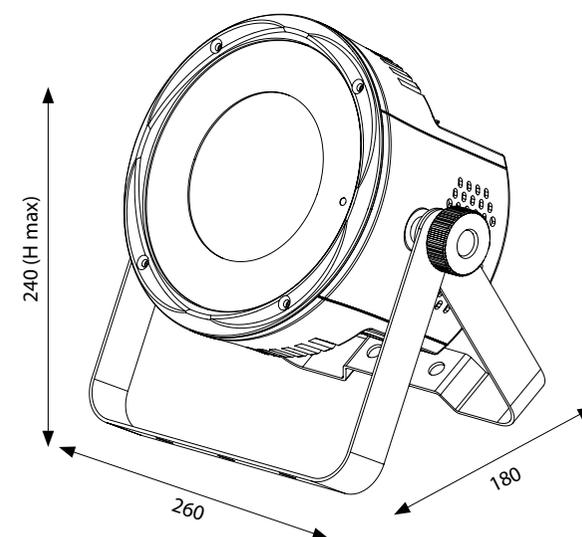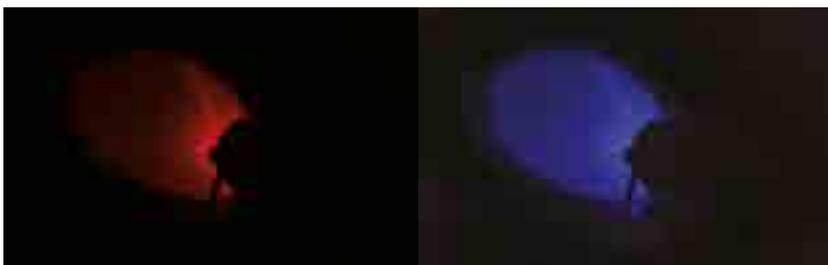



SG SLIMPARCOB60 - PRODUCT CODE

LIGHT SOURCE

- 1x60W RGBW COB led
- LED lifespan: >50.000h
- LED refresh frequency: >400Hz flicker-free

OPTIC SYSTEM

- Beam angle: 50°

COLOR SYSTEM

- RGBW full color mixing
- Infinite chromatic possibilities

EFFECTS

- Fine linear Dimmer 0-100%
- Adjustable strobe 1-10 flash/s

CONTROL AND PROGRAMMING

- 1 DMX configuration available: 7 channels
- Protocol USITT DMX 512
- Master/Slave mode
- Sound Mode
- Automatic mode
- IR remote controller included with possibility to recall colors or macros



STRUCTURE AND CABINET



- High resistance ABS housing, black color
- Red led display
- Mounting points: double adjustable bracket system
- "Light-up" positioning without brackets
- 3 poles XLR in-out dmx signal connection
- IP20 protection grade
- Convection cooling system without fans

POWER SUPPLY

- Input Voltage: AC~100-240V, 50/60 Hz
- Switching power supply unit
- Max power: 65W @ 230VAC
- Power supply cable included

WEIGHT AND DIMENSIONS

- Net weight: 1,9 kg
- Dimensions: 260x180x240 mm

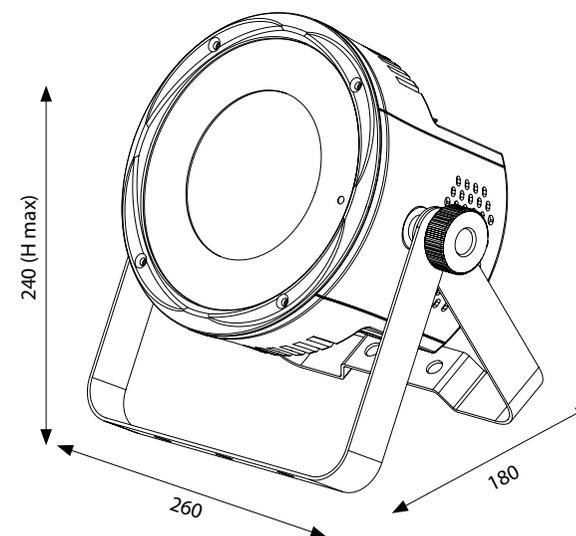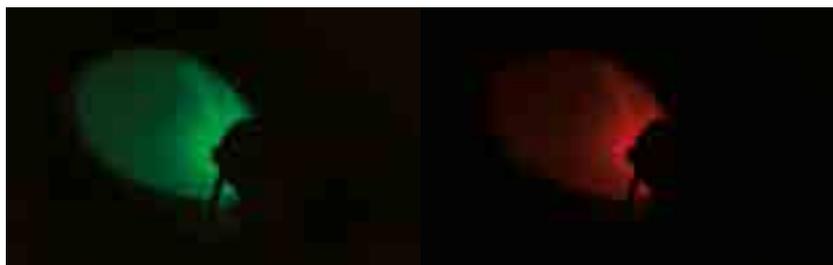

**LED PROJECTORS
SLIMPAR COB 60**



LED PROJECTORS SLIMPAR COB 100



NEW

SG SLIMPARCOB100 - PRODUCT CODE

LIGHT SOURCE

- 1x100W RGBW COB led
- LED lifespan: >50.000h
- LED refresh frequency: >400Hz flicker-free

OPTIC SYSTEM

- Beam angle: 50°

COLOR SYSTEM

- RGBW full color mixing
- Infinite chromatic possibilities

EFFECTS

- Fine linear Dimmer 0-100%
- Adjustable strobe 1-10 flash/s

CONTROL AND PROGRAMMING

- 1 DMX configuration available: 7 channels
- Protocol USITT DMX 512
- Master/Slave mode
- Sound Mode
- Automatic mode
- IR remote control
- IR remote controller included with possibility to recall colors or macros

STRUCTURE AND CABINET


- High resistance ABS housing, black color
- Red led display
- Mounting points: double adjustable bracket system
- "Light-up" positioning without brackets
- 3 poles XLR in-out dmx signal connection
- IP20 protection grade
- Convection cooling system without fans

POWER SUPPLY

- Input Voltage: AC~100-240V, 50/60 Hz
- Switching power supply unit
- Max power: 105W @ 230VAC
- Power supply cable included

WEIGHT AND DIMENSIONS

- Net weight: 1,9 kg
- Dimensions: 260x180x240 mm

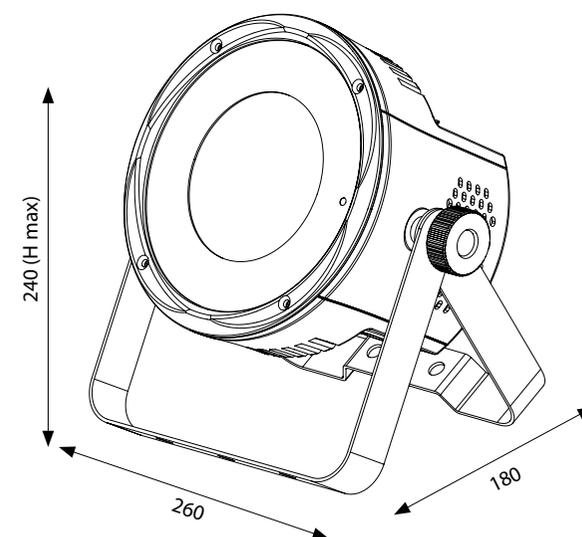



STAGE LEDS



SG BLINDER2L - PRODUCT CODE

LIGHT SOURCE

- 2X100W COB led
- LED lifespan: >50.000h
- LED refresh frequency: >400Hz flicker free

OPTIC SYSTEM

- Beam angle: 50°
- Luminous flux: 535lux @ 4mt

COLOR SYSTEM

- LED source COB warm white 3200K

EFFECTS

- High precision linear Dimmer 0-100%
- Electronic strobe: 1-20 flashes/s with adjustable speed
- Singol led control

CONTROL AND PROGRAMMING

- 3 DMX configurations available: 1/2/6 channels
- Protocol USITT DMX 512
- Master / Slave mode
- Sound mode with adjustable mic sensitivity
- Automatic mode with 3 different programs selectable from the display with independent adjustment of the speed and strobe

STRUCTURE AND CABINET


- Metal housing black color
- Red LED graphic display
- 3-poles XLR in/out connection
- IP rating: IP 20

POWER SUPPLY

- Input Voltage: AC~100-240V 50/60Hz
- Switching power supply unit
- Max power: 220W @ 230VAC
- Power IN/OUT connection with Powecon
- Power supply cable 1,5 mt included
- Max 5 pcs linkable @240V

WEIGHT AND DIMENSIONS

- Net weight: 3,6kg
- Dimensions: 370x150x240mm

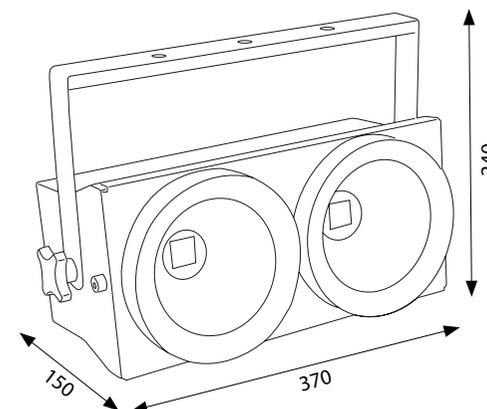



SG BLINDER4L - PRODUCT CODE

LIGHT SOURCE

- 4X100W COB led
- LED lifespan: >50,000h
- LED refresh frequency: >400Hz flicker free

OPTIC SYSTEM

- Beam angle: 50°
- Luminous flux: 840lux @ 4mt

COLOR SYSTEM

- LED source COB warm white 3200K

EFFECTS

- High precision linear Dimmer 0-100%
- Electronic strobe: 1-20 flashes/s with adjustable speed
- Singol led control

CONTROL AND PROGRAMMING

- 3 DMX configurations available: 1/2/4/8 channels
- Protocol USITT DMX 512
- Master / Slave mode
- Sound mode with adjustable mic sensitivity
- Automatic mode with 3 different programs selectable from the display with independent adjustment of the speed and strobe

STRUCTURE AND CABINET

- Metal housing black color
- Red LED graphic display
- 3-poles XLR in/out connection
- IP rating: IP 20



POWER SUPPLY

- Input Voltage: AC~100-240V 50/60Hz
- Switching power supply unit
- Max power: 450W @ 230VAC
- Power IN/OUT connection with Powecon
- Power supply cable 1,5 mt included
- Max 3 pcs linkable @240V

WEIGHT AND DIMENSIONS

- Net weight: 7,8kg
- Dimensions: 405x120x495 mm

STAGE LEDS BLINDER 4

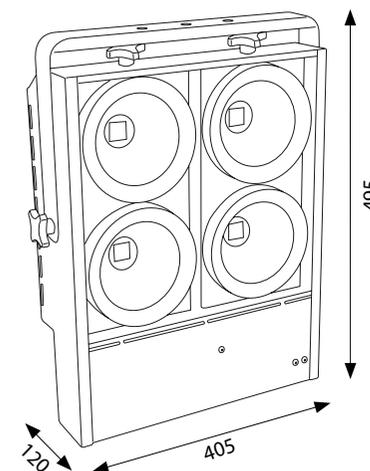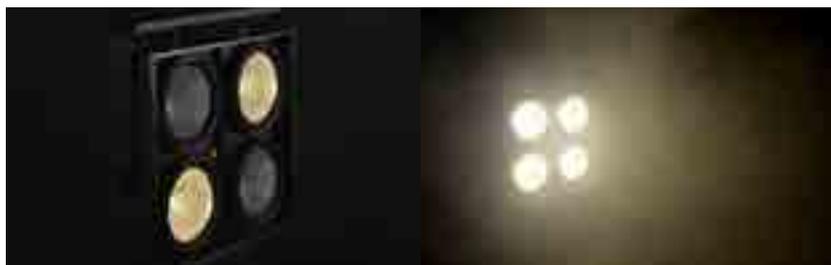



SG HTZLEDC - PRODUCT CODE
SG CASEHTZ - CASE (6X SG HTZLEDC)

LIGHT SOURCE

- 18x8W led RGBW Full Color
- LED lifespan: >50.000h
- LED refresh frequency: >400Hz flicker free

OPTIC SYSTEM

- Beam angle: zoom from 15° to 60°
- Luminous flux: 2250 lux @3mt (15°)

COLOR SYSTEM

- LED source 4 in 1 RGBW Full Color
- Infinite chromatic possibilities and colour temperature control
- Color macros can be recalled by DMX

EFFECTS

- Linear Dimmer 0-100%
- Electronic strobe: 1-25 flashes/s with adjustable speed

CONTROL AND PROGRAMMING

- 6 DMX configurations available: 5/6/6/7/3/13 channels
- 4 selectable dimmer curves
- Protocol USITT DMX 512
- Master / Slave mode
- Sound mode with adjustable mic sensitivity
- Static color mode with independent adjustment of strobe
- Automatic mode with 10 different programs selectable from the display with independent adjustment of the speed and strobe
- Color mode with different pre-programmed color macros

STRUCTURE AND CABINET


- Die cast aluminium black color
- Red LED display
- Mounting points: double adjustable bracket
- 3-poles XLR in/out connection
- IP rating: IP 20
- Forced air fan cooling system

POWER SUPPLY

- Input Voltage: AC~100-240V 50/60Hz
- Switching power supply unit
- Max power: 160W @ 230VAC

WEIGHT AND DIMENSIONS

- Net weight: 4 kg
- Dimensions: 310x216x325 mm

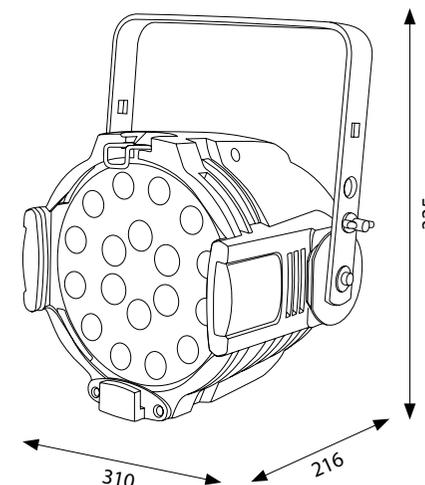

LED BATTERY PROJECTORS





LED BATTERY PROJECTORS BATI 4 DL



- SG BATI4DL** - PRODUCT CODE
- SG BATI4TX** - DMX WIRELESS TRANSMITTER
- SG CASEBATI4** - CASE WITH CHARGE SYSTEM (8X SG BATI4DL)
- SG BATI4DLKIT** - KIT (8X SG BATI4DL + 1X SG CASEBATI4)
- SG BAGBATI4** - SOFTBAG (4X SG BATI4DL)

LIGHT SOURCE

- 4x12W led RGBWA-UV
- LED lifespan: > 50.000h
- LED refresh frequency: > 400Hz flicker-free

OPTIC SYSTEM

- Beam Angle: 15°

COLOR SYSTEM

- LED source RGBWA-UV
- Infinite chromatic possibilities

EFFECTS

- Linear dimmer 0-100%
- Adjustable strobe effect
- Static color mode: manual adjustment for each color
- Manual color mode: static built-in color macros
- Auto mode: built-in automatic programs with adjustable speed
- Sound mode: sound activation with internal microphone with adjustable sensitivity

CONTROL AND PROGRAMMING

- 2 DMX configurations available: 6/10 channels
- Protocol USITT DMX 512
- Built-in Wi-Fi protocol for direct control by smartphone with App
- Built-in DMX wireless receiver (DMX wireless transmitter SG BATI4TX, sold separately)
- IR remote controller included with possibility to recall colors or macros
- Master/Slave mode
- Auto mode

STRUCTURE AND CABINET


- Metal housing
- LCD color graphic display
- "Light up" positioning with adjustable angle
- IP rating: IP20
- 3-poles DMX IN/OUT
- Convection cooling system without fans


POWER SUPPLY

- Input Voltage: AC~100-240V, 50/60 Hz, for normal working and battery recharge
- -Switching power supply unit
- Battery recharge with flight case: 12VDC
- Internal rechargeable battery: 12VDC
- Capacity: 8,8 Ah
- Runtime battery: ~ 5 hrs (full ON)
- Charging cycle: ~ 5 hrs (led blackout when charging)
- Max power: 50W @ 230VAC
- Power IN/OUT connection with powerCON socket

WEIGHT AND DIMENSIONS

- Net weight: 2,5 kg (projector) – 0,3 kg (wireless transmitter)
- Dimensions: 138x138x200 mm (projector)
147x73x40 mm (wireless transmitter)

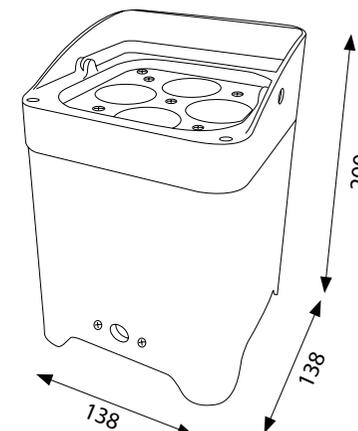


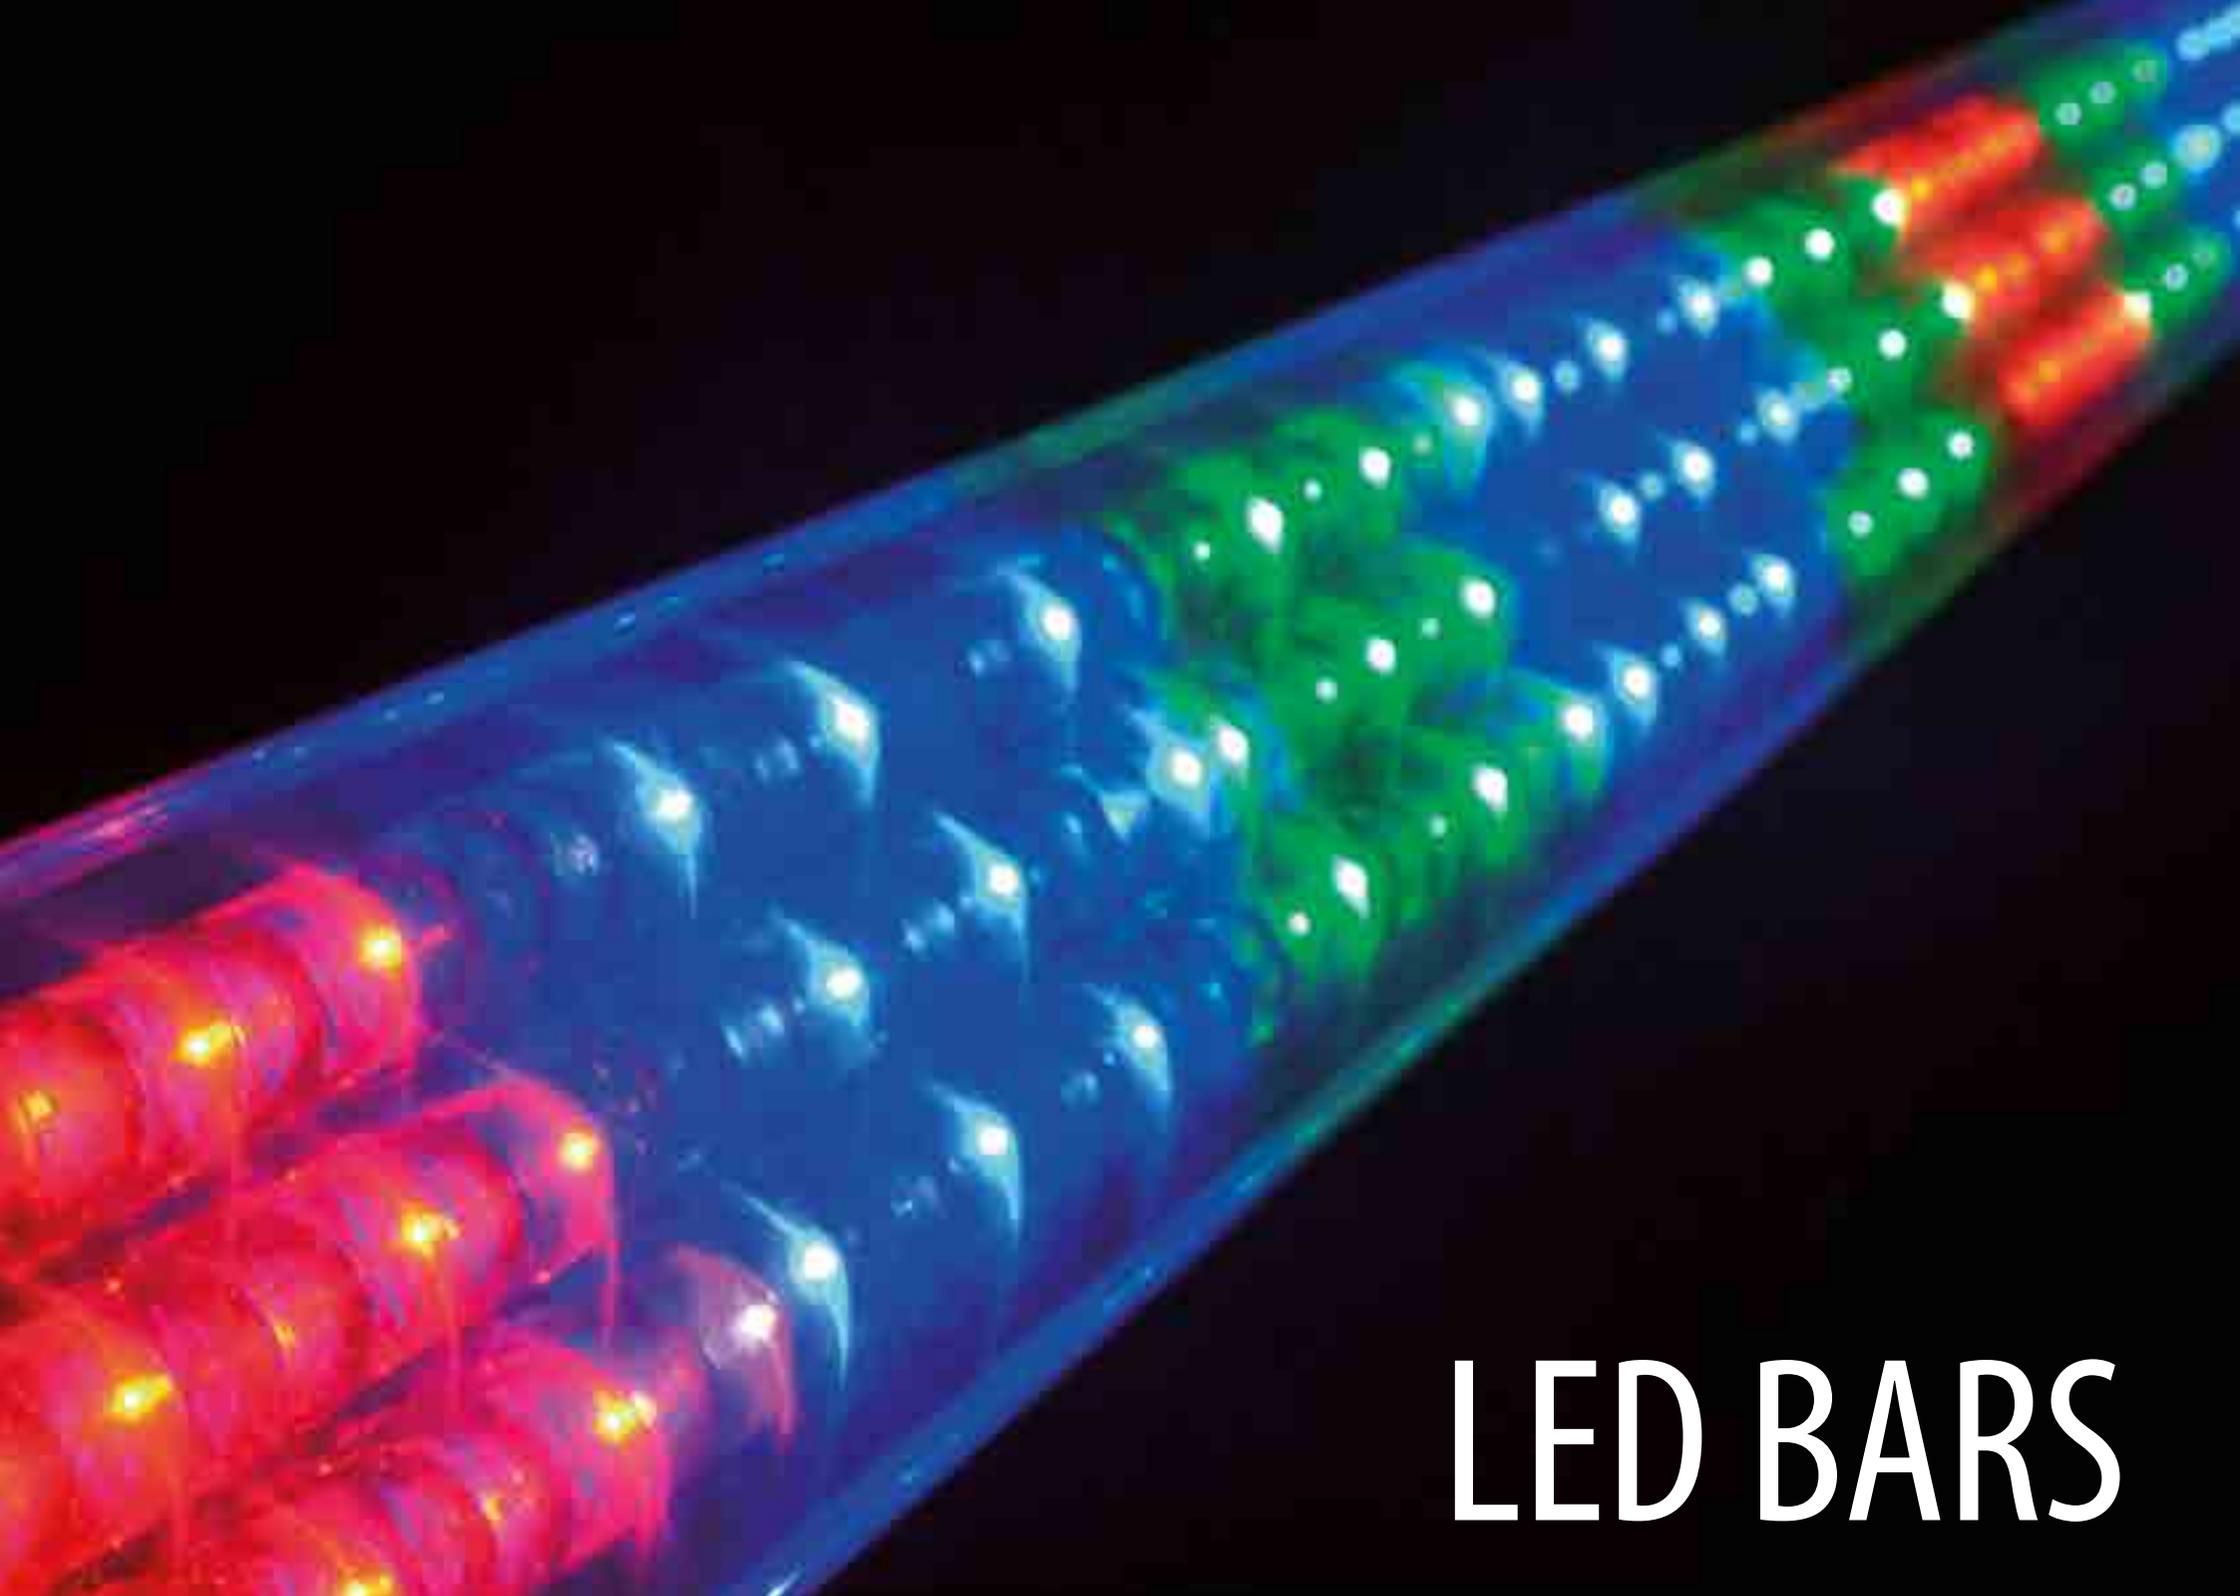

LED BARS



LED BARS SLIMBAR 12P

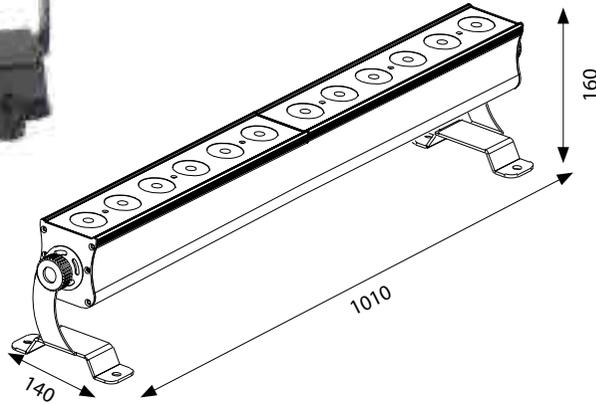

SG SLIMBAR12P - PRODUCT CODE
SG CASESLIMBAR16DL - CASE (4X SG SLIMBAR12P)

LIGHT SOURCE

- 12x15W led RGBW Full Color
- LED lifespan: >50.000h
- LED refresh frequency: >400Hz flicker free

OPTIC SYSTEM

- Beam angle: 10° x 45°
- Luminous flux: 1420 lux @5mt

COLOR SYSTEM

- LED source 4 in 1 RGBW Full Color
- Infinite chromatic possibilities and colour temperature control

EFFECTS

- Linear Dimmer 0-100%
- Electronic strobe: 1-20 flashes/s with adjustable speed
- Color macros selectable by DMX
- Single pixel control

CONTROL AND PROGRAMMING

- 7 DMX configurations available in: 3/4/5/8/10/48/52 channels
- Protocol USITT DMX 512
- Master / Slave mode
- Sound mode with adjustable mic sensitivity
- Static color mode with independent adjustment of strobe
- Automatic mode with 12 different programs selectable from the display with independent adjustment of the speed and strobe
- Color mode with 51 different pre-programmed color macros with independent adjustment of the strobe
- IR remote controller included with possibility to select colors or macros (Included)

STRUCTURE AND CABINET

- Aluminum housing, black color
- color LCD graphic display
- Mounting points: double adjustable bracket on the left and right. Single central bracket for suspension
- "Light up" positioning with angle adjustment
- 3-poles XLR in/out connection
- IP rating: IP 20
- Forced air fan cooling system with electronic control


POWER SUPPLY

- Input Voltage: AC~100-240V 50/60Hz
- Switching power supply unit
- Max power: 190W @ 230VAC
- Power IN/OUT connection with powerCON socket
- Power supply cable 1,5 mt included
- Max 4 pcs linkable @240V

WEIGHT AND DIMENSIONS

- Net weight: 5,1 kg
- Dimensions: 1010x140x160 mm



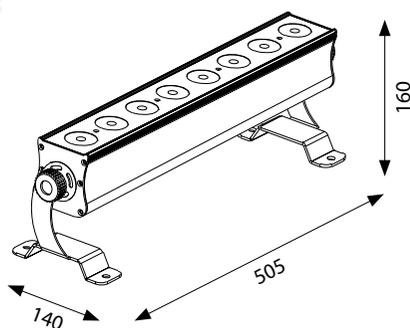

SG SLIMBAR8DL - PRODUCT CODE
SG CASESLIMBAR8DL - CASE (6X SG SLIMBAR8DL)

LIGHT SOURCE

- 8x12W led RGBWAW Full Color
- LED lifespan: >50.000h
- LED refresh frequency: >400Hz flicker free

OPTIC SYSTEM

- Beam angle: 25°
- Luminous flux: 2290 lux @3mt (25°)

COLOR SYSTEM

- LED source 6 in 1 RGBWAW Full Color
- Infinite chromatic possibilities and colour temperature control
- Color temperature control with Amber color
- "Dark Light" technology LED UV (Ultra Violet)
- 2 color macros can be recalled by DMX

EFFECTS

- Linear Dimmer 0-100%
- Electronic strobe: 1-20 flashes/s with adjustable speed

CONTROL AND PROGRAMMING

- 6 DMX configurations available: 1/6/10/12/24/28 channels
- "Double pixel" control system
- Protocol USITT DMX 512
- Master / Slave mode
- Sound mode with adjustable mic sensitivity
- Static color mode with independent adjustment of strobe
- Automatic mode with 12 different programs selectable from the display with independent adjustment of the speed and strobe
- Color mode with 69 different pre-programmed color macros with independent adjustment of the strobe
- IR remote controller included with possibility to recall colors or macros

STRUCTURE AND CABINET

- Aluminum housing, black color
- Blue LCD graphic display
- Mounting points: double adjustable bracket on the left and right. Single central bracket for suspension
- "light up" positioning with angle adjustment
- 3-poles XLR in/out connection
- IP rating: IP 20
- Forced air fan cooling system with electronic control

POWER SUPPLY



- Input Voltage: AC~100-240V 50/60Hz
- Switching power supply unit
- Max power: 110W @ 230VAC
- Power IN/OUT connection with powerCON socket
- Power supply cable 1,5 mt included
- Max 6 pcs linkable @240V

WEIGHT AND DIMENSIONS

- Net weight: 3,6 kg
- Dimensions: 505x140x160 mm



LED BARS SLIMBAR 16 DL

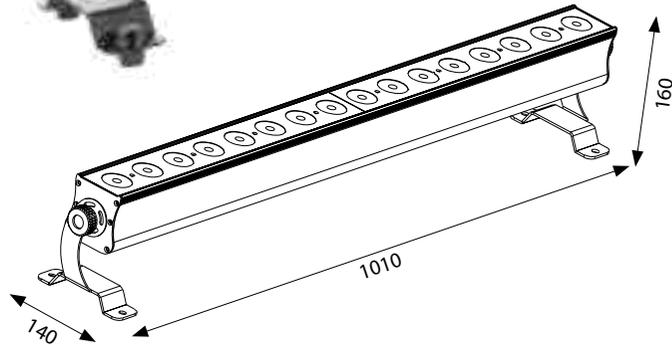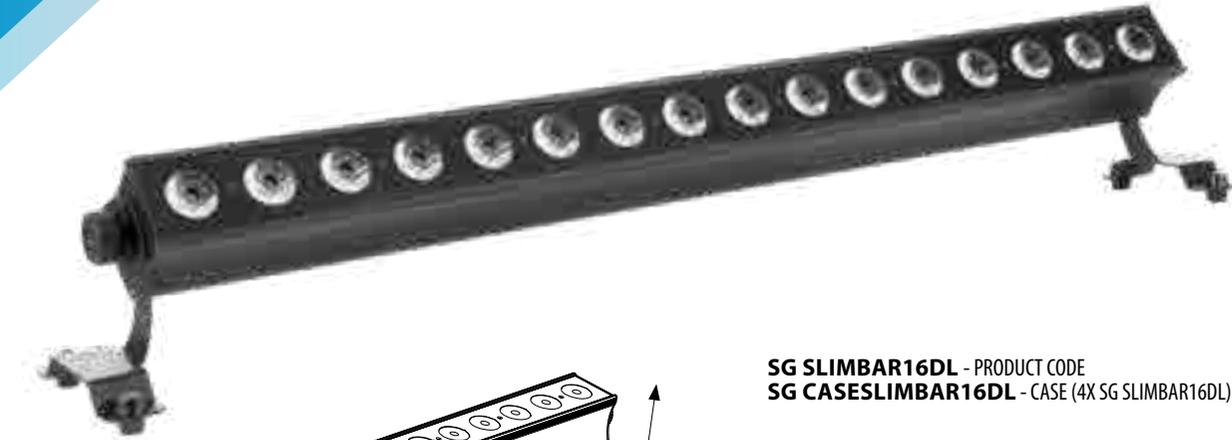

SG SLIMBAR16DL - PRODUCT CODE
SG CASESLIMBAR16DL - CASE (4X SG SLIMBAR16DL)

LIGHT SOURCE

- 16x12W led RGBWAU Full Color
- LED lifespan: >50.000h
- LED refresh frequency: >400Hz flicker free

OPTIC SYSTEM

- Beam angle: 25°
- Luminous flux: 1390 lux @5mt (25°)

COLOR SYSTEM

- LED source 6 in 1 RGBWAU Full Color
- Infinite chromatic possibilities and colour temperature control
- Color temperature control with Amber color
- "Dark Light" technology LED UV (Ultra Violet)
- 2 color macros can be recalled by DMX

EFFECTS

- Linear Dimmer 0-100%
- Electronic strobe: 1-20 flashes/s with adjustable speed

CONTROL AND PROGRAMMING

- 7 DMX configurations available: 1/6/10/12/28/48/52 channels
- "Double pixel" control system
- Protocol USITT DMX 512
- Master / Slave mode
- Sound mode with adjustable mic sensitivity
- Static color mode with independent adjustment of strobe
- Automatic mode with 12 different programs selectable from the display with independent adjustment of the speed and strobe
- Color mode with 69 different pre-programmed color macros with independent adjustment of the strobe
- IR remote controller included with possibility to recall colors or macros

STRUCTURE AND CABINET

- Aluminum housing, black color
- Blue LCD graphic display
- Mounting points: double adjustable bracket on the left and right. Single central bracket for suspension
- "light up" positioning with angle adjustment
- 3-poles XLR in/out connection
- IP rating: IP 20
- Forced air fan cooling system with electronic control

POWER SUPPLY

- Input Voltage: AC~100-240V 50/60Hz
- Switching power supply unit
- Max power: 210W @ 230VAC
- Power IN/OUT connection with powerCON socket
- Power supply cable 1,5 mt included
- Max 4 pcs linkable @240V


WEIGHT AND DIMENSIONS:

- Net weight: 5,1 kg
- Dimensions: 1010x140x160 mm





SG SLIMBAR240 - PRODUCT CODE

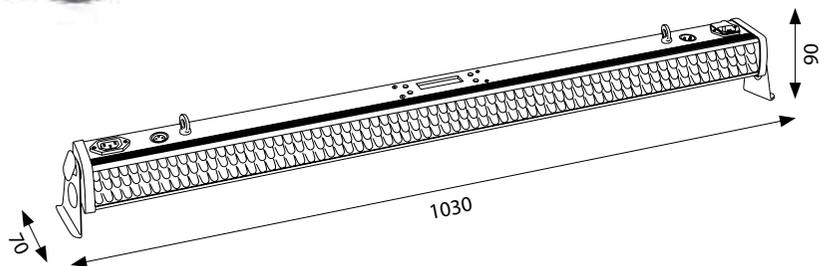

LIGHT SOURCE

- 240 led 10 mm RGB
- LED lifespan: >50.000h
- LED refresh frequency: >400Hz flicker free

OPTIC SYSTEM

- Beam angle: 30°

COLOR SYSTEM

- LED source RGB
- Infinite chromatic possibilities and colour temperature control
- 1 color macro can be recalled by DMX

EFFECTS

- Linear Dimmer 0-100%
- Electronic strobe: 1-20 flashes/s with adjustable speed

CONTROL AND PROGRAMMING

- 6 DMX configurations available: 3/5/8/14/24/26 channels
- 8-sectors control system
- Protocol USITT DMX 512
- Master / Slave mode
- Sound mode with adjustable mic sensitivity
- Automatic mode with 3 different programs selectable from the display with independent adjustment of the speed
- Color mode with 9 different pre-programmed color macros and 1 adjustable color macro
- IR remote controller included with possibility to recall colors or macros

STRUCTURE AND CABINET


- Aluminum housing, black color
- Red LED display
- Mounting points: double adjustable bracket on the left and right
- "Light up" positioning with angle adjustment
- 3-poles XLR in/out connection
- IP rating: IP 20

POWER SUPPLY

- Input Voltage: AC~100-240V 50/60Hz
- Switching power supply unit
- Max power: 35W @ 230VAC
- Power IN/OUT connection with VDE socket
- Power supply cable 1,5 mt included
- Max 12 pcs linkable @240V

WEIGHT AND DIMENSIONS:

- Net weight: 1,6 kg
- Dimensions: 1030x70x90 mm

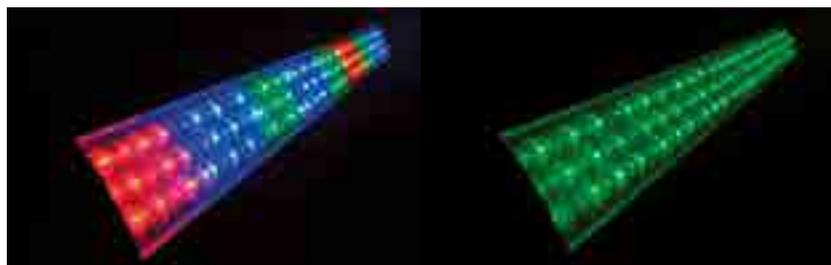

**LED BARS
SLIMBAR 240**

LED PIXEL





SG PIX15 - PRODUCT CODE
SG CASEPIX15 - CASE (6x SG PIX15)

LIGHT SOURCE

- 25x10W led RGBW Full Color
- LED lifespan: >50.000h
- LED refresh frequency: >400Hz flicker free

OPTIC SYSTEM

- Beam angle: 15°
- Luminous flux: 2130 lux @5mt (15°)
- DC (dark cover) optical insulation system

COLOR SYSTEM

- LED source 4 in 1 RGBW Full Color
- Infinite chromatic possibilities
- Color macros can be recalled by DMX

EFFECTS

- Linear Dimmer 0-100%
- Electronic strobe: 1-20 flashes/s with adjustable speed
- Color macros and pixel can be recalled by DMX

CONTROL AND PROGRAMMING

- 5 DMX configurations available: 4/6/8/10/100 channels
- Pixel to pixel control
- 3 selectable dimmer curve
- Protocol USITT DMX 512
- Master / Slave mode
- Sound mode with adjustable mic sensitivity
- Static color mode with independent adjustment of strobe
- Automatic mode with 19 different programs selectable from the display with independent adjustment of the speed

STRUCTURE AND CABINET



- Aluminum housing, black color
- LCD color display
- Mounting points: double central adjustable bracket
- Specific hardware for connection between panels
- 3-poles XLR in/out connection
- IP rating: IP 20
- Fan cooling system without fans

POWER SUPPLY

- Input Voltage: AC~100-240V 50/60Hz
- Switching power supply unit
- Max power: 280W @ 230VAC
- Power IN/OUT connection with powerCON socket
- Power supply cable 1,5 mt included
- Max 6 pcs linkable @240V


WEIGHT AND DIMENSIONS:

- Net weight: 6,8 kg
- Dimensions: 399x113x399 mm

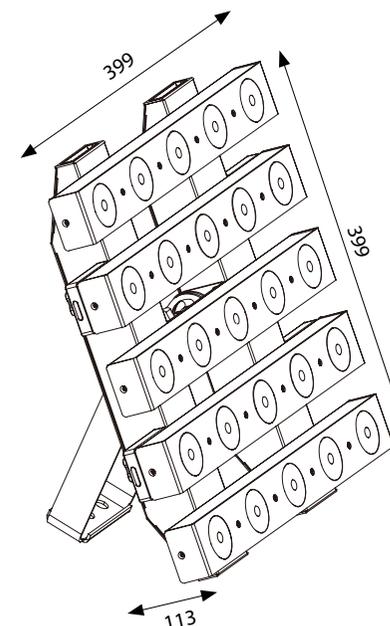



LED PIXEL PIX.i 5 WHITE

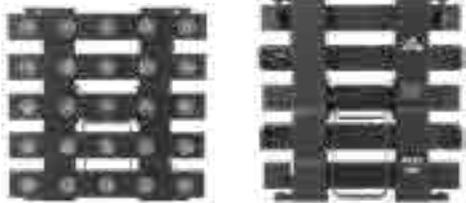

SG PIXI5W - PRODUCT CODE
SG CASEPIXI5 - CASE (6x SGPIXI5W)

LIGHT SOURCE

- 25x3W CREE XPE led Warm White 2800K
- LED lifespan: >50.000h
- LED refresh frequency: >400Hz flicker free

OPTIC SYSTEM

- Beam angle: 5°
- Luminous flux: 7750 lux @5mt (15°)
- DC (dark cover) optical insulation system

COLOR SYSTEM

- LED source CREE Warm White 2800K

EFFECTS

- Linear Dimmer 0-100%
- Electronic strobe: 1-20 flashes/s with adjustable speed
- Color macros and pixel can be recalled by DMX

CONTROL AND PROGRAMMING

- 4 DMX configurations available: 1/2/6/25 channels
- 3 selectable dimmer curves
- Pixel to pixel control
- Protocol USITT DMX 512
- Master / Slave mode
- Sound mode with adjustable mic sensitivity
- Static color mode with independent adjustment of strobe
- Automatic mode with 120 different programs selectable from the display with independent adjustment of the speed

STRUCTURE AND CABINET


- Aluminum housing, black color
- LCD color display
- Mounting points: double central adjustable bracket
- Specific hardware for connection between panels
- 3-poles XLR in/out connection
- IP rating: IP 20
- Fan cooling system without fans


POWER SUPPLY

- Input Voltage: AC~100-240V 50/60Hz
- Switching power supply unit
- Max power: 80W @ 230VAC
- Power IN/OUT connection with powerCON socket
- Power supply cable 1,5 mt included
- Max 8 pcs linkable @240V

WEIGHT AND DIMENSIONS:

- Net weight: 6,8 kg
- Dimensions:: 399x113x399 mm

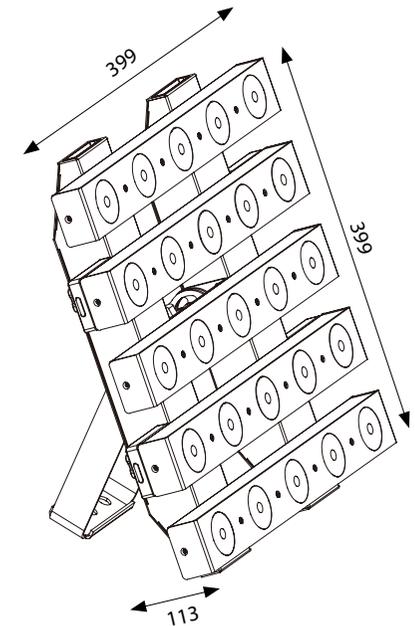

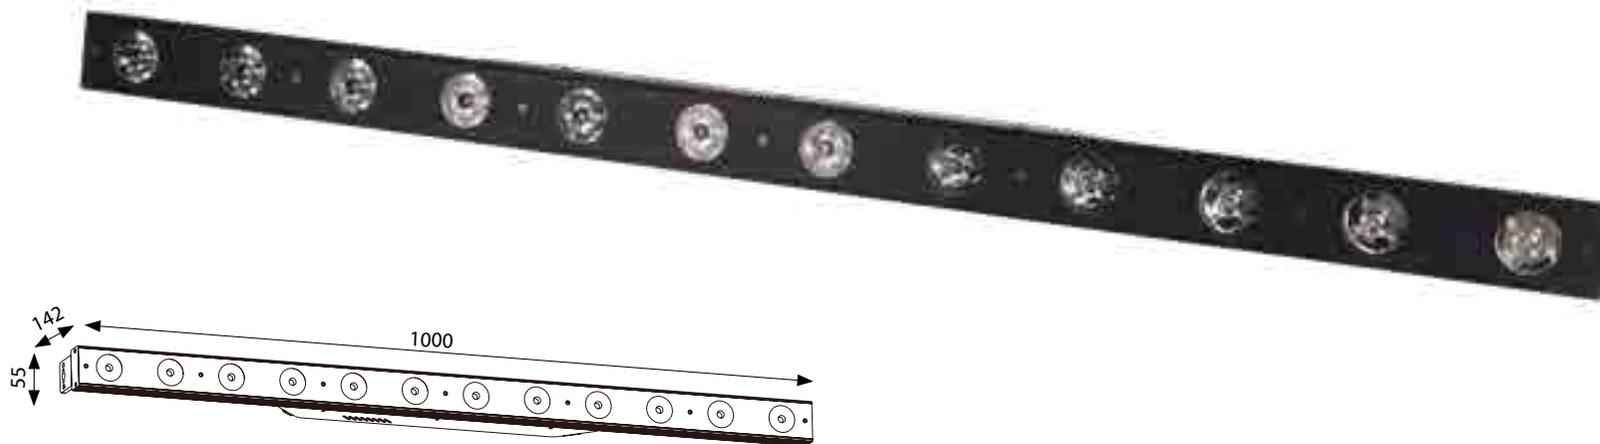

SG PIX15WL - PRODUCT CODE
SG CASEPIX15WL - CASE (8X SG PIX15WL)

LIGHT SOURCE

- 12x3W CREE XPE led Warm White 2800K
- LED lifespan: >50.000h
- LED refresh frequency: >400Hz flicker free

OPTIC SYSTEM

- Beam angle: 5°
- Luminous flux: 3850lux @ 4m
- DC (dark cover) optical insulation system

COLOR SYSTEM

- LED source CREE Warm White 2800K

EFFECTS

- Linear Dimmer 0-100%
- Electronic strobe: 1-20 flashes/s with adjustable speed
- Color macros and pixel can be recalled by DMX

CONTROL AND PROGRAMMING

- 4 DMX configurations available: 2/3/6/12 channels
- 3 selectable dimmer curves
- Pixel to pixel control
- Protocol USITT DMX 512
- Master / Slave mode
- Sound mode with adjustable mic sensitivity
- Static color mode with independent adjustment of strobe
- Automatic mode with independent adjustment of the speed

STRUCTURE AND CABINET


- Alimuminum housing, black color
- LCD color display
- Mounting points: central bracket
- Specific hardware for connection between panels
- 3-poles XLR in/out connection
- IP rating: IP 20
- Fan cooling system without fans

POWER SUPPLY

- Input Voltage: AC~100-240V 50/60Hz
- Switching power supply unit
- Max power: 40W @ 230VAC
- Power IN/OUT connection with powerCON socket
- Power supply cable 1,5 mt included
- Max 20 pcs linkable @240V

WEIGHT AND DIMENSIONS:

- Net weight: 2,5 kg
- Dimensions:: 1000x55x142 mm

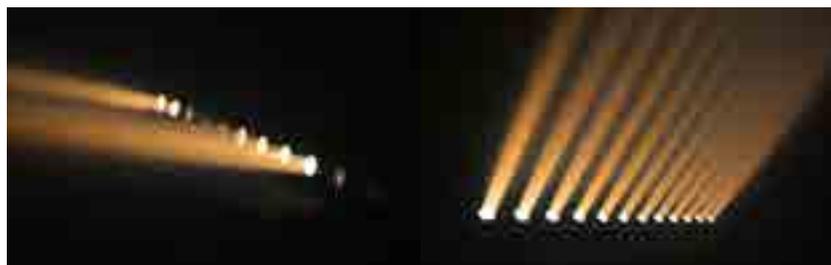



LED KITS



SG LEDKITHP3BAT - PRODUCT CODE

LIGHT SOURCE

- Kit 4 projectors 3x6W led RGBW Full Color
- LED lifespan: > 50.000h

OPTIC SYSTEM

- Beam Angle: 25°

COLOR SYSTEM

- Led Source 4 in 1 RGBW Full Color
- Infinite chromatic possibilities



EFFECTS

- Linear dimmer 0-100%
- Adjustable strobe effect
- Auto mode can be recalled by DMX

CONTROL AND PROGRAMMING

- 7 DMX configurations available: 4/5/6/9/10/16/20 channels
- Each projectopr can be controlled independently via DMX
- Protocol USITT DMX 512
- Master/Slave mode
- Sound mode with adjustable microphone sensitivity
- Automatic mode with 6 different programs selectable from the display or footswitch, with adjustment of the speed
- Color mode with 9 different pre-programmed color macros
- Wireless battery footswitch: Blackout, Sound, Auto, Freeze (included)

STRUCTURE AND CABINET


- Black metal housing
- Red LED display
- Mounting points: double adjustable brackets
- "light up" positioning
- XLR 3-poles DMX IN/OUT connection
- IP rating: IP20
- Stand max. H 2200
- Soft bag for bar for transport included

POWER SUPPLY

- Input Voltage: AC~100-240V, 50/60 Hz
- Switching power supply unit
- Max power: 80W @ 230VAC
- Internal Li – ion rechargeable battery
- Runtime battery: ~ 8 hrs (full ON)
- Charging cycle: ~ 5 hrs (led blackout when charging)
- Power supply cable included

WEIGHT AND DIMENSIONS:

- Bar net weight: 6,3 kg
- Stand net weight: 2,8 kg
- Bar Dimensions:: 950x90x230 mm

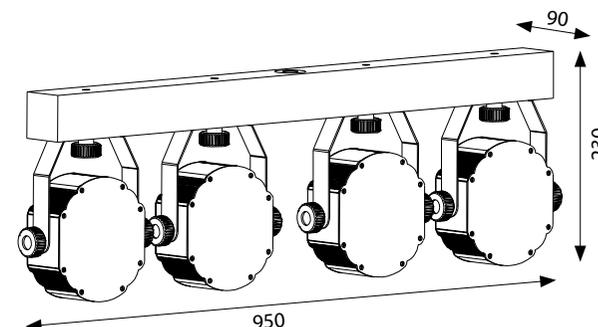

LED KITS
LED KIT 3 BAT



LED KITS LED KIT 3C



SG LEDKITHP3C - PRODUCT CODE

LIGHT SOURCE

- Kit 4 projectors 3x6W led RGBW Full Color
- LED lifespan: > 50.000h

OPTIC SYSTEM

- Beam Angle: 25°

COLOR SYSTEM

- Led Source 4 in 1 RGBW Full Color
- Infinite chromatic possibilities

EFFECTS

- Linear dimmer 0-100%
- Adjustable strobe effect
- Auto mode can be recalled by DMX

CONTROL AND PROGRAMMING

- 5 DMX configurations available: 4/6/10/16/18 channels
- Each projectopr can be controlled independently via DMX
- Protocol USITT DMX 512
- Master/Slave mode
- Sound mode with adjustable microphone sensitivity
- Automatic mode with 6 different programs selectable from the display or footswitch, with adjustment of the speed
- Color mode with 9 different pre-programmed color macros
- Footswitch control included: Blackout, Sound, Auto, Freeze

STRUCTURE AND CABINET


- Black metal housing
- Red LED display
- Mounting points: double adjustable brackets
- "light up"positioning
- XLR 3-poles DMX IN/OUT connection
- IP rating: IP20
- Stand max. H 2200
- Soft bag for bar for transport included

POWER SUPPLY

- Input Voltage: AC~100-240V, 50/60 Hz
- Switching power supply unit
- Max power: 80W @ 230VAC
- Power supply cable included

WEIGHT AND DIMENSIONS:

- Bar net weight: 5,8 kg
- Stand net weight: 2,8 kg
- Bar Dimensions: 950x90x230 mm

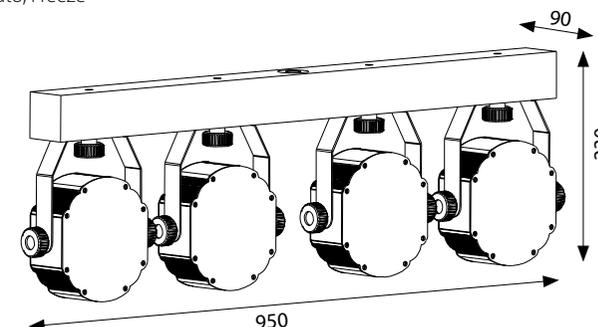



SG LEDKITHP7BAT - PRODUCT CODE

LIGHT SOURCE

- Kit 4 projectors 7x10W led RGBW Full Color
- LED lifespan: > 50.000h

OPTIC SYSTEM

- Beam Angle: 25°

COLOR SYSTEM

- Led Source 4 in 1 RGBW Full Color
- Infinite chromatic possibilities

EFFECTS

- Linear dimmer 0-100%
- Adjustable strobe effect
- Auto mode can be recalled by DMX

CONTROL AND PROGRAMMING

- 7 DMX configurations available: 4/5/6/9/10/16/20 channels
- Each projector can be controlled independently via DMX
- Protocol USITT DMX 512
- Master/Slave mode
- Sound mode with adjustable microphone sensitivity
- Automatic mode with 6 different programs selectable from the display or footswitch, with adjustment of the speed
- Color mode with 9 different pre-programmed color macros
- Wireless battery footswitch: Blackout, Sound, Auto, Freeze (included)

STRUCTURE AND CABINET


- Black metal housing
- Red LED display
- Mounting points: double adjustable brackets "light up" positioning
- XLR 3-poles DMX IN/OUT connection
- IP rating: IP20
- Stand max. H 2800
- Soft bag for bar for transport included

POWER SUPPLY

- Input Voltage: AC~100-240V, 50/60 Hz
- Switching power supply unit
- Max power: 300W @ 230VAC
- Internal Li – ion rechargeable battery
- Runtime battery: ~ 6 hrs (full ON)
- Charging cycle: ~ 5 hrs (led blackout when charging)
- Power supply cable included

WEIGHT AND DIMENSIONS:

- Bar net weight: 9,6 kg
- Stand net weight: 4,5 kg
- Bar Dimensions:: 1180x90x270 mm

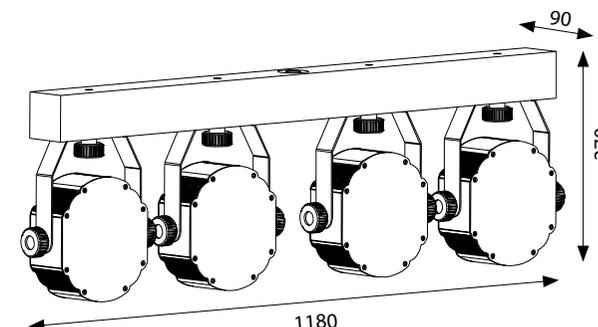

LED KITS
LED KIT 7 BAT



LED KITS LED KIT 7



SG LEDKITHP7 - PRODUCT CODE

LIGHT SOURCE

- Kit 4 projectors 7x10W led RGBW Full Color
- LED lifespan: >50.000h
- LED refresh frequency: >400Hz flicker free

OPTIC SYSTEM

- Beam angle: 25°

COLOR SYSTEM

- LED source 4 in 1 RGBW Full Color
- Infinite chromatic possibilities and colour temperature control

EFFECTS

- Linear Dimmer 0-100%
- Electronic strobe: 1-20 flashes/s with adjustable speed
- 1 Auto mode can be recalled by DMX

CONTROL AND PROGRAMMING

- 5 DMX configurations available: 4/6/10/16/18 channels
- Each projector can be controlled independently
- Protocol USITT DMX 512
- Master / Slave mode
- Sound mode with adjustable mic sensitivity
- Automatic mode with 6 different programs selectable from the display or footswitch with independent adjustment of the speed
- Color mode with 9 different pre-programmed color macros + 1 adjustable macro
- Footswitch control included: Blackout, Sound, Auto, Freeze

STRUCTURE AND CABINET


- Metal housing, black color
- Red LED display
- Mounting points: double adjustable bracket
- "light up" positioning
- 3-poles XLR in/out connection
- IP rating: IP 20
- Stand max. H 2800 mm with bag for transport included
- Semi rigid bag for bar transport included


POWER SUPPLY

- Input Voltage: AC~100-240V 50/60Hz
- Switching power supply unit
- Max power: 300W @ 230VAC
- Power IN/OUT connection with VDE socket
- Power supply cable 1,5 mt included
- Max 4 pcs linkable @240V

WEIGHT AND DIMENSIONS:

- Bar Net weight: 8,5 kg
- Stand Net weight: 4,5 kg
- Bar Dimensions:: 1180x90x270 mm

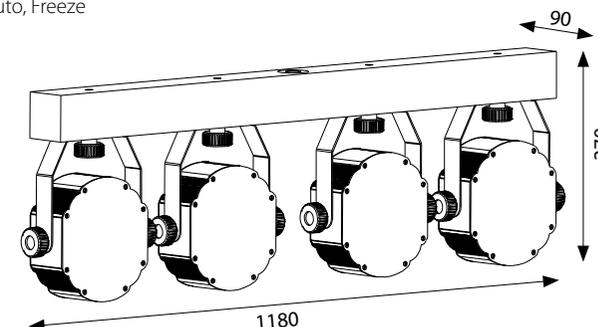

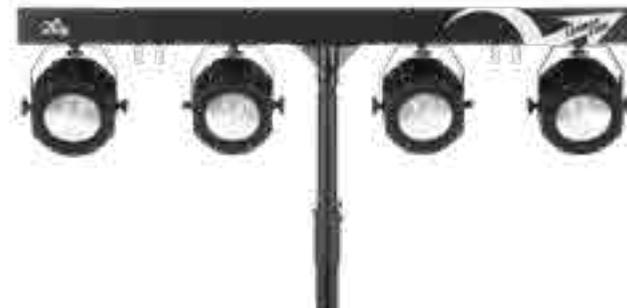

SG LEDKITHPCOB - PRODUCT CODE

LIGHT SOURCE

- Kit 4 projectors 1x80W COB led RGBW
- LED lifespan: >50.000h
- LED refresh frequency: >400Hz flicker free

OPTIC SYSTEM

- Beam angle: 45°

COLOR SYSTEM

- LED source COB RGBW
- Infinite chromatic possibilities and colour temperature control

EFFECTS

- Linear Dimmer 0-100%
- Electronic strobe: 1-20 flashes/s with adjustable speed
- Auto mode can be recalled by DMX

CONTROL AND PROGRAMMING

- 5 DMX configurations available: 4/6/10/16/18 channels
- Each projector can be controlled independently
- Protocol USITT DMX 512
- Master / Slave mode
- Sound mode with adjustable mic sensitivity
- Automatic mode with 6 different programs selectable from the display or footswitch with independent adjustment of the speed
- Color mode with 9 different pre-programmed color macros
- Footswitch control included: Blackout, Sound, Auto, Freeze

STRUCTURE AND CABINET


- Metal housing, black color
- Red LED display
- Mounting points: double adjustable bracket
- "Light up" positioning
- 3-poles XLR in/out connection
- IP rating: IP 20
- Stand max. H 2800 mm with bag for transport included
- Semi rigid bag for bar transport included

POWER SUPPLY

- Input Voltage: AC~100-240V 50/60Hz
- Switching power supply unit
- Max power: 350W @ 230VAC
- Power IN/OUT connection with VDE socket
- Power supply cable 1,5 mt included
- Max 2 pcs linkable @240V

WEIGHT AND DIMENSIONS:

- Bar Net weight: 9,5 kg
- Stand Net weight: 4,5 kg
- BAR DIMENSIONS: 1180X90X270 MM

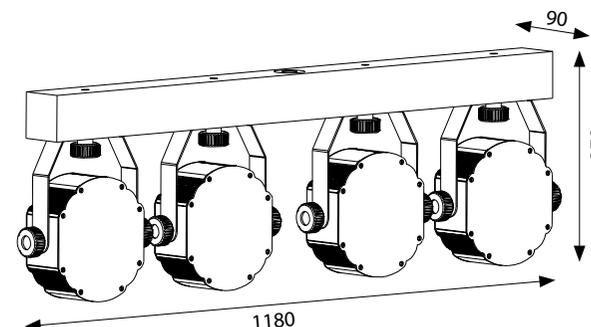

LED KITS
LED KIT 7 COB



CONTROLLERS



CONTROLLERS FASTER 192

SG FASTER192N - PRODUCT CODE

TECHNICAL DATA


- DMX controller
- Max 12 projectors, 16 channel each
- Total 192 DMX channels
- 8 sliders for control (page A/B)
- 8 programmable scenes in 30 banks
- 6 chases
- Auto mode
- Sound mode (internal microphone)

POWER SUPPLY

- Input Voltage: DC 12V, 300 mA min
- External adapter included: AC~100-240V, 50/60Hz

WEIGHT AND DIMENSIONS:

- Net weight: 2,5 kg
- Dimensions: 482x132x80 mm

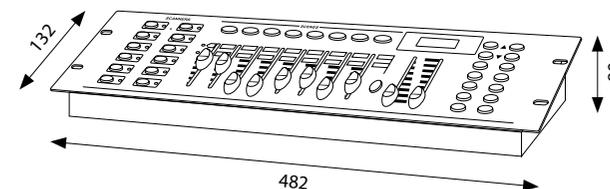



CONTROLLERS FASTER 384



SG FASTER384 - PRODUCT CODE

TECHNICAL DATA


- DMX controller
- Max 12 projectors, 32 channels each
- Total 384 DMX channels
- 8 sliders for control (page A/B)
- 8 programmable scenes in 30 banks
- 6 chases
- Auto mode
- Sound mode (internal microphone)

POWER SUPPLY

- Input Voltage: DC 12V, 300 mA min
- External adapter included: AC~100-240V, 50/60Hz

WEIGHT AND DIMENSIONS

- Net weight: 2,5 kg
- Dimensions: 482x132x80 mm

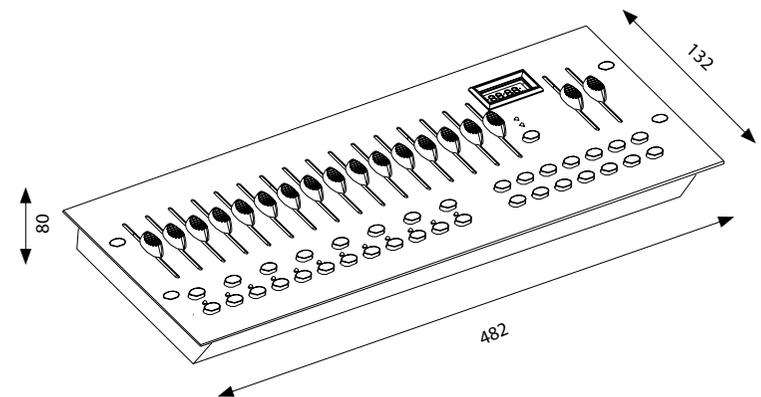



SG FASTER1224 - PRODUCT CODE

TECHNICAL DATA

- Controller for traditional projectors
- 24 DMX channels in total
- 24 control sliders
- 4 pages for 12 programs (up to 4.600 programmable steps)
- Fader setting and high speed execution for every single scene
- Possibility of edit a scene live or deferred
- Music mode (internal microphone)
- Compatible MIDI IN / OUT
- DMX polarity selector
- Sound-activated: Input audio


POWER SUPPLY

- Input Voltage: DC 12V, 500mA min
- External adapter included AC~100-240V, 50/60Hz

WEIGHT AND DIMENSION


- Net weight: 4,4 kg
- Dimensions: 482x266x95 mm

**CONTROLLERS
FASTER 12/24**

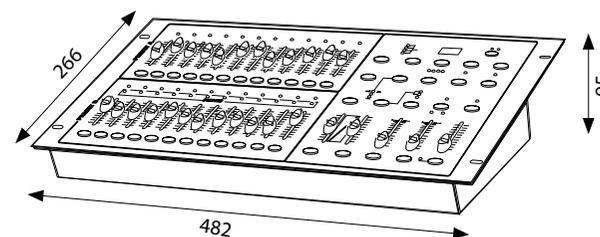



CONTROLLERS FASTER 24/48

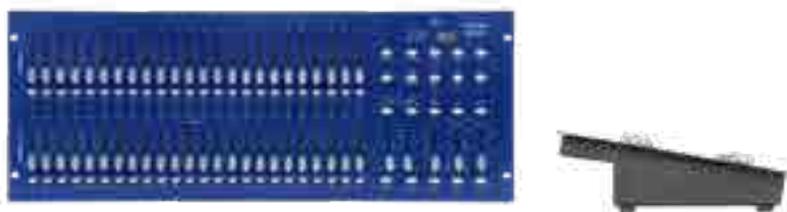

SG FASTER2448 - PRODUCT CODE

TECHNICAL DATA


- Controller for traditional projectors
- 48 DMX channels in total
- 48 control sliders
- 4 pages for 12 programs (up to 4.600 programmable steps)
- Fader setting and high speed execution for every single scene
- Possibility of edit a scene live or deferred
- Music mode (internal microphone)
- Compatible MIDI IN / OUT
- DMX polarity selector
- Sound-activated: Input audio

POWER SUPPLY

- Input Voltage: DC 12V, 500mA min
- External adapter included AC~100-240V, 50/60Hz

WEIGHT AND DIMENSION

- Net weight: 4,4 kg
- Dimensions: 482x266x95 mm

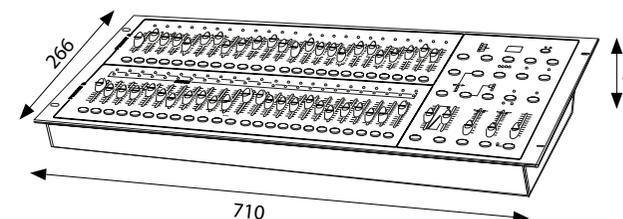



SG FASTER SP4 - PRODUCT CODE

TECHNICAL DATA


- 1 input - 4 output DMX512
- Output for connection to another distributor
- IN/OUT XLR 3-poles connection
- 1U standard rack 19"

POWER SUPPLY

- AC~100-240V - 50/60Hz

WEIGHT AND DIMENSIONS

- Net weight: 3,0 kg
- Dimensions: 482x45x130 mm

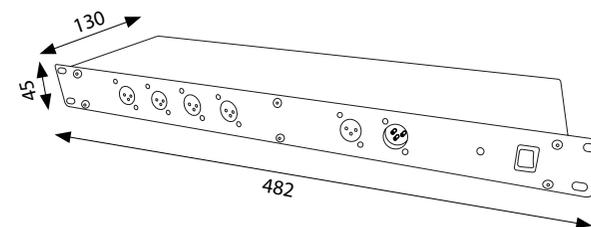

**CONTROLLERS
FASTER SPLITTER**



AMBIENT EFFECTS



SG H300 - PRODUCT CODE

EFFECTS

- Hazer effect

CONTROL AND PROGRAMMING

- 1 DMX channel configuration: 2 channels
- Fan's speed adjustable via software and via DMX
- Protocol USITT DMX 512
- Radio remote controller included
- Automatic safety shutdown circuit for pump prevention in case of finished liquid in the circuit
- Heating time: 2 mins
- Smoke output: 1000cuft
- Continue output
- Manual mode adjustable via display

STRUCTURE AND CABINET


- Metal black housing
- Red LED display
- Comfortable handle for transportation
- Led indicator for heating and ready to smoke
- High performance pump for optimal emission
- High speed axial fan
- External tank: 1,2 litres
- 3-poles XLR in/out connection
- IP rating: IP20
- For a correct operation we recommend to use Sagitter fluids

POWER SUPPLY

- Input Voltage: AC~230V 50Hz
- Max power: 650 W @ 230VAC
- IN power connection with VDE sockets
- Power supply cable 1,5 mt included

WEIGHT AND DIMENSIONS

- Net weight: 8 kg
- Dimensions: 235x355x200 mm

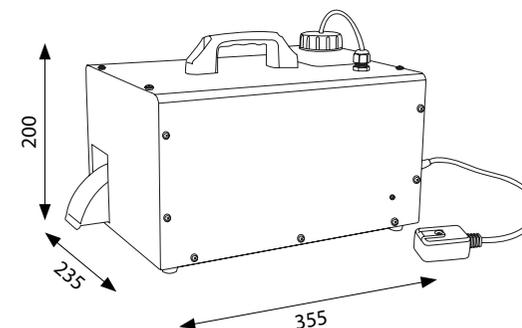



AMBIENT EFFECTS HYBRID H-900



SG HYH900 - PRODUCT CODE

EFFECTS

- Hazer/smoke effect

CONTROL AND PROGRAMMING

- 1 DMX channels configuration: 2 channels
- Fan's speed adjustable via software and via DMX
- Protocol USITT DMX 512
- Heating time: 5 mins
- Continue output
- Manual mode adjustable via display

STRUCTURE AND CABINET


- Metal black housing
- LCD blue graphic display
- Comfortable handle for transportation
- High performance pump for optimal emission
- High speed axial fan
- External tank: 2 litres
- 3/5 poles XLR in/out connection
- IP rating: IP20
- For a correct operation we recommend to use Sagitter fluids

POWER SUPPLY

- Input Voltage: AC~230V 50Hz
- Max power: 900W @ 230VAC
- IN power connection with VDE sockets
- Power supply cable 1,5 mt included

WEIGHT AND DIMENSIONS

- Net weight: 10,4 kg
- Dimensions: 425x480x330 mm

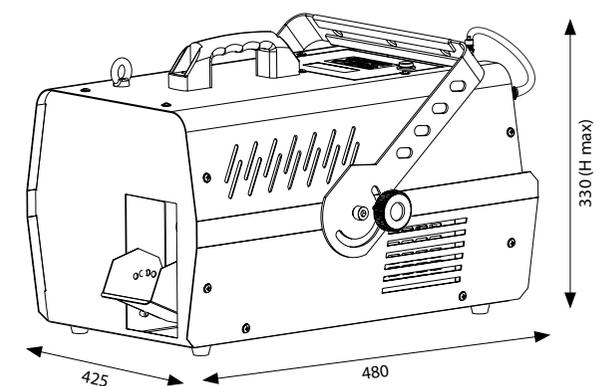



SG MIMETIKS - PRODUCT CODE

EFFECTS

- Smoke effect

CONTROL AND PROGRAMMING

- Wired remote controller
- Heating time: 6 min
- Continue output time: 20 sec.

STRUCTURE AND CABINET

- Metal housing
- Adjustable bracket
- indicator for ready to smoke
- High performance pump for long-range
- External tank: 0,25 litres
- IP rating: IP20
- For a correct operation we recommend to use Sagitter fluids


POWER SUPPLY

- Input Voltage: AC~230V, 50 Hz
- Max power: 400W @ 230VAC

WEIGHT AND DIMENSIONS

- Net weight: 2,4 kg
- Dimensions: 110x235x130 mm

AMBIENT EFFECTS
MIMETIK SMALL

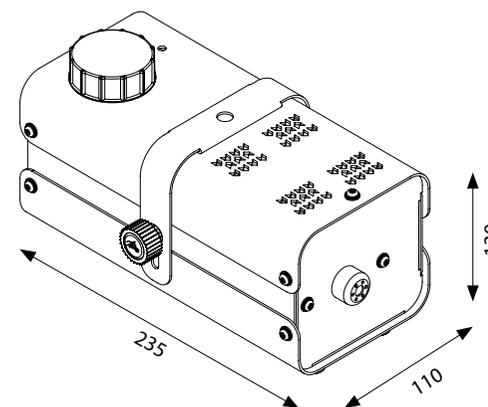



AMBIENT EFFECTS MIMETIK MEDIUM



SG MIMETIKM - PRODUCT CODE

EFFECTS

- Smoke effect

CONTROL AND PROGRAMMING

- Radio remote controller included
- Wired remote controller with built-in timer
- Heating time: 5 min
- Continue output time: 20 sec.

STRUCTURE AND CABINET


- Metal housing
- Adjustable bracket
- Led indicator for heating and ready to smoke
- High performance pump for long-range
- External tank: 0,9 litres
- IP rating: IP20
- For a correct operation we recommend to use Sagitter fluids

POWER SUPPLY

- Input Voltage: AC~230V, 50 Hz
- Max power: 900W @ 230VAC

WEIGHT AND DIMENSIONS

- Net weight: 4,5 kg
- Dimensions: 235x240x140 mm

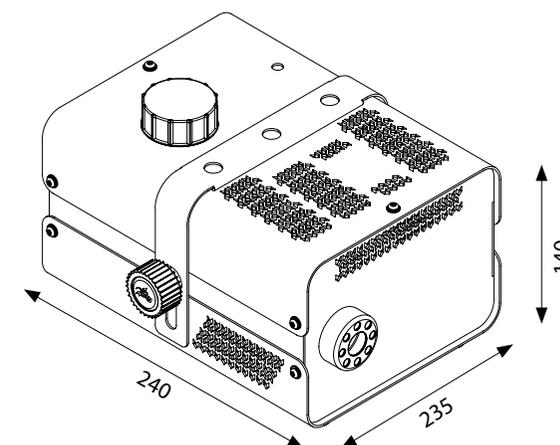

SG MIMETIKL - PRODUCT CODE

EFFECTS

- Smoke effect

CONTROL AND PROGRAMMING

- Radio remote controller included
- Wired remote controller
- Heating time: 6 min
- Continue output time: 20 sec.

STRUCTURE AND CABINET


- Metal housing
- Adjustable bracket
- Led indicator for ready to smoke
- High performance pump for long-range
- External tank: 0,9 litres
- IP rating: IP20
- For a correct operation we recommend to use Sagitter fluids

POWER SUPPLY

- Input Voltage: AC~230V, 50 Hz
- Max power: 1200W @ 230VAC

WEIGHT AND DIMENSIONS

- Net weight: 5,5 kg
- Dimensions: 260x380x140 mm

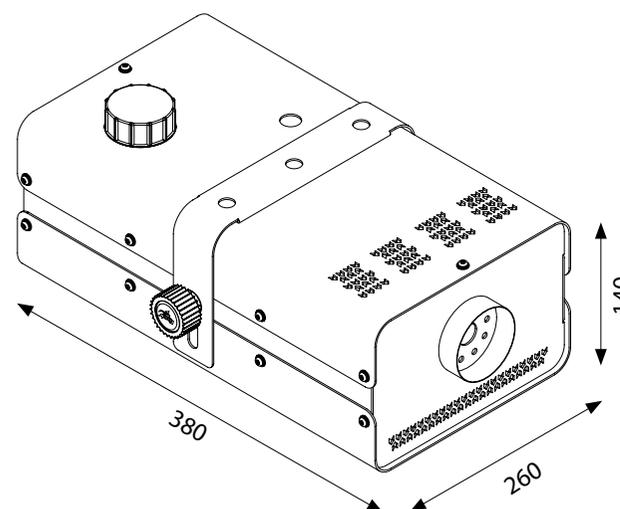



AMBIENT EFFECTS MIMETIK EXTRA LARGE



SG MIMETIKXL - PRODUCT CODE

EFFECTS

- Smoke effect

CONTROL AND PROGRAMMING

- Protocol USITT DMX 512
- Radio remote controller included
- Manual mode with specific button
- Heating time: 8 mins
- Continue output time: 10s

STRUCTURE AND CABINET


- Metal black/green housing
- Comfortable handle for transportation
- Red led indicator for heating and ready to smoke
- High performance pump for long-range
- External tank: 2,5 litres
- 3-poles XLR in/out connection
- IP rating: IP20
- For a correct operation we recommend to use Sagitter fluids

POWER SUPPLY

- Input Voltage: AC~230V 50Hz
- Max power: 1500W @ 230VAC
- IN power connection with VDE sockets
- Power supply cable 1,5 mt included

WEIGHT AND DIMENSIONS

- Net weight: 7,3 kg
- Dimensions: 190x440x305 mm

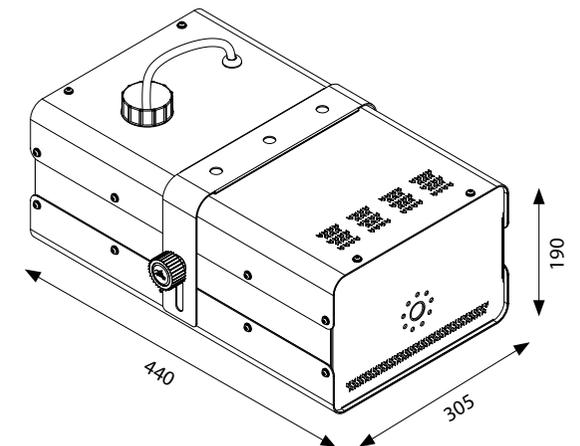

SG ARS1500FC - PRODUCT CODE

EFFECTS

- Smoke effect
- Geysier smoke effect 6 LED RGB full color

CONTROL AND PROGRAMMING

- 1 DMX configurations available: 7 channels
- Independent control smoke output and leds
- Protocol USITT DMX 512
- Radio remote controller included
- Auto mode with 7 pre-programmed colors
- Manual mode with specific button
- Automatic safety shutdown circuit for pump prevention in case of finished liquid in the circuit
- Heating time: 5 min
- Continue output time: 10 sec.

STRUCTURE AND CABINET


- Black metal housing
- Red LED display
- Comfortable handle for transportation
- Led indicator for heating and ready to smoke
- High performance pump for long-range
- Auxiliary pump for instant smoke stop
- Double working mode: horizontal and vertical
- External tank: 2,5 litres
- XLR 3/5-poles DMX IN/OUT connection
- IP rating: IP20
- For a correct operation we recommend to use Sagitter fluids

POWER SUPPLY

- Input Voltage: AC~230V, 50 Hz
- Max power: 1600W @ 230VAC
- Power supply cable 1 mt included

WEIGHT AND DIMENSIONS

- Net weight: 8,5 kg
- Dimensions: 415x358x225 mm

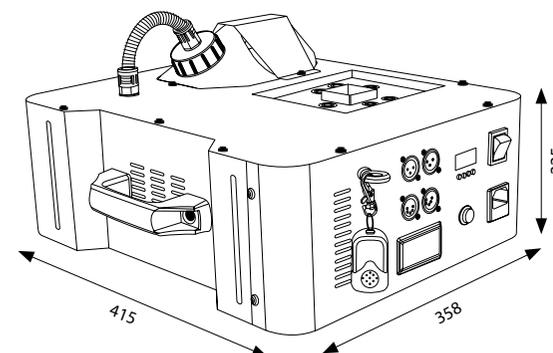

AMBIENT EFFECTS
COLOR SMOKE 1500FC



AMBIENT EFFECTS COLOR SMOKE 900FC



SG ARS900FC - PRODUCT CODE

EFFECTS

- Smoke effect
- Geyser smoke effect 6 LED RGB full color

CONTROL AND PROGRAMMING

- 1 DMX configurations available: 7 channels
- Independent control smoke output and leds
- Protocol USITT DMX 512
- Radio remote controller included
- Auto mode with 7 pre-programmed colors
- Manual mode with specific button
- Automatic safety shutdown circuit for pump prevention in case of finished liquid in the circuit
- Heating time: 5 min
- Continue output time: 10 sec.

STRUCTURE AND CABINET


- Black metal housing
- Red LED display
- Comfortable handle for transportation
- Led indicator for heating and ready to smoke
- High performance pump for long-range
- Auxiliary pump for instant smoke stop
- Double working mode: horizontal and vertical
- External tank: 2,5 litres
- XLR 3/5-poles DMX IN/OUT connection
- IP rating: IP20
- For a correct operation we recommend to use Sagitter fluids


POWER SUPPLY

- Input Voltage: AC~230V, 50 Hz
- Max power: 1600W @ 230VAC
- Power supply cable 1mt included

WEIGHT AND DIMENSIONS

- Net weight: 8,5 kg
- Dimensions: 415x358x225 mm

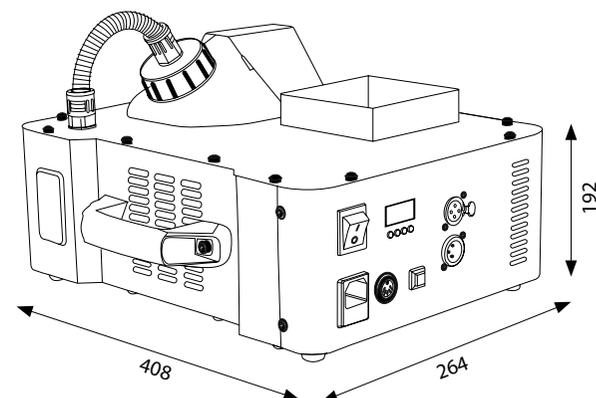

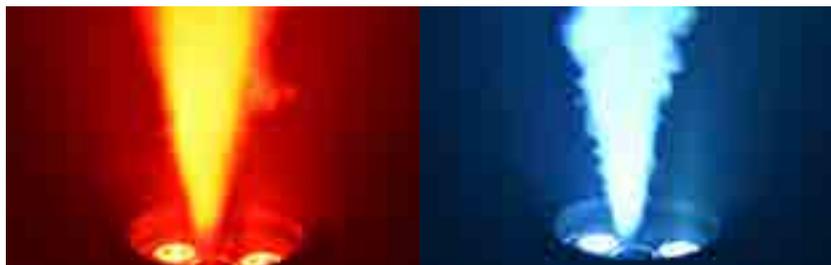

SG ARS900DJ - PRODUCT CODE

EFFECTS

- Smoke effect
- Geyser smoke effect 3 LED RGB full color

CONTROL AND PROGRAMMING

- Radio remote controller included
- Static color mode: 7 built-in colors
- Auto mode: 1 built-in color change program
- Manual mode with specific button
- Heating time: 8 min
- Continue output time: 10 sec.

STRUCTURE AND CABINET


- Black metal housing
- Comfortable handle for transportation
- Led indicator for heating and ready to smoke
- High performance pump for long-range
- Double working mode: horizontal and vertical
- External tank: 0,25 litres
- IP rating: IP20
- For a correct operation we recommend to use Sagitter fluids

POWER SUPPLY

- Input Voltage: AC~230V, 50 Hz
- Max power: 900W @ 230VAC
- Power supply cable 1mt included

WEIGHT AND DIMENSIONS

- Net weight: 3,5 kg
- Dimensions: 280x245x140 mm

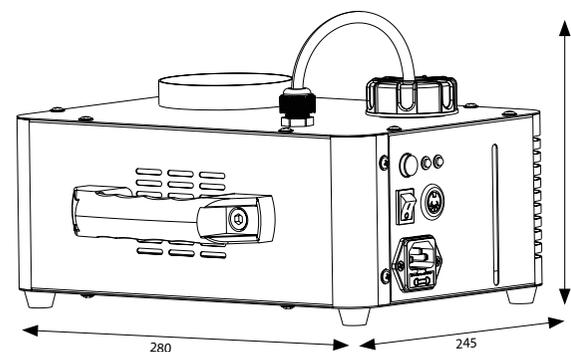

AMBIENT EFFECTS
COLOR SMOKE 900DJ



SAGITTER
genuine
ACCESSORIES



LIGHT

Light version, suitable for small environments and 'occasional' users who want to get a nice smoke effect minimizing the expenses. This version can also be used for those who need a fast fading effect. 5 liters tank

- SG SMKFLD5L



MEDIUM

Version that provides an adequate coverage and durability for any kind of show, suitable for any location, i.e. live events, theaters and nightclubs. 5 liters tank

- SG SMKFLD5M



HIGH DENSITY

Condensed version which guarantees a long durability and an adequate coverage for a professional and covering smoke effect. 5 liters tank

- SG SMKFLD5D



HAZER

Condensed version which guarantees a long durability and an adequate coverage for a professional and covering smoke effect. 5 liters tank

- SG HZRFLD5

| CODE | OSRAM | W | V | SOCKET | LIFETIME (H) | LM | PHILIPS | GE | NAED | ANSI | LIF |
|----------------------------|-------|------|-----|--------|--------------|--------|----------|---------------|--------------|------|-------|
| DOUBLE PLUG HALOGEN | | | | | | | | | | | |
| PLL300M38 | 64662 | 300 | 230 | GY9,5 | 2000 | 5000 | 6874P | M38-39785 | | | M/38 |
| PLL500M40 | 64672 | 500 | 230 | GY9,5 | 2000 | 8500 | 6877P | M40-39621 | | | M/40 |
| PLL1000T19 | 64744 | 1000 | 230 | GX9,5 | 750 | 20500 | 6996P | T19FWP-39657 | | FWP | T/19 |
| PLL200016 | 64788 | 2000 | 230 | GY16 | 400 | 52000 | 6994P | | | | CP/72 |
| PLL575HTC | 93728 | 575 | 230 | G9,5 | 300 | 14900 | | HPL575-37128 | 54618 | | |
| PLL750HTC | 93729 | 750 | 230 | G9,5 | 300 | 19750 | | HPL750-37824 | | | |
| PAR 36 | | | | | | | | | | | |
| PLLPP36V | | 30 | 6 | screw | 100 | 55000 | | 4515-24673 | | | |
| LLPDWE | | 650 | 120 | screw | 100 | 24000 | | DWE-41667 | | | |
| PAR 56 | | | | | | | | | | | |
| PLLPP56V | | 300 | 230 | GX16d | 2000 | 10000 | | | 300PAR56\NSP | | |
| PAR 64 | | | | | | | | | | | |
| PLLPP645V | | 500 | 230 | GX16d | 300 | | | CP87-30283 | | | CP/87 |
| PLLPP64A | | 1000 | 230 | GX16d | 300 | 320000 | PAR64NSP | CP60EXC-19909 | 56332 | EXC | CP/60 |
| PLLPP64B | | 1000 | 230 | GX16d | 300 | 270000 | PAR64SP | CP61EXD-19911 | 56233 | EXD | CP/61 |
| PLLPP64C | | 1000 | 230 | GX16d | 300 | 125000 | PAR64FL | CP62EXE-19913 | 56234 | EXE | CP/62 |
| PLL6428V | | 250 | 28 | screw | 25 | | | 4552-VNSP | | | |
| CODE | OSRAM | W | V | SOCKET | LIFETIME (H) | LM | PHILIPS | GE | NAED | ANSI | LIF |

Made in China

DISCHARGE HMI SERIES

PLLPHMI575CN HMI 575W/GS 575 VG Sfc 10-4 nd nd MSI 575W CSR575/DE

DISCHARGE HSD SERIES

PLLPHSD250CN HSD 250 250 VG GY9,5 nd nd MSD 250 CSD 250

DISCHARGE HSR/MSR SERIES

PLLPHSR575CN HSR 575/60 575 VG GX9,5 nd nd MSR 575 CSR 575

| CODE | OSRAM | W | V | SOCKET | LIFETIME (H) | LM | PHILIPS | GE | NAED | ANSI | LIF |
|-----------------------------------|---------------------|---------|----|-----------------|--------------|--------|-----------------------------------|------------|------|------|-----|
| WOOD TUBE | | | | | | | | | | | |
| PLL18W | | 18 | VG | G13 | 9000 | | TLD18W/08 | F20T12/BLB | | | |
| PLL36W | | 36 | VG | G13 | 20000 | | TLD36W/08 | F40T12/BLB | | | |
| STROBE HIGH POWER | | | | | | | | | | | |
| PLLXOP15N | | 1000 | VS | CAP15.8\14.7cab | 250 | 350000 | XOP15-OF | | | | |
| DISCHARGE HMI SERIES | | | | | | | | | | | |
| PLLPHMI575GS | HMI 575W/GS | 575 | VG | SFc 10-4 | 1000 | 49000 | MSI 575W | CSR575/DE | | | |
| PLLPHMI1200GS | HMI 1200W/GS | 1200 | VG | SFc 15,5-6 | 1000 | 110000 | MSI 1200W | CSR1200/DE | | | |
| DISCHARGE HSD SERIES | | | | | | | | | | | |
| PLLPHSD250 | HSD 250 | 250 | VG | GY9,5 | 2000 | 17000 | MSD 250 | | | | |
| DISCHARGE HSR/MSR SERIES | | | | | | | | | | | |
| PLLPHSR575 | HSR 575/60 | 575 | VG | GX9,5 | 1000 | 49000 | | | | | |
| PLLPMR1200SA | | 1200 | VG | GY22 | 750 | 96000 | MSR 1200SA | CSR1200SA | | | |
| DISCHARGE REFLECTOR SERIES | | | | | | | | | | | |
| SG LTUHP190W | | 190/160 | | 2 terminations | | | UHP 160/190W 0.9 E20.9 | | | | |
| SG LTUHP200W | | 200/170 | | 2 terminations | | | TOP UHP 200/170W | | | | |
| SG LTVIP280W | P-VIP 280/1.0 E20.6 | 280 | | 2 terminations | | | | | | | |
| SG PLHRI230 | SIRIUS HRI 230W | 230 | | 2 terminations | 2500 | | | | | | |
| SG PLHRI280 | SIRIUS HRI 280W | 280 | | 2 terminations | 2000 | | | | | | |
| SG PLHRI132 | SIRIUS HRI 132W | 132 | | 2 terminations | 6000 | | | | | | |
| SG PLHRI100 | SIRIUS HRI 100W | 100 | | 2 terminations | 6000 | | | | | | |
| DISCHARGE FastFit SERIES | | | | | | | | | | | |
| SG PL300LK | | 300 | | PGJX28 | 750 | 23000 | MSR Gold 300/2 Mini FastFit 1CT/4 | | | | |
| SG PL700LK | | 700 | | PGJX50 | 750 | 50000 | MSR Gold 700/2 FastFit 1CT/8 | | | | |
| SG PL700LK28 | | 700 | | PGJX28 | 750 | 47000 | MSR Gold 700/2 Mini FastFit 1CT/4 | | | | |

SAGITTER DMX CABLES



DMX CABLE 3 POLES

Professional DMX cable made in Italy with Neutrik connections series XX XLR 3 poles. Composition: 1x NC3FXXB 1x SG DMXBL 1x NC3MXXB. Cable color: Blue

- SG DMX3LU01 - 1 mt.
- SG DMX3LU02 - 2 mt.
- SG DMX3LU03 - 3 mt.
- SG DMX3LU05 - 5 mt.
- SG DMX3LU10 - 10 mt.

DMX CABLE 5 POLES

Professional DMX cable made in Italy with Neutrik connections series XX XLR 5 poles. Composition: 1x NC5FXXB 1x SG DMXBL 1x NC5MXXB. Cable color: Blue

- SG DMX5LU01 - 1 mt.
- SG DMX5LU02 - 2 mt.
- SG DMX5LU03 - 3 mt.
- SG DMX5LU05 - 5 mt.
- SG DMX5LU10 - 10 mt.



SDJ DMX CABLES



DMX CABLE 3 POLES

Professional DMX 512 cable with YONGSCHENG connectors XLR 3 poles. Cable color: Black

- SG DMX3CLU02 - 2 mt.
- SG DMX3CLU03 - 3 mt.
- SG DMX3CLU05 - 5 mt.
- SG DMX3CLU010 - 10 mt.



DMX CABLE 5 POLES

Professional DMX 512 cable with YONGSCHENG connectors XLR 5 poles. Cable color: Black

- SG DMX5CLU02 - 2 mt.
- SG DMX5CLU03 - 3 mt.
- SG DMX5CLU05 - 5 mt.
- SG DMX5CLU010 - 10 mt.



POWERCON EXTENSION CABLES

| | |
|-------------|--|
| SDC775LU015 | Powercon cable 3x2,5mm 1,5 mt |
| SDC775LU025 | Powercon cable 3x2,5mm 2,5 mt |
| SDC775LU05 | Powercon cable 3x2,5mm 5 mt |
| SDC775LU10 | Powercon cable 3x2,5mm 10 mt |
| SM300LU5 | Power cable mounth EC female socket - SCHIUKO 3x1mm 5mt |
| SM300LU10 | Power cable mounth EC female socket - SCHIUKO 3x1mm 10mt |
| SM300LU15 | Power cable mounth EC female socket - SCHIUKO 3x1mm 15mt |

IP DMX EXTENSION CABLES FOR IP LED SERIES

| | |
|-------------|-----------------------|
| SG IPCDLU03 | DMX cable IP 65 3 mt |
| SG IPCDLU5 | DMX cable IP 65 5 mt |
| SG IPCDLU10 | DMX cable IP 65 10 mt |

IP POWER EXTENSION CABLES FOR IP LED SERIES

| | |
|-------------|-------------------------|
| SG IPCPLU3 | Power cable IP 65 3 mt |
| SG IPCPLU5 | Power cable IP 65 5 mt |
| SG IPCPLU10 | Power cable IP 65 10 mt |

IP DMX/POWER EXTENSION CABLES FOR MICRO BAR LED SERIES

| | |
|--------------|---|
| SG IPCPDLU3 | Power/DMX cable IP 65 3 mt for IPLED MICRO BAR RGB |
| SG IPCPDLU5 | Power/DMX cable IP 65 5 mt for IPLED MICRO BAR RGB |
| SG IPCPDLU10 | Power/DMX cable IP 65 10 mt for IPLED MICRO BAR RGB |

SG CABLECRS2 - PRODUCT CODE

TECHNICAL DATA

- 2 channels cable cross
- Conduits for cable routing up to 30mm section
- Base made of thermoplastic polyurethane
- Closing panel: made of yellow PVC
- Capacity: ≤ 3000 kg (uniformly distributed load)
- Conduits measures: 1000x30x30 mm
- Platform measures: 1000x45x250 mm
- Weight: 4.0 kg



SG CABLECRS5 - PRODUCT CODE



TECHNICAL DATA

- 5 channels cable cross
- Conduits for cable routing up to 35mm section
- Base made of thermoplastic polyurethane
- Closing panel: made of yellow PVC
- Capacity: ≤ 4500 kg (uniformly distributed load)
- Conduits measures: 4x(1000x35x40 mm) / 1x(1000x40x40 mm)
- Platform measures: 1000x500x55 mm
- Weight: 9.0 kg





SG CABLECVR1S - PRODUCT CODE



TECHNICAL DATA

- 1 channels cable cross
- Conduits for cable routing up to 30mm section
- Cable cross made of thermoplastic polyurethane
- Capacity: ≤ 1000 kg (uniformly distributed load)
- Conduits measures: 1000x40x13 mm
- Platform measures: 1000x135x25 mm
- Weight: 2.0 kg

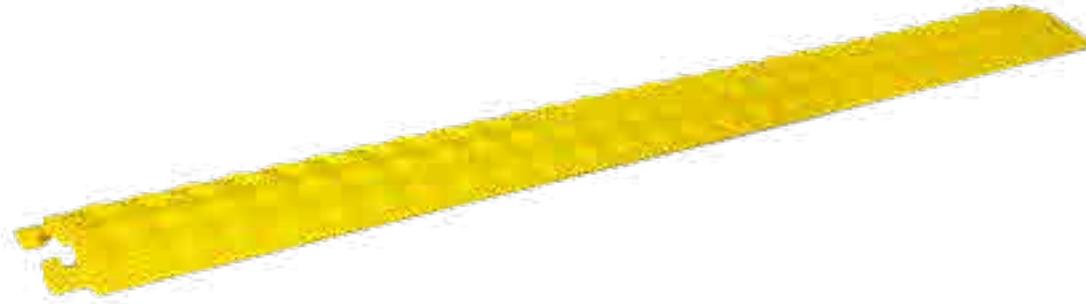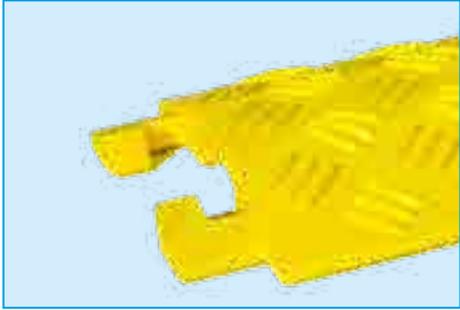

SG CABLECVR1XS - PRODUCT CODE



TECHNICAL DATA

- 1 channels cable cross
- Conduits for cable routing up to 6.4mm section
- Cable cross made of PVC and NBR
- Capacity: ≤ 200 kg (uniformly distributed load) per 9 mt.
- Conduits measures: 9000x19x9.5 mm
- Platform measures: 9000x77x16 mm
- Weight: 7.0 kg



ACCESSORIES CLAMPS



PLH290BK



Black Simple extruded aluminium coupler



PLH295BK



Black Simple extruded aluminium coupler



PLH10NBK



Black Galvanized steel hook clamp



PLH350BK



Black Simple extruded aluminium coupler



**PLH232
PLH248**



Security PVC covered galvanized stainless steel cable with snap hook.



PLH10N



Galvanized steel hook clamp



PLH270



Simple extruded aluminium coupler



PLH290



Simple extruded aluminium coupler



PLH295



Simple extruded aluminium coupler



PLH300



Simple extruded aluminium coupler



PLH340



Extruded aluminium trigger clamp.



PLH420


Adjustable galvanized steel truss bracket with double coupler.




PLATFORMS MODULA SERIES




MODH2X1

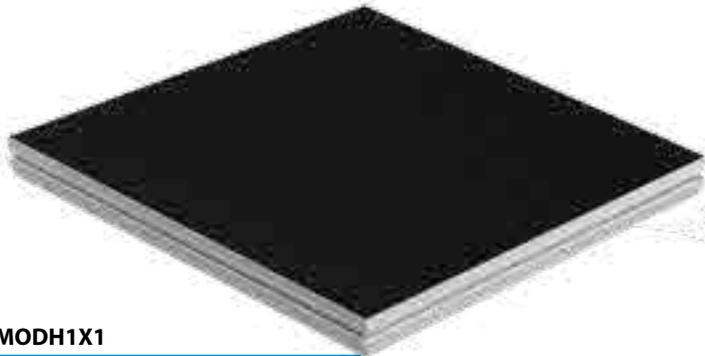

MODH1X1

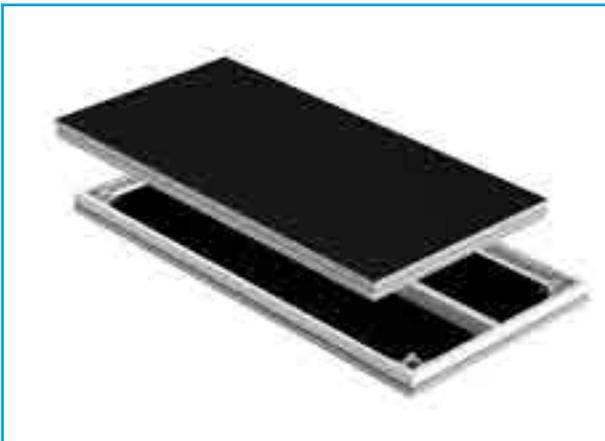

MODW2X1

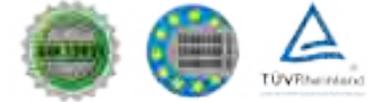

MODH2X1

Stage platform structure made by extruded aluminum and weather resistant plywood with slip coating HEXA surface. Supplied without legs. Dimension: 2000 x 1000 x 90 mm (WxDxH).

MODW2X1

Stage platform structure with same features of MODH2X1 but with natural wood surface. Supplied without legs. Dimension: 2000 x 1000 x 90 mm (WxDxH).

MODP2X1

Stage platform structure with same features of MODH2X1 but with transparent plexiglass surface. Supplied without legs. Dimension: 2000 x 1000 x 90 mm (WxDxH).

MODH1X1

Stage platform structure made by extruded aluminum and weather resistant plywood with slip coating HEXA surface. Supplied without legs. Dimension: 1000 x 1000 x 90 mm (WxDxH).

MODW1X1

Stage platform structure with same features of MODH2X1 but with natural wood surface. Supplied without legs. Dimension: 1000 x 1000 x 90 mm (WxDxH).

MODP1X1

Stage platform structure with same features of MODH2X1 but with transparent plexiglass surface. Supplied without legs. Dimension: 1000 x 1000 x 90 mm (WxDxH).

TECH INFO

| | |
|---------|---------------------|
| MODH2X1 | 32 Kg (70,55 lbs) |
| MODW2X1 | 32 Kg (70,55 lbs) |
| MODP2X1 | 45 Kg (99,20 lbs) |
| MODH1X1 | 17,5 Kg (38,58 lbs) |
| MODW1X1 | 17,5 Kg (38,58 lbs) |
| MODP1X1 | 22 Kg (48,50 lbs) |

• Loading Weight 750 Kg/m² - according to DIN 15921

MODTSL SERIES





Single telescopic leg, made of square extruded aluminum, available in two different heights. Refer to the technical table chart.

| * CODE | HEIGHT |
|----------|-------------|
| MODTSL40 | 40 – 60 cm |
| MODTSL60 | 60 – 100 cm |

MODFSL SERIES

Single fixed leg, made of square extruded aluminum, available in different heights. Refer to the technical table chart.

| CODE | HEIGHT |
|-----------|--------|
| MODFSL20 | 20 cm |
| MODFSL40 | 40 cm |
| MODFSL60 | 60 cm |
| MODFSL80 | 80 cm |
| MODFSL100 | 100 cm |

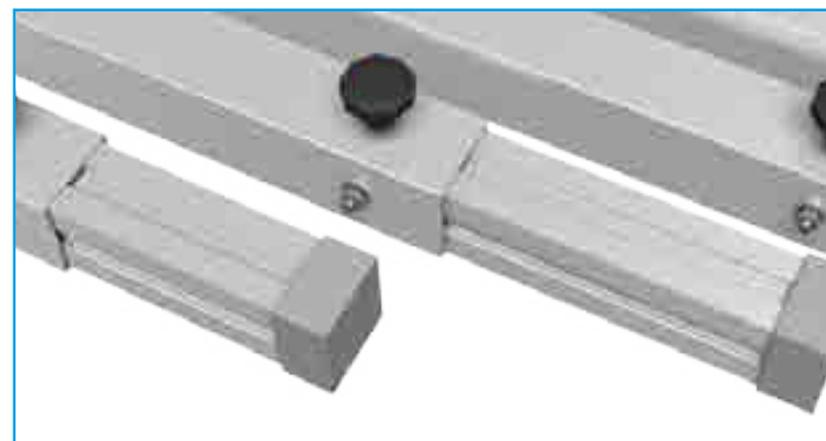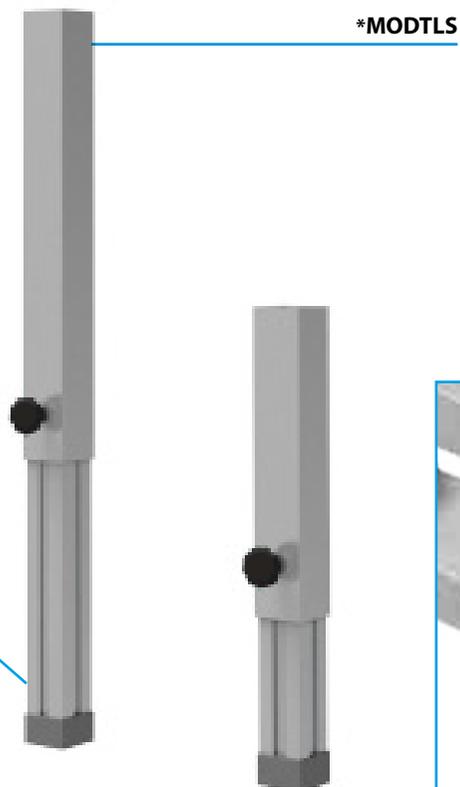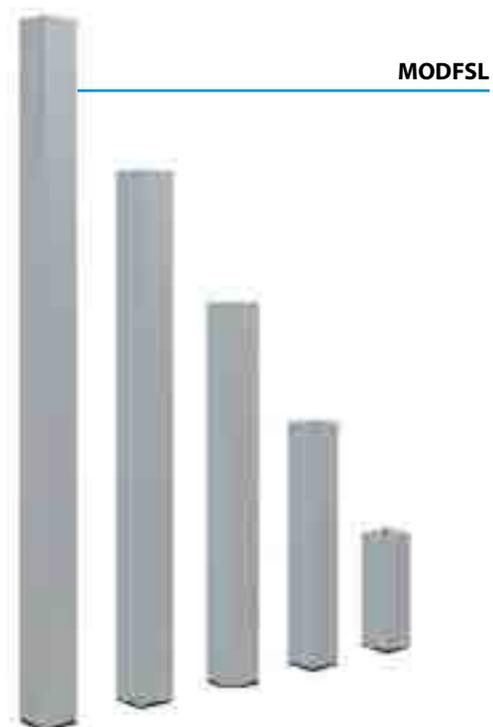

PLATFORMS
MODULA SERIES





MOD01DDC

Connection clamp to connect two adjacent platforms. It is recommended to use two clamps on the 2 meter side and one clamp for 1 meter side.

MOD04LL2

Steel clamp to connect two adjacent legs.

MOD04LL4

Steel clamp to connect four adjacent legs.

MOD02LEV

Aluminum insert to keep two adjacent platforms at the same level.



MOD01DDC



MOD04LL2



MOD04LL4



MOD02LEV



MODSTR SERIES


Steel step for modular stair, available in different heights. The steps can be used individually or together for different needs. Supplied with universal connection system to the platform.

| CODE | HEIGHT |
|----------|--------|
| MODSTR20 | 20 cm |
| MODSTR40 | 40 cm |
| MODSTR60 | 60 cm |
| MODSTR80 | 80 cm |

MODSTRHR

Steel handrail for modular stair, to be used with two adjacent steps of different heights.


MODSTRHR

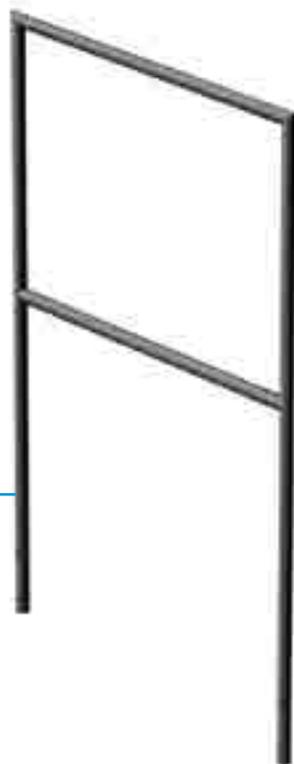

MODULAR STAIR EXAMPLE



MODULAR STAIR EXAMPLE

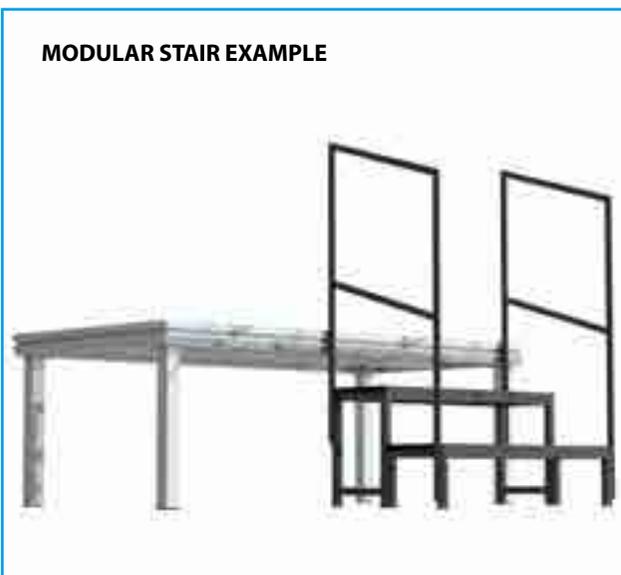

MODSTR20



MODSTR40





MODSTR60



MODSTR80



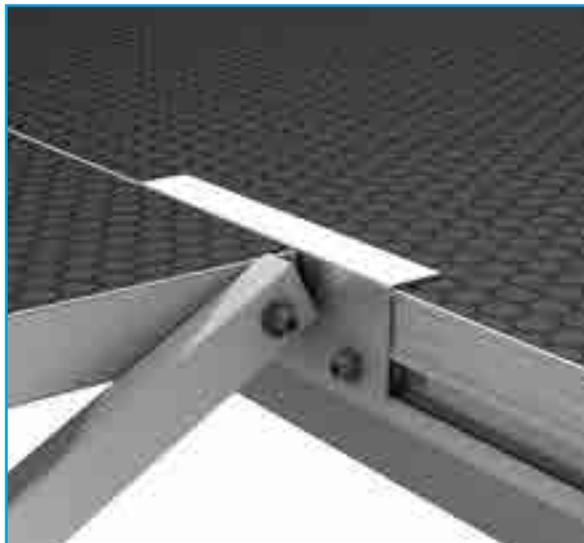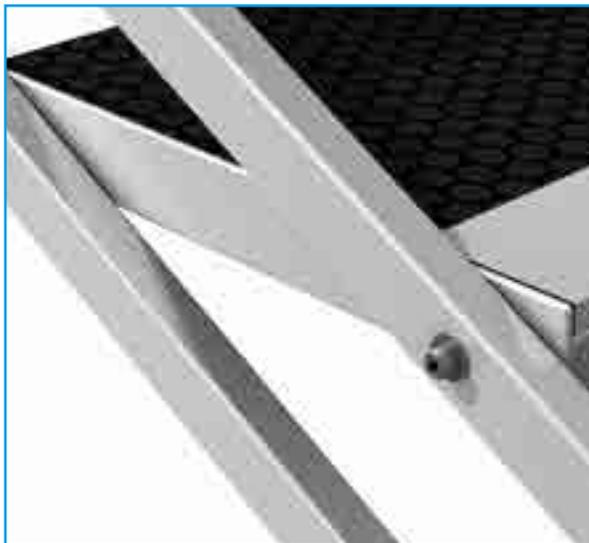

MODSTA40

Two steps stair, with adjustable height from 40 to 60 cm. For this model does not use the handrail.

MODSTA60

Four steps stair, with adjustable height from 60 to 100 cm.

MODSTAHR

Right side adjustable stair handrail, o be used with MODSTA60 only.


MODSTAHL

Right side adjustable stair handrail, o be used with MODSTA60 only.



ADJUSTABLE STAIR EXAMPLE

MODSTA40

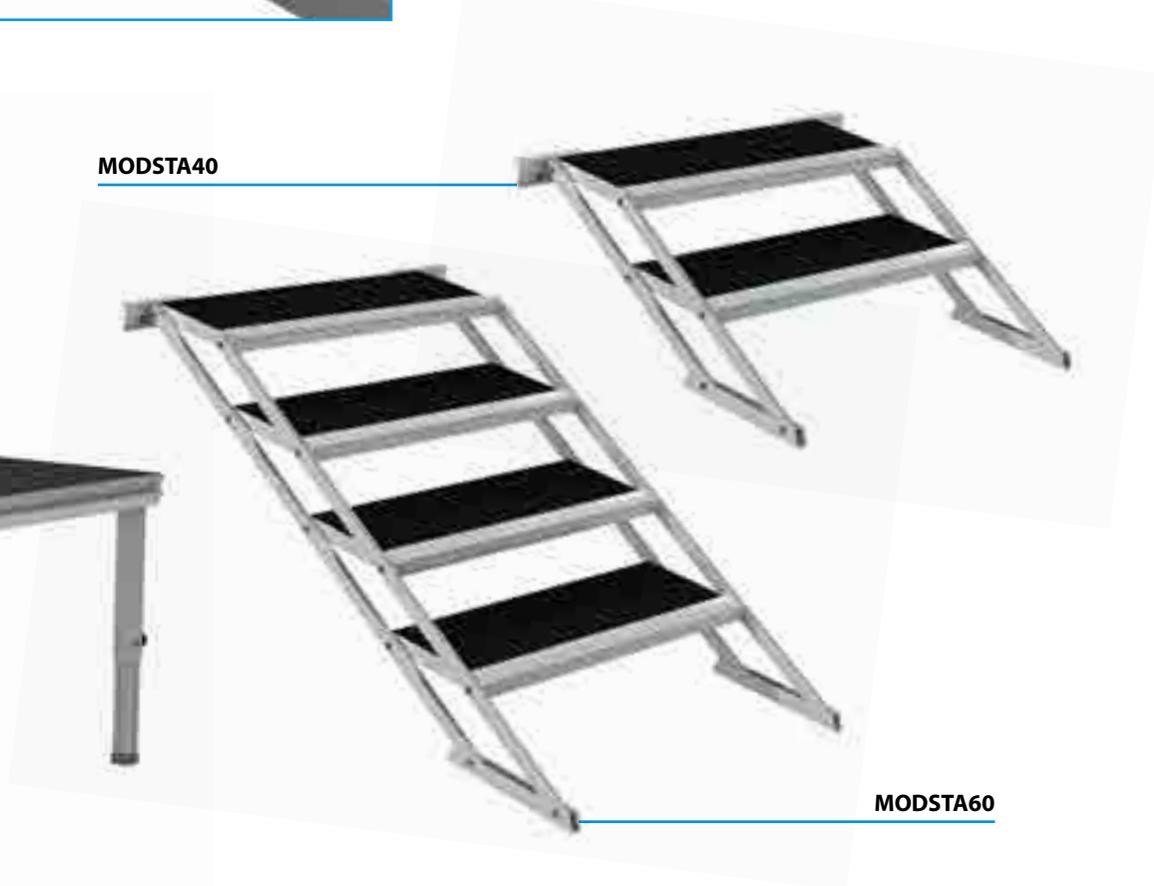

MODSTA60

MODHDR02

Two meter length galvanized steel handrail, for standard use on stage with no public access.

MODHDR01

One meter length galvanized steel handrail, for standard use on stage with no public access.

MODHDC1

Angular handrail connection.


MODHDC2

Straight handrail connection.



MODHDC2

MODHDR01

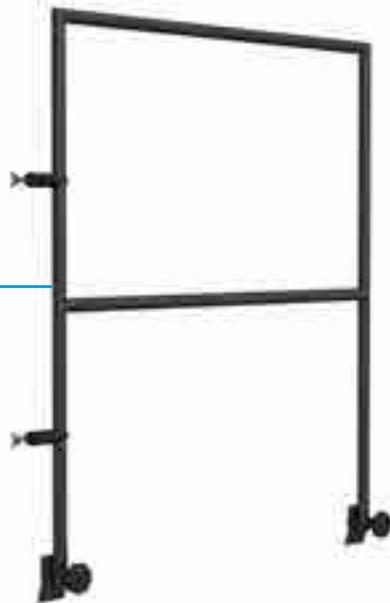

MODHDR02



| | |
|--------------------|--|
| SG CASESAGOLED | Flightcase with wheels for 4 SAGOLED |
| SG CASECLUB | Flightcase with wheels for 4 CLUB SERIES SPOT BEAM |
| SG CASEBLKARROW | Flightcase with wheels for 2 BLACKARROW |
| SG CASEHDBEAM | Flightcase with wheels for 2 HD BEAM |
| SG CASEPIXI5 | Flightcase with wheels for 6 PIXI5/SW |
| SG CASELTBEAM | Flightcase with wheels for 2 LITE BEAM |
| SG CASEACLBAR | Flightcase with wheels for 4 ACL LED BAR |
| SG CASESAGOLEDM | Flightcase for 4 SAGOLED MINI |
| SG CASESCLWASH | Flightcase with wheels for 4 CLUB WASH |
| SG CASEHTZ | Flightcase with wheels for 6 HTZ LED |
| SG CASEBATI4 | Flightcase with wheels for 8 BATI 4DL with battery charge system |
| SG CASEACLBAR7MX | Flightcase with wheels for 4 ACLBAR7MX |
| SG CASEPIKEONE | Flightcase with wheels for 2 PIKEONE |
| SG CASEPIKEONEX4 | Flightcase with wheels for 4 PIKEONE |
| SG CASEQUARTZ100 | Flightcase with wheels for 4 QUARTZ100 |
| SG CASEQUARTZ300 | Flightcase with wheels for 2 QUARTZ300 |
| SG CASEQUARTZ300X4 | Flightcase with wheels for 4 QUARTZ300 |
| SG CASECLDOTZ | Flightcase with wheels for 4 CLUB DOTZ |
| SG CASEHALOFM | Flightcase for 4 HALOFWWM60 |
| SG CASEHALOPR | Flightcase with wheels for 4 HALOPFWW 200 |
| SG CASEQUIVER | Flightcase for QUIVER |
| SG CASEQUIVER1X | Flightcase for QUIVER + 1 QUIVERX |
| SG CASEQUIVER2X | Flightcase for QUIVER + 2 QUIVERX |
| SG CASESLIMBAR16DL | Flightcase with wheels for 4 SLIMBAR16DL |
| SG CASESLIMBAR8DL | Flightcase with wheels for 6 SLIMBAR8DL |
| SG CASEPIXI5WL | Flightcase with wheels for 8 PIXI5WL |
| SG CASEHALOFR | Flightcase with wheels for 4 HALOFWW 100/200 |
| SG CASELTSPOT | Flightcase with wheels for 2 LITE SPOT |
| SG CASEGIUNO | Flightcase with wheels for 2 GIUNO SPOT |
| SG CASESTUDIOP | Flightcase with wheels for 4 STUDIO PANEL LED |
| SG CASESOLPAR60 | Flightcase with wheels for 6 SOLPAR 60 |
| SG CASESOLPAR150 | Flightcase with wheels for 4 SOLPAR 150 |
| SG CASEAQUPAR | Flightcase with wheels for 6 AQUPAR |
| SG CASEQUARIUX | Flightcase with wheels for 6 QUARIUX |
| SG CASESAGOLED300 | Flightcase with wheels for 4 SAGOLED 300 |
| SG CASEBLAZER | Flightcase with wheels for 2 BLAZER 1500 |

| CODE | DESCRIPTION | COMPATIBLE MODEL |
|-----------------|----------------------|------------------------------------|
| SG SOLPARC60BN | Directional barndoor | SG SOLPARC60Z |
| SG SOLPARC150BN | Directional barndoor | SG SOLPARC150Z |
| PLRB332 | Optics 19° | SG SAGOLEDW - SG SAGOLEDWW |
| PLRB98 | Optics 26° | SG SAGOLEDW - SG SAGOLEDWW |
| PLRB401 | Optics 36° | SG SAGOLEDW - SG SAGOLEDWW |
| PLRB335 | Optics 50° | SG SAGOLEDW - SG SAGOLEDWW |
| PLRB104 | Iris Accessory | SG SAGOLEDW - SG SAGOLEDWW |
| SG LENS19M | Optics 19° | SG SAGOLEDWWM - SG SAGOLEDWCWM |
| SG LENS26M | Optics 26° | SG SAGOLEDWWM - SG SAGOLEDWCWM |
| SG LENS36M | Optics 36° | SG SAGOLEDWWM - SG SAGOLEDWCWM |
| SG LENS50M | Optics 50° | SG SAGOLEDWWM - SG SAGOLEDWCWM |
| SG IRISM | Iris Accessory | SG SAGOLEDWWM - SG SAGOLEDWCWM |
| SG LENS19 | Optics 19° | SG SAGOLEDWW300 - SG SAGOLEDWCW300 |
| SG LENS26 | Optics 26° | SG SAGOLEDWW300 - SG SAGOLEDWCW300 |
| SG LENS36 | Optics 36° | SG SAGOLEDWW300 - SG SAGOLEDWCW300 |
| SG LENS50 | Optics 50° | SG SAGOLEDWW300 - SG SAGOLEDWCW300 |
| SG IRIS | Iris Accessory | SG SAGOLEDWW300 - SG SAGOLEDWCW300 |

| CODE | PAG |
|-----------|-----|
| MOD01DDC | 134 |
| MOD02LEV | 134 |
| MOD04LL2 | 134 |
| MOD04LL4 | 134 |
| MODFSL100 | 133 |
| MODFSL20 | 133 |
| MODFSL40 | 133 |
| MODFSL60 | 133 |
| MODFSL80 | 133 |
| MODH1X1 | 132 |
| MODH2X1 | 132 |
| MODHDR01 | 137 |
| MODHDR02 | 137 |
| MODHDRC1 | 137 |
| MODHDRC2 | 137 |
| MODP1X1 | 132 |
| MODP2X1 | 132 |
| MODSTA40 | 136 |
| MODSTA60 | 136 |
| MODSTahr | 136 |
| MODSTAHRL | 136 |
| MODSTR20 | 135 |

| CODE | PAG |
|------------|-----|
| MODSTR40 | 135 |
| MODSTR60 | 135 |
| MODSTR80 | 135 |
| MODTSL40 | 133 |
| MODTSL60 | 133 |
| MODW1X1 | 132 |
| MODW2X1 | 132 |
| PLH10N | 130 |
| PLH10NBK | 130 |
| PLH232 | 130 |
| PLH248 | 130 |
| PLH270 | 130 |
| PLH290 | 130 |
| PLH290BK | 130 |
| PLH295 | 130 |
| PLH295BK | 130 |
| PLH300 | 130 |
| PLH340 | 130 |
| PLH350BK | 130 |
| PLH420 | 130 |
| PLL1000T19 | 124 |
| PLL18W | 125 |

| CODE | PAG |
|---------------|-----|
| PLL200016 | 124 |
| PLL300M38 | 124 |
| PLL36W | 125 |
| PLL500M40 | 124 |
| PLL575HTC | 124 |
| PLL6428V | 124 |
| PLL750HTC | 124 |
| PLLPDWE | 124 |
| PLLPHMI1200GS | 125 |
| PLLPHMI575CN | 124 |
| PLLPHMI575GS | 125 |
| PLLPHSD250 | 125 |
| PLLPHSD250CN | 124 |
| PLLPHSR575 | 125 |
| PLLPHSR575CN | 124 |
| PLLPMSR1200SA | 125 |
| PLLP36V | 124 |
| PLLP56V | 124 |
| PLLP645V | 124 |
| PLLP64A | 124 |
| PLLP64B | 124 |
| PLLP64C | 124 |

| CODE | PAG |
|--------------|-----|
| PLLXP15N | 125 |
| PLRB104 | 139 |
| PLRB332 | 139 |
| PLRB335 | 139 |
| PLRB401 | 139 |
| PLRB98 | 139 |
| SDC775LU015 | 127 |
| SDC775LU025 | 127 |
| SDC775LU05 | 127 |
| SDC775LU10 | 127 |
| SG ACLBAR10 | 20 |
| SG ACLBAR5 | 21 |
| SG ACLBAR7MX | 19 |
| SG ACLPAR1 | 22 |
| SG AIRBOX | 53 |
| SG AQUPAR12 | 45 |
| SG AQUPAR18 | 46 |
| SG AQUPAR7 | 44 |
| SG ARS1500FC | 119 |
| SG ARS900DJ | 121 |
| SG ARS900FC | 120 |
| SG BAGBATI4 | 90 |

| CODE | PAG |
|------------------|---------------|
| SG BATI4DL | 90 |
| SG BATI4DLKIT | 90 |
| SG BATI4TX | 90 |
| SG BLAZER1500 | 42 |
| SG BLINDER2L | 86 |
| SG BLINDER4L | 87 |
| SG BLKARROW | 7 |
| SG BLKARROWKIT | 7 |
| SG BRAY8M | 72 |
| SG BRAY8P | 70 |
| SG BRAY8WP | 71 |
| SG CABLECRS2 | 128 |
| SG CABLECRS5 | 128 |
| SG CABLECVR1S | 129 |
| SG CABLECVR1XS | 129 |
| SG CASEACLBAR | 20 - 21 - 138 |
| SG CASEACLBAR7MX | 19 - 138 |
| SG CASEAQPAPAR | 44-45-46-138 |
| SG CASEBATI4 | 90 - 138 |
| SG CASEBLAZER | 42 - 138 |
| SG CASEBLKARROW | 7 - 138 |
| SG CASECLDOTZ | 138 |

| CODE | PAG |
|--------------------|---------------|
| SG CASECLUB | 65 - 66 - 138 |
| SG CASECLWASH | 68 |
| SG CASEDOTZ | 67 |
| SG CASEGIUNO300 | 13 - 138 |
| SG CASEHALOFM | 37 - 138 |
| SG CASEHALOFR | 35 - 36 - 138 |
| SG CASEHALOPR | 38 - 39 - 138 |
| SG CASEHDBEAM | 8 - 138 |
| SG CASEHTZ | 88 - 138 |
| SG CASELTBEAM | 9 - 10 - 138 |
| SG CASELTSPOT | 14 - 15 - 138 |
| SG CASEPIKEONE | 11 - 138 |
| SG CASEPIKEONEX4 | 138 |
| SG CASEPIXI5 | 97 - 98 - 138 |
| SG CASEPIXI5WL | 99 - 138 |
| SG CASEQUARIUX | 23 - 138 |
| SG CASEQUARTZ100 | 17 - 138 |
| SG CASEQUARTZ300 | 16 - 138 |
| SG CASEQUARTZ300X4 | 16 - 138 |
| SG CASEQUIVER | 55 - 138 |
| SG CASEQUIVER1X | 55 - 138 |
| SG CASEQUIVER2X | 55 - 138 |

| CODE | PAG |
|--------------------|---------------|
| SG CASESAGOLED | 33 - 138 |
| SG CASESAGOLED300 | 32 - 138 |
| SG CASESAGOLEDM | 34 - 138 |
| SG CASESCLWASH | 138 |
| SG CASESLIMBAR16DL | 92 - 94 - 138 |
| SG CASESLIMBAR8DL | 93 - 138 |
| SG CASESOLPAR150 | 49 - 138 |
| SG CASESOLPAR60 | 48 - 138 |
| SG CASESTUDIOP | 40 - 41 - 138 |
| SG CLBEAM100 | 66 |
| SG CLDOTZ | 67 |
| SG CLSPOT100 | 65 |
| SG CLWASH | 68 |
| SG CLWASHKIT | 68 |
| SG DMX3CLU010 | 126 |
| SG DMX3CLU02 | 126 |
| SG DMX3CLU03 | 126 |
| SG DMX3CLU05 | 126 |
| SG DMX3LU01 | 126 |
| SG DMX3LU02 | 126 |
| SG DMX3LU03 | 126 |
| SG DMX3LU05 | 126 |

| CODE | PAG |
|----------------|---------|
| SG DMX3LU10 | 126 |
| SG DMX5CLU010 | 126 |
| SG DMX5CLU02 | 126 |
| SG DMX5CLU03 | 126 |
| SG DMX5CLU05 | 126 |
| SG DMX5LU01 | 126 |
| SG DMX5LU02 | 126 |
| SG DMX5LU03 | 126 |
| SG DMX5LU05 | 126 |
| SG DMX5LU10 | 126 |
| SG FASTER1224 | 109 |
| SG FASTER192N | 107 |
| SG FASTER2448 | 110 |
| SG FASTER384 | 108 |
| SG FASTERSP4 | 111 |
| SG FLBATCHBOX | 51 - 52 |
| SG FLBATQ1 | 52 |
| SG FLBATQ3 | 51 |
| SG GIUNO300 | 13 |
| SG GIUNO300KIT | 13 |
| SG GIUNO300P | 13 |
| SG H1500 | 58 |

ALPHABETICAL INDEX

| CODE | PAG |
|----------------|-----|
| SG H300 | 113 |
| SG HALOFCW | 35 |
| SG HALOFCWM | 36 |
| SG HALOFCWM60 | 37 |
| SG HALOFWW | 35 |
| SG HALOFWWM | 36 |
| SG HALOFWWM60 | 37 |
| SG HALOPCW1528 | 38 |
| SG HALOPCW2045 | 39 |
| SG HALOPWW1528 | 38 |
| SG HALOPWW2045 | 39 |
| SG HDBEAM | 8 |
| SG HDBEAMKIT | 8 |
| SG HTZLEDC | 88 |
| SG HYH900 | 114 |
| SG HZRFLD5 | 123 |
| SG IPCDLU05 | 127 |
| SG IPCDLU10 | 127 |
| SG IPCDLU3 | 127 |
| SG IPCPDLU10 | 127 |
| SG IPCPDLU3 | 127 |
| SG IPCPDLU5 | 127 |

| CODE | PAG |
|--------------------|-----|
| SG IPCPLU10 | 127 |
| SG IPCPLU3 | 127 |
| SG IPCPLU5 | 127 |
| SG IPLED24C | 26 |
| SG IPLED40C | 25 |
| SG IPLED9C | 27 |
| SG IPLEDBAR12C | 28 |
| SG IPLEDBAR24C | 29 |
| SGIPLEDMC BAR54RGB | 30 |
| SG IPLEDMCBOX | 30 |
| SG IRIS | 139 |
| SG IRISM | 139 |
| SG LEDKITHP3BAT | 101 |
| SG LEDKITHP3C | 102 |
| SG LEDKITHP7 | 104 |
| SG LEDKITHP7BAT | 103 |
| SG LEDKITHPCOB | 105 |
| SG LENS19 | 139 |
| SG LENS19M | 139 |
| SG LENS26 | 139 |
| SG LENS26M | 139 |
| SG LENS36 | 139 |

| CODE | PAG |
|------------------|----------|
| SG LENS36M | 139 |
| SG LENS50 | 139 |
| SG LENS50M | 139 |
| SG LTBEAM10R | 9 |
| SG LTBEAM10RKIT | 9 |
| SG LTBEAM5R | 10 |
| SG LTBEAM5RKIT | 10 |
| SG LTSPOTR10Z | 14 |
| SG LTSPOTR10ZKIT | 14 |
| SG LTSPOTR5 | 15 |
| SG LTSPOTR5KIT | 15 |
| SG LTUHP190W | 10 - 125 |
| SG LTUHP200W | 125 |
| SG LTVIP280W | 9 - 125 |
| SG MIMETIKL | 117 |
| SG MIMETIKM | 116 |
| SG MIMETIKS | 115 |
| SG MIMETIKXL | 118 |
| SG PIKEONE1R | 11 |
| SG PIKEONE1RKIT4 | 11 |
| SG PIMEONE1RKIT | 11 |
| SG PIXIS | 97 |

| CODE | PAG |
|-----------------|----------|
| SG PIXI5W | 98 |
| SG PIXI5WL | 99 |
| SG PL300LK | 125 |
| SG PL700LK | 125 |
| SG PL700LK28 | 125 |
| SG PLHRI100 | 11 - 125 |
| SG PLHRI132 | 125 |
| SG PLHRI230 | 8 - 125 |
| SG PLHRI280 | 7 - 125 |
| SG QUARIUXCW | 23 |
| SG QUARIUXRGB | 23 |
| SG QUARIUXRGL | 23 |
| SG QUARIUXRGLZ | 23 |
| SG QUARIUXRGBW | 23 |
| SG QUARIUXRGBWZ | 23 |
| SG QUARIUXRGBZ | 23 |
| SG QUARIUXVW | 23 |
| SG QUARIUXWW | 23 |
| SG QUART300KIT | 16 |
| SG QUARTZ100 | 17 |
| SG QUARTZ300 | 16 |
| SG QUIVER | 55 |

| CODE | PAG |
|------------------|-----|
| SG QUIVERWI | 55 |
| SG QUIVERWI2 | 55 |
| SG QUIVERX | 56 |
| SG SAGOLEDWCW300 | 32 |
| SG SAGOLEDCWM | 34 |
| SG SAGOLEDW | 33 |
| SG SAGOLEDWW | 33 |
| SG SAGOLEDWW300 | 32 |
| SG SAGOLEDWWM | 34 |
| SG SLIMBAR12P | 92 |
| SG SLIMBAR16DL | 94 |
| SG SLIMBAR240 | 95 |
| SG SLIMBAR8DL | 93 |
| SG SLIMPAR12 | 76 |
| SG SLIMPAR12DL | 75 |
| SG SLIMPAR18 | 77 |
| SG SLIMPAR18C | 78 |
| SG SLIMPAR18CDL | 79 |
| SG SLIMPAR36C | 80 |
| SG SLIMPAR7DL | 74 |
| SG SLIMPARCOB100 | 84 |
| SG SLIMPARCOB30 | 82 |

| CODE | PAG |
|-----------------|-----|
| SG SLIMPARCOB60 | 83 |
| SG SLIMPARFLC | 81 |
| SG SMKFL5D | 123 |
| SG SMKFLD5L | 123 |
| SG SMKFLD5M | 123 |
| SG SMTSPOTPLUS | 64 |
| SG SMTWHPLUS | 63 |
| SG SOLPARC150BN | 139 |
| SG SOLPARC150Z | 49 |
| SG SOLPARC60BN | 139 |
| SG SOLPARC60Z | 48 |
| SG STUDIOPCW | 41 |
| SG STUDIOPRGB | 40 |
| SG STUDIOPPW | 41 |
| SM300LU10 | 127 |
| SM300LU15 | 127 |
| SM300LU5 | 127 |

SG CAT18E

SAGITTER

is a brand of

PROEL SPA
(Worldwide Headquarters)
Via alla Ruenia, 37/43
64027 Sant'Omero (TE) - ITALY
Tel. +39 0861 81241
Fax +39 0861 887862
P.I. 00778590679
N.Reg.AEE IT 08020000002762

sagitter.com

LIGHTING