



LIGHTING



INDEX

SAGITTER

- 4** Discharge Moving Heads
- 8** Led Moving Heads
- 12** Acl Leds
- 14** Architectural Leds
- 23** Stage Leds
- 38** Led Projectors
- 42** Cob Projectors
- 45** Led Battery Projectors
- 48** Controllers
- 51** Ambient Effects

SDJ

- 56** Moving Heads
- 65** Led Projectors
- 72** Stage Leds
- 76** Led Battery Projectors
- 78** Led Bars
- 87** Led Pixel
- 91** Led Kits
- 95** Controllers
- 103** Ambient Effects

genuine Accessories

- 112** Pro Fluids
- 113** Lamps
- 115** DMX Cables
- 116** Cables
- 117** Cablecross
- 119** Clamps
- 120** Flightcases
- 121** Accessories



DISCHARGE MOVING HEADS



DISCHARGE MOVING HEADS

ARCHER B10



NEW

SG ARCHERB10 - PRODUCT CODE

SG ARCHERB10KIT - KIT (2x SG ARCHERB10 + 1x SG CASEARCHERB10)

SG CASEARCHERB - CASE (2x SG ARCHERB10)

SORGENTE LUMINOSA

- Metal Halide Lamp Osram SIRIUS HRI 281W
- Color temperature: 7800K

OPTICS

- Projection angle zoom from 2,5 °
- Electronic focus
- Brightness: 39120 LUX@20m

COLOR SYSTEM

- Color wheel 11 dichroic filters + white (CTO – CTB)

EFFECTS

- Fixed gobo wheel with 16 static gobos (14 gobos + 2 beam reducers)
- Gobo scroll effects at variable speed
- Circular prism 8 facet with bidirectional rotation and indexable
- Linear prism 5 facet with bidirectional rotation and indexable
- Frost filter
- Linear dimmer from 0 to 100
- High speed strobe effect
- Random strobo effect

CONTROL AND PROGRAMMING

- 3 DMX configurations available: 15/16/18 channels
- Control signal USITT DMX512
- Wireless DMX by Wireless Solution ready (kit not included)
- Selectable 8/16bit Pan & Tilt resolution
- Function reset controlled by DMX control

STRUCTURE AND CABINET


- Metal internal structure with hi-resistance ABS cover
- High resolution LCD colour display
- Pan & Tilt three-phase motion motors
- Pan angle 540°
- Tilt angle 270°
- Mounting points 1 pairs of 1/4-turn locks omega older
- Automatic repositioning of Pan and Tilt
- Pan&Tilt movement lock system
- XLR 3-poles DMX IN/OUT connection
- IP rating 20
- Controlled cooling system

POWER SUPPLY

- Input Voltage: AC~100-240V 50/60Hz
- Switching power supply unit
- Max power: 330W @ 230VAC
- Power connection with TRUE ONE IN/OUT connectors

WEIGHT AND DIMENSIONS

- Net weight: 15 kg
- Dimensions: 307x494x220 (mm)

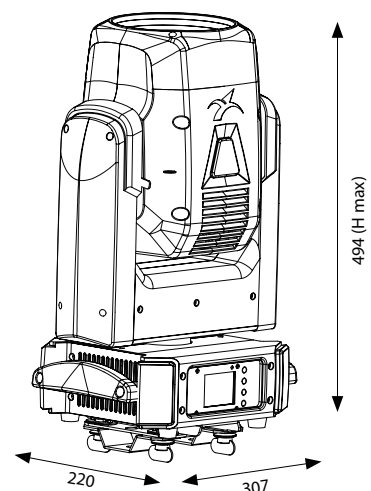

DISCHARGE MOVING HEADS

ARCHER B5



NEW



SG ARCHERB5 - PRODUCT CODE

SG ARCHERB5KIT - CASE (4x SG ARCHERB5 + 1x SG CASEARCHERB5)

SG CASEARCHERB - CASE (4x SG ARCHERB5)

LIGHT SOURCE

- Metal Halide Lamp Osram SIRIUS HRI 190W
- Color temperature: 8200K

OPTICS

- Projection angle zoom from 2,5 °
- Electronic focus
- Brightness: 39120 LUX@20m

COLOR SYSTEM

- Color wheel 11 dichroic filters + white (CTO – CTB)

EFFECTS

- Fixed gobo wheel with 16 static gobos (14 gobos + 2 beam reducers)
- Gobo scroll effects at variable speed
- Circular prism 8 facet with bidirectional rotation and indexable
- Linear prism 5 facet with bidirectional rotation and indexable
- Frost filter
- Linear dimmer from 0 to 100
- High speed strobe effect
- Random strobo effect

CONTROL AND PROGRAMMING

- 3 DMX configurations available: 15/16/18 channels
- Control signal USITT DMX512
- Wireless DMX by Wireless Solution ready (kit not included)
- Selectable 8/16bit Pan & Tilt resolution
- Function reset controlled by DMX control

STRUCTURE AND CABINET


- Metal internal structure with hi-resistance ABS cover
- High resolution LCD colour display
- Pan & Tilt three-phase motion motors
- Pan angle 540°
- Tilt angle 270°
- Mounting points 1 pairs of 1/4-turn locks omega older
- Automatic repositioning of Pan and Tilt
- Pan&Tilt movement lock system
- XLR 3-poles DMX IN/OUT connection
- IP rating 20
- Controlled cooling system

POWER SUPPLY

- Input Voltage: AC~100-240V 50/60Hz
- Switching power supply unit
- Max power: 230W @ 230VAC
- Power connection with TRUE ONE IN/OUT connectors

WEIGHT AND DIMENSIONS

- Net weight: 15 kg
- Dimensions: 307x494x220 (mm)

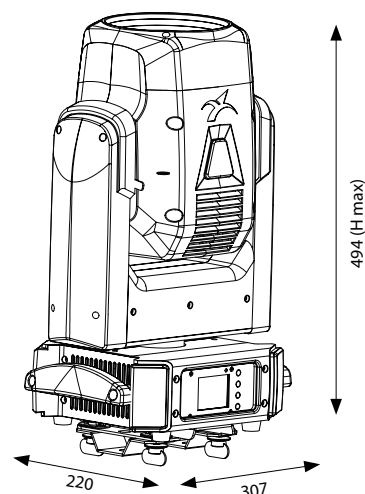



DISCHARGE MOVING HEADS

ARCHER B1



NEW

SG ARCHERB1 - PRODUCT CODE

SG ARCHERB1KIT - CASE (4x SG ARCHERB1 + 1x SG CASEARCHERB1)

SG CASEARCHERB1 - CASE (4x SG ARCHERB1)

LIGHT SOURCE

- Metal Halide Lamp Osram SIRIUS HRI 100W
- Color temperature: 9200K

OPTICS

- Projection angle zoom from 2,5 °
- Electronic focus
- Brightness: 40.000 LUX@10m

COLOR SYSTEM

- Color wheel 12 dichroic filters + white (CTO – CTB)

EFFECTS

- Fixed gobo wheel with 13 static gobos (9 gobos + 4 beam reducers)
- Gobo scroll effects at variable speed
- Circular prism 8 facet with bidirectional rotation and indexable
- Linear prism 5 facet with bidirectional rotation and indexable
- Frost filter
- Linear dimmer from 0 to 100
- High speed strobe effect
- Random strobo effect

CONTROL AND PROGRAMMING

- 2 DMX configurations available: 14/16 channels
- Control signal USITT DMX512
- Wireless DMX by Wireless Solution ready (kit not included)
- Selectable 8/16bit Pan & Tilt resolution
- Function reset controlled by DMX control

STRUCTURE AND CABINET


- Metal internal structure with hi-resistance ABS cover
- High resolution LCD colour display
- Pan angle 540°
- Tilt angle 270°
- Mounting points 1 pairs of 1/4-turn locks omega older
- Automatic repositioning of Pan and Tilt
- Pan&Tilt movement lock system
- XLR 3-poles DMX IN/OUT connection
- IP rating 20
- Controlled cooling system


POWER SUPPLY

- Input Voltage: AC~100-240V 50/60Hz
- Switching power supply unit
- Max power: 160W @ 230VAC
- Power connection with PowerCon IN/OUT connectors

WEIGHT AND DIMENSIONS

- Net weight: 9 kg
- Dimensions: 260x400x181 (mm)

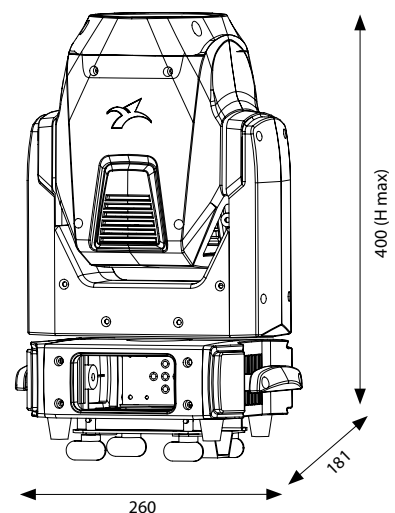

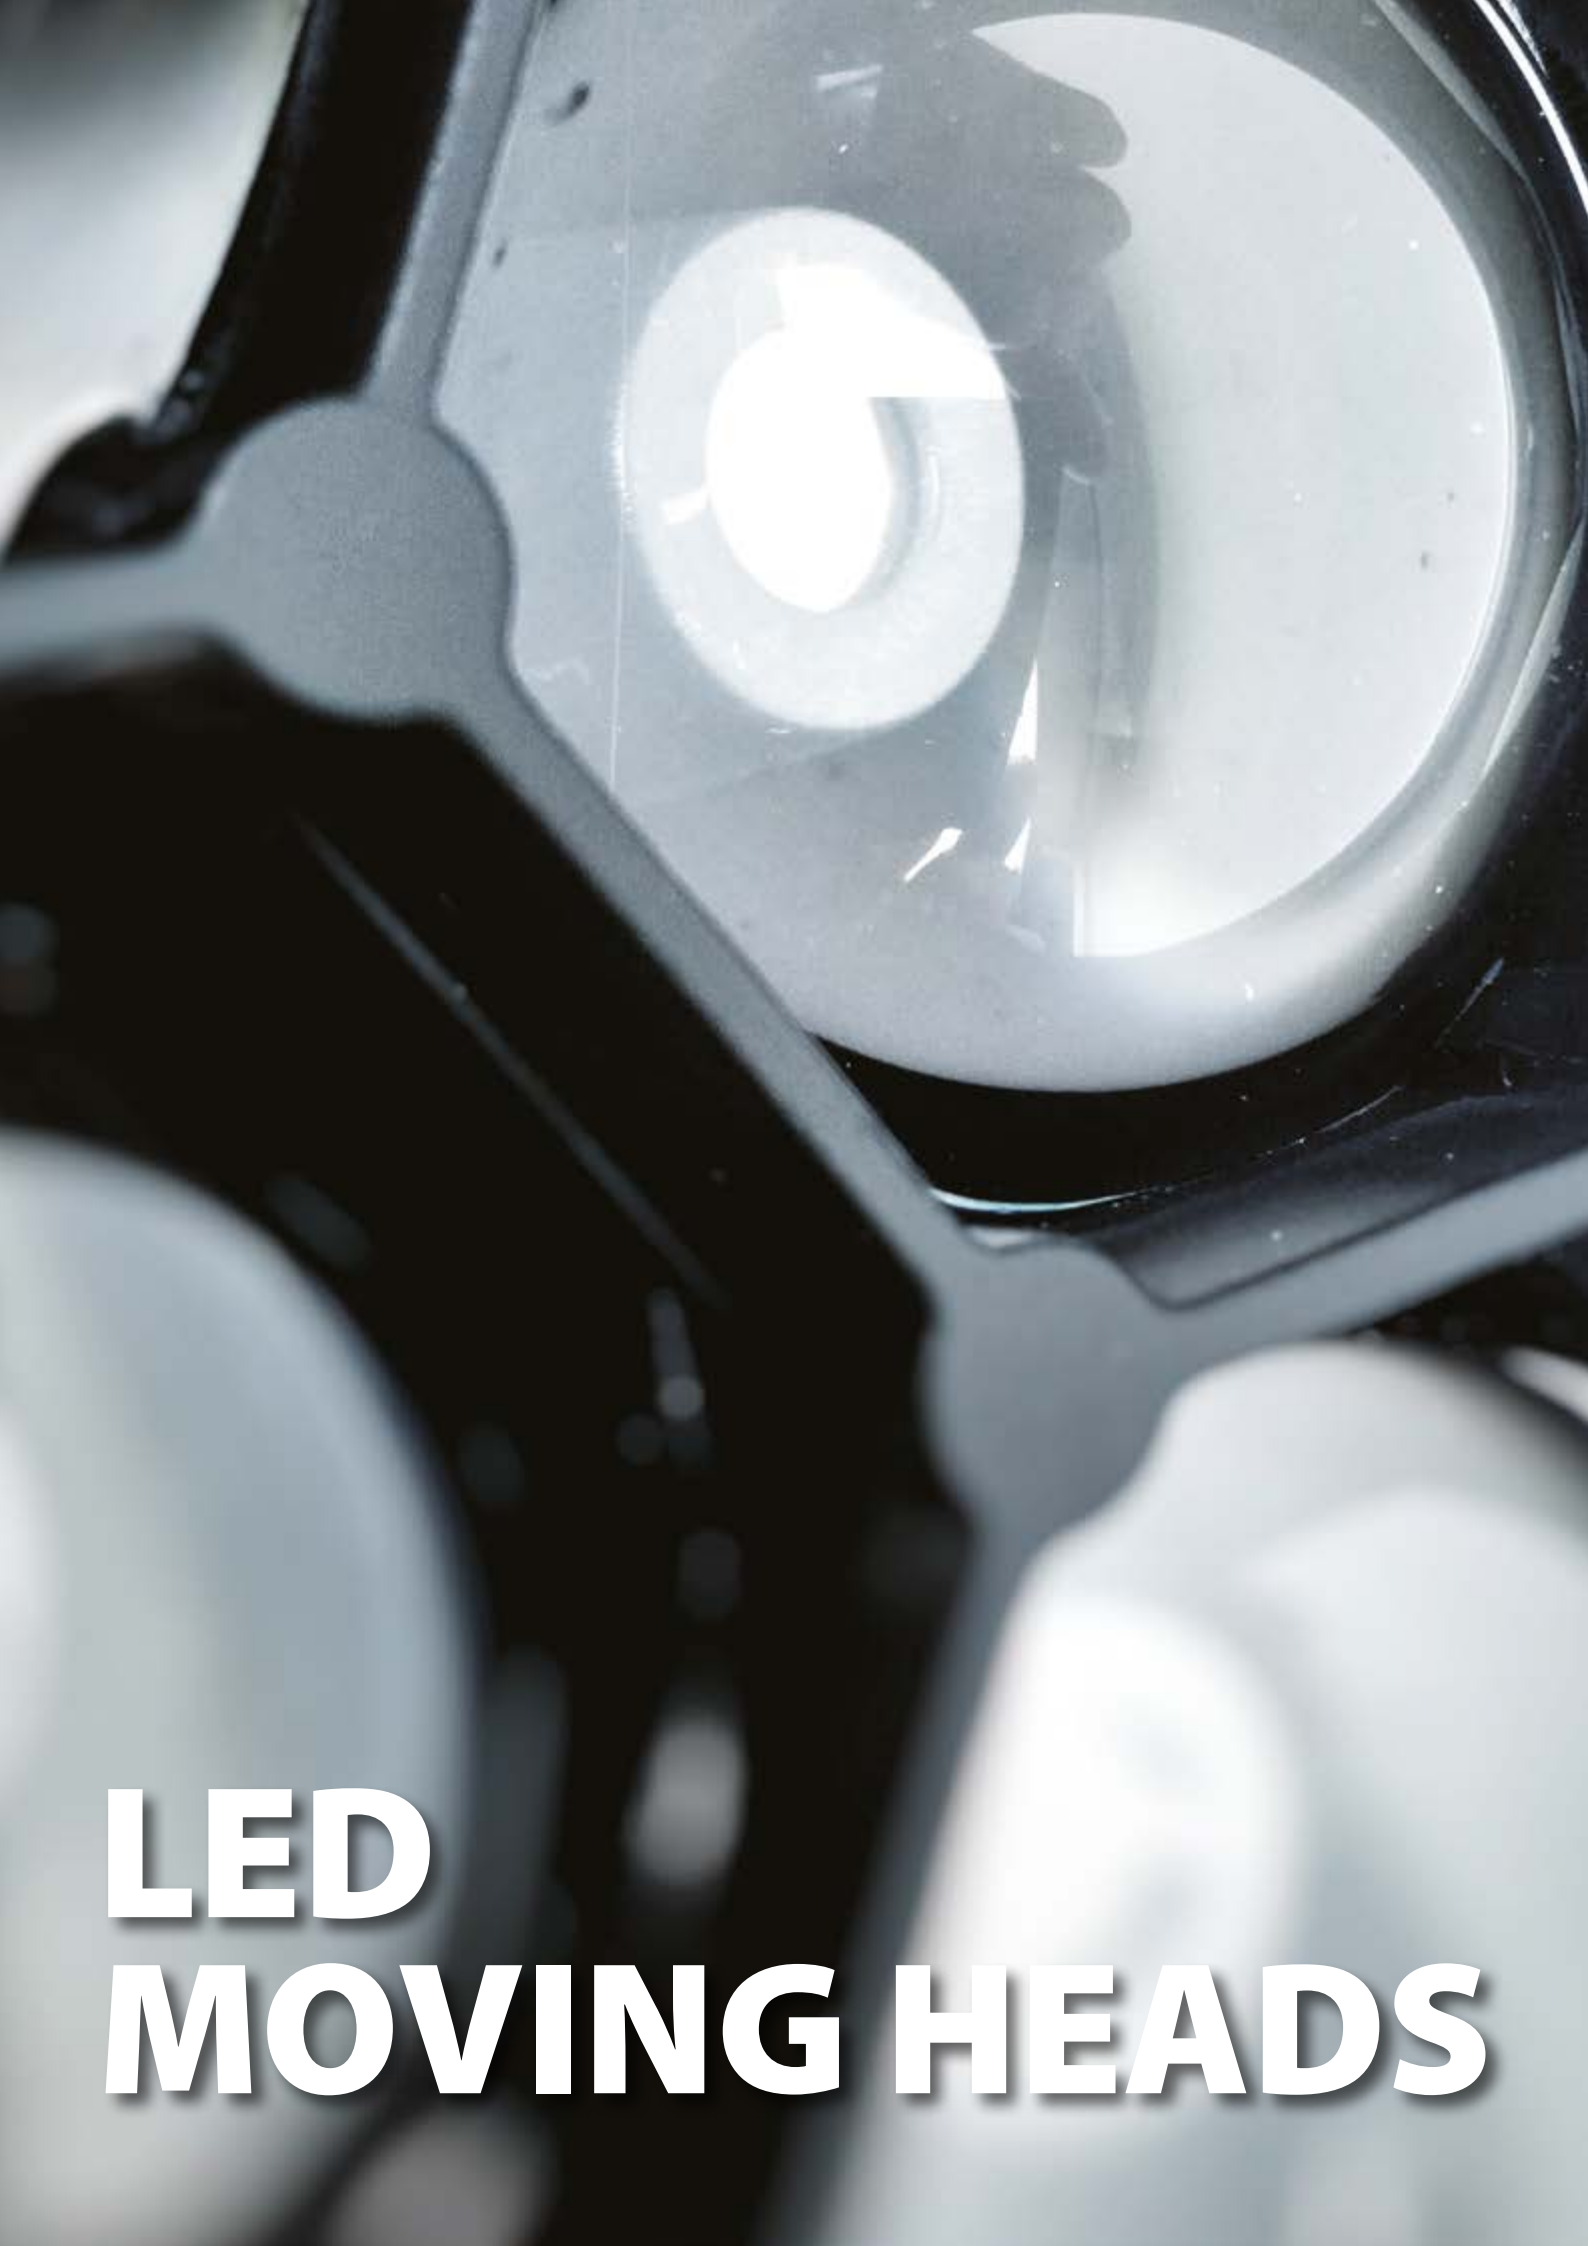

LED MOVING HEADS




LED MOVING HEADS

ARCHER S7



NEW

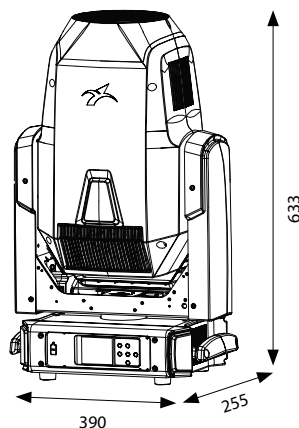

SG ARCHERS7 - PRODUCT CODE

SG ARCHERS7KIT KIT - (2x SG ARCHERS7 + 1x SG CASEARCHERS7)

SG CASEARCHERS7 - CASE (2x SG ARCHERS7)

LIGHT SOURCE

- 1x380W high brightness white led
- Color temperature: 6500K
- Led frequency adjustable up to 25.000 Hz

OPTICS

- Projection angle zoom from 7 ° to 43 °
- Electronic focus
- Brightness: 44600 LUX@5m (7° Min Zoom) - 1800 LUX@5m (43°Max Zoom)

COLOR SYSTEM

- CMY linear color mixing system
- CTO linear correction 6500-2700K
- Color wheel 7 dichroic filters + white

EFFECTS

- Fixed gobo wheel with 8 static and interchangeable gobos
- Rotating gobos wheel with 7 rotating gobos, interchangeable and indexable
- Gobo scroll effects at variable speed
- Animation wheel with continuous and bidirectional rotation
- Circular prism 3 facet with bidirectional rotation and indexable
- Linear prism 5 facet with bidirectional rotation and indexable
- Motorized iris
- Linear frost filter
- Linear dimmer from 0 to 100
- Electronic shutter up to 25 Hz
- Random strobo effect and pulse dimmer with variable speed

CONTROL AND PROGRAMMING

- 3 DMX configurations available: 24/29/34 channels
- Control signal USITT DMX512, Art-Net
- Transceiver wireless DMX by Wireless Solution (integrated)
- Selectable 8/16bit Pan & Tilt resolution
- Selectable Master/Slave mode
- Function reset controlled by DMX control
- USB interface for software update

STRUCTURE AND CABINET

- Aluminum internal structure with hi-resistance ABS cover
- High resolution LCD colour display
- Pan & Tilt three-phase motion motors
- Pan angle 540°/630° selectable
- Tilt angle 270°
- Mounting points 1 pairs of 1/4-turn locks omega older
- Automatic repositioning of Pan and Tilt
- Pan&Tilt movement lock system
- XLR 3-poles DMX IN/OUT connection
- RJ45 EtherCON data connectors IN/OUT
- IP rating 20
- Low-noise controlled cooling system
- Backup battery for user menu access without connecting to the main power

POWER SUPPLY

- Input Voltage: AC~100-240V 50/60Hz
- Switching power supply unit
- Max power: 497W @ 230VAC
- Power connection with TRUE ONE IN/OUT connectors

WEIGHT AND DIMENSIONS

- Net weight: 25 kg
- Dimensions: 390x633x255 (mm)

LED MOVING HEADS

QUARTZ 300



SG QUARTZ300 - PRODUCT CODE

SG CASEQUARTZ300 - CASE (2X SG QUARTZ300)

SG CASEQUARTZ300X4 - CASE (4X SG QUARTZ300)

SG QUARTZ300KIT - KIT (2X SG QUARTZ300 + 1X SG CASEQUARTZ300)

LIGHT SOURCE

- 19x15W RGBW Full Color led
- LED lifespan: >50.000h
- Led refresh frequency: >400Hz anti-flicker

OPTIC SYSTEM

- Beam angle: motorized zoom from 8° to 62°
- Luminous flux: 8600Lux (5m – full ON – 8°) / 800Lux (5m – full ON – 62°)

COLOR SYSTEM

- RGBW full color mixing
- Infinite chromatic possibilities

EFFECTS

- Linear dimmer 0-100%
- Electronic high speed strobe from 1 to 20 flashes/s, adjustable speed
- Random strobe and pulse effect with adjustable speed
- Single Pixel control
- Color macros and Pixel macros selectable from dmx

CONTROL AND PROGRAMMING

- 3 different dmx configurations: 14/20/92 channels
- USITT DMX 512 protocol
- Pan&Tilt 8/16 bit resolution selectable
- Master/Slave mode
- Reset via dmx

STRUCTURE AND CABINET


- Metal housing and high resistance plastic covers, black color
- LCD graphic color display
- PAN 630°/540°/360° selection and TILT 270°/180°/90° selection
- Mounting points: 1 pair of ¼ turn lock omega holders
- Automatic Pan&Tilt repositioning after accidental movement
- DMX 3-poles XLR In/Out connections
- IP rating: IP20
- Forced air fan cooling system with electronic control

POWER SUPPLY

- Input Voltage: AC~100-240V 50/60Hz
- Switching power supply unit
- Max power: 350W @ 230VAC
- In/Out connection with Powercon sockets
- Power supply cable included

WEIGHT AND DIMENSIONS

- Net weight: 11,5 kg
- Dimensions: 420x205x450 mm

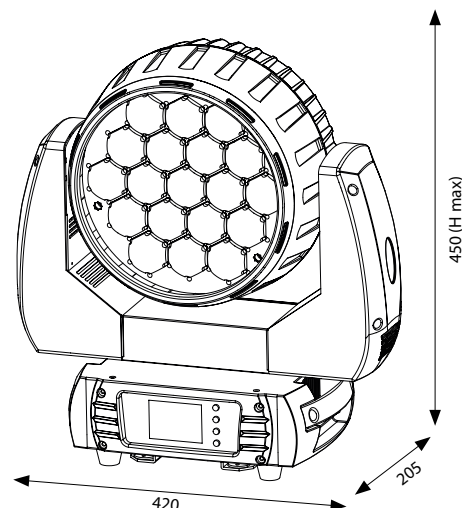



LED MOVING HEADS

QUARTZ 100



SG QUARTZ100 - PRODUCT CODE

SG CASEQUARTZ100 - CASE (4X SG QUARTZ100)

LIGHT SOURCE

- 7x15W RGBW Full Color led
- LED lifespan: >50.000h
- Led refresh frequency: >400Hz anti-flicker

OPTIC SYSTEM

- Beam angle: motorized zoom from 8° to 62°
- Luminous flux: 2167Lux (5m – full ON – 8°) / 154Lux (5m – full ON – 62°)

COLOR SYSTEM

- RGBW full color mixing
- Infinite chromatic possibilities

EFFECTS

- Linear dimmer 0-100%
- Electronic high speed strobe from 1 to 20 flashes/s, adjustable speed
- Random strobe and pulse effect with adjustable speed
- Single Pixel control
- Color macros and Pixel macros selectable from dmx

CONTROL AND PROGRAMMING

- 3 different dmx configurations: 14/20/44 channels
- USITT DMX 512 protocol
- Pan&Tilt 8/16 bit selectable resolution
- Master/Slave mode
- Reset via dmx

STRUCTURE AND CABINET


- Metal housing and high resistance plastic covers, black color
- LCD graphic color display
- PAN 630°/540°/2700° selection and TILT 270°/180°/90° selection
- Mounting points: 1 pair of 1/4 turn lock omega holders
- Automatic Pan&Tilt repositioning after accidental movement
- DMX 3-poles XLR In/Out connections
- IP rating: IP20
- Forced air fan cooling system with electronic control

POWER SUPPLY

- Input Voltage: AC~100-240V 50/60Hz
- Switching power supply unit
- Max power: 110W @ 230VAC
- In/Out connection with Powercon sockets
- Power supply cable included

WEIGHT AND DIMENSIONS

- Net weight: 6,2 kg
- Dimensions: 290x160x350 mm

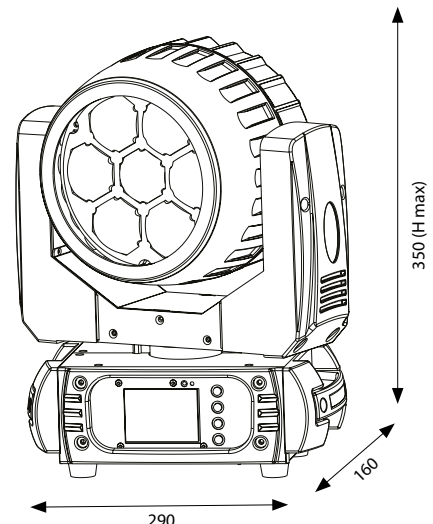



**ACL
LEDs**



SG ACLPARBATBKC - PRODUCT CODE BLACK VERION
SG ACLPARBATWHC - PRODUCT CODE WHITE VERION
SG ACLPARBAG - SOFT BAG (6X SG ACLPARBATBKC)
SG ACLPARCHR - CHARGER FOR 6X SG ACLPARBATBKC

LIGHT SOURCE

- 1x15W led RGBW Full Color
- LED lifespan: > 50,000h
- LED refresh frequency: > 400Hz anti flicker

OPTIC SYSTEM

- Beam Angle: 4°
- Luminous flux: 2300 lux @ 5m (full on max power)

COLOR SYSTEM

- LED source RGBW Full color
- Infinite chromatic possibilities

EFFECTS

- Linear dimmer 0-100%
- Adjustable strobe effect
- Color macros selectable via DMX
- Two removable frost filters included

CONTROL AND PROGRAMMING

- 4 DMX configurations available: 1/4/6/7 channels
- USITT DMX 512 protocol
- Built-in wireless DMX transceiver by Wireless Solution
- Master/Slave mode
- Auto mode with 3 different programs with adjustable strobe and speed
- Sound mode with adjustable sensitivity
- Remote controller included

STRUCTURE AND CABINET


- Die cast aluminium housing, black color
- Blue LCD graphic display
- "Light up" positioning with adjustable angle
- IP rating: IP20
- Convection cooling system without fans

POWER SUPPLY

- Input Voltage: 12-15VDC – 2A min, for normal working and battery recharge
- Max power: 24W
- Internal rechargeable battery: 11,1VDC
- Capacity: 2,6Ah
- Runtime battery: ~2/4/6/8h (Adjustable max power)
- Charging cycle: ~5h (Projector off)
- Power adapter included

WEIGHT AND DIMENSIONS

- Net weight: 1,2 kg
- Dimensions: 130x180x160 mm

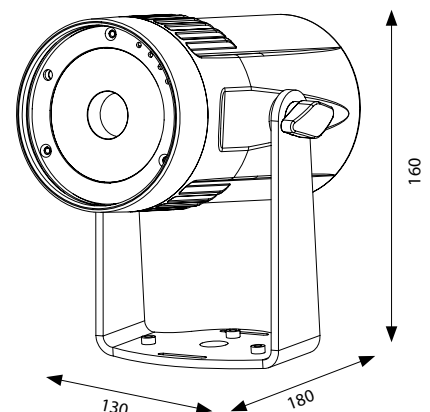




ARCHITECTURAL LEDs

ARCHITECTURAL LEDS

QUARIUX

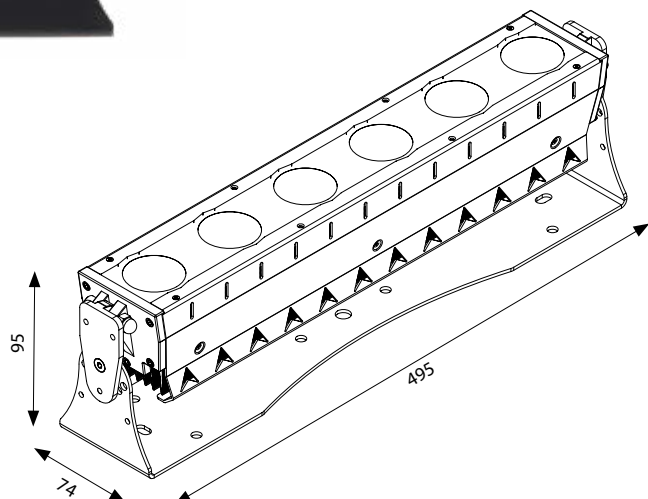

SG QUARIUXRGB - PRODUCT CODE RGB VERSION
SG QUARIUXRGBZ - PRODUCT CODE RGB VERSION ZOOM
SG QUARIUXRGBW - PRODUCT CODE RGBW VERSION
SG QUARIUXRGBWZ - PRODUCT CODE RGBW VERSION ZOOM
SG QUARIUXRGBL - PRODUCT CODE RGB-LIME VERSION
SG QUARIUXRGBLZ - PRODUCT CODE RGB-LIME VERSION ZOOM
SG QUARIUXWW - PRODUCT CODE Warm White VERSION
SG QUARIUXCW - PRODUCT CODE COLD WHITE VERSION
SG QUARIUXVW - PRODUCT CODE VARIABLE WHITE VERSION
SG CASEQUARIUX - CASE (6x SG QUARIUX)

LIGHT SOURCE

- 6x40W COB led
- LED lifespan: >50.000h
- LED refresh frequency: >500Hz flicker free

OPTIC SYSTEM

- Beam angle: 12° (standard)
- SSZ: Solid State Zoom (from 12° to 90°) upon request
- Optional optic: 24° - 48° - 80° - 12°x90° (asymmetric)

COLOR SYSTEM

- 3 in 1 led source RGB Full Color (standard)
- Available possibilities: RGBW – RGBL – WW – CW – VW
- Macro colors selectable via DMX
- Halogen and CMY Simulation

EFFECTS

- Linear dimmer 16 bit 0 - 100%
- Electronic strobo 1-20 flash/s adjustable speed
- Overboost Blinder

CONTROL AND PROGRAMMING

- DMX configurations available: 1/2/3/5/7/10 channels
- 4 dimmer curves selectable
- USITT DMX 512 protocol
- Master/Slave mode
- Presetted macro colors with speed regulation
- Static Color: static reproduction of one color
- Touch pad with led indicators
- Built-in wireless DMX by Wireless Solution

STRUCTURE

- Aluminium structure, available in black or customizable with other colors
- High tightness Lexan, resistant to cuts and perforations
- Fast coupling system
- Bracket for anchoring and ground support
- IP rating: IP 67
- Convection cooling system without fans
- Optional barndoor
- Operating temperature -20°C ~ 40°C

POWER SUPPLY


- Input Voltage: ~88-264Vac 47/63Hz
- Universal switching power supply
- Double temperature control
- Max power: 200W @ 230VAC
- In/Out power connection

WEIGHT AND DIMENSIONS

- Net weight: 5,7 kg
- Dimension: 495x74x95 mm

ARCHITECTURAL LEDS

IP LED 32C DL

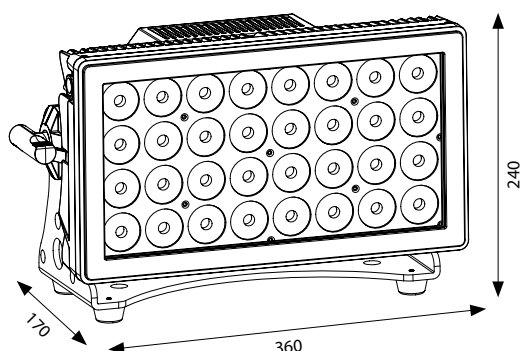

SG IPLED32CDLWD - PRODUCT CODE
SG CASEIPLED32C – CASE (4X SG IPLED32CDLWD)
SG IPLED32CBN – BARNDOOR

LIGHT SOURCE

- 32x12W led RGBWA-UV Full Color
- LED lifespan: > 50.000h
- LED refresh frequency: > 400Hz flicker-free

OPTIC SYSTEM

- Beam Angle: 25°
- Luminous flux: 2500lux @ 5m (full on)

COLOR SYSTEM

- LED source RGBWA-UV Full color
- Infinite chromatic possibilities

EFFECTS

- Linear dimmer 0-100%
- Adjustable strobe effect
- Color macros selectable via DMX
- 8 sectors control

CONTROL AND PROGRAMMING

- 6 DMX configurations available: 6/10/11/16/48/96 channels
- Key lock password for display lock
- USITT DMX 512 protocol
- Built-in Wireless DMX by Wireless Solution
- Master/Slave mode
- Static color mode
- Auto mode with 4 different programs selectable from the display, with speed adjustment
- Color mode with 63 different pre-programmed color macros
- White balance control

STRUCTURE AND CABINET

- Die cast aluminium housing, black color
- Blue LCD graphic display
- Soft touch buttons
- Front tempered glass
- "Light up" positioning with adjustable angle
- IP rating: IP65
- IP65 DMX 3-poles XLR In/Out connectors
- Low Noise controlled forced ventilation cooling system
- Frost filter included

POWER SUPPLY

- Input Voltage: AC~100-240V, 50/60 Hz
- Switching power supply unit
- Max Power: 390W @ 230VAC
- IP65 True ONE In/Out connectors

WEIGHT AND DIMENSIONS

- Net weight: 8,2 kg
- Dimensions: 360x170x240 mm

ARCHITECTURAL LEDS

IP LED 24C



SG IPLED24C - PRODUCT CODE

LIGHT SOURCE

- 24x8W led RGBW Full Color
- LED lifespan: > 50.000h
- LED refresh frequency: > 400Hz flicker-free

OPTIC SYSTEM

- Beam Angle: 25°

COLOR SYSTEM

- LED source RGBW Full color
- Infinite chromatic possibilities

EFFECTS

- Linear dimmer 0-100%
- Adjustable strobe effect
- Color macros selectable via DMX

CONTROL AND PROGRAMMING

- 3 DMX configurations available: 3/6/7 channels
- Key lock password for display lock
- USITT DMX 512 protocol
- Master/Slave mode
- Auto mode
- Remote controller included

STRUCTURE AND CABINET


- Die cast aluminium housing
- Blue LCD graphic display
- Front tempered glass
- "Light up" positioning with adjustable angle
- IP rating: IP65
- IP65 DMX In/Out connectors
- Convection cooling system without fans

POWER SUPPLY

- Input Voltage: AC~100-240V, 50/60 Hz
- Switching power supply unit
- Max power: 200W @ 230VAC
- IP65 In/Out power connection

WEIGHT AND DIMENSIONS

- Net weight: 8,4 kg
- Dimensions: 288x130x325,6 mm

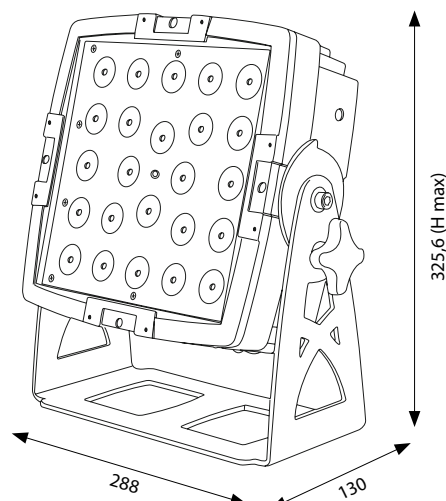

ARCHITECTURAL LEDS

IP LED 9C



SG IPLED9C - PRODUCT CODE

LIGHT SOURCE

- 9x8W led RGBW Full Color
- LED lifespan: > 50.000h
- LED refresh frequency: > 400Hz flicker-free

OPTIC SYSTEM

- Beam Angle: 25°

COLOR SYSTEM

- LED source RGBW Full color
- Infinite chromatic possibilities

EFFECTS

- Linear dimmer 0-100%
- Adjustable strobe effect
- Color macros selectable via DMX

CONTROL AND PROGRAMMING

- 3 DMX configurations available: 3/6/7 channels
- Key lock password for display lock
- USITT DMX 512 protocol
- Master/Slave mode
- Auto mode
- Remote controller included

STRUCTURE AND CABINET


- Die cast aluminium housing
- Blue LCD graphic display
- Front tempered glass
- "Light up" positioning with adjustable angle
- IP rating: IP65
- IP65 DMX In/Out connectors
- Convection cooling system without fans

POWER SUPPLY

- Input Voltage: AC~100-240V, 50/60 Hz
- Switching power supply unit
- Max power: 80W @ 230VAC
- IP65 In/Out power connection

WEIGHT AND DIMENSIONS


- Net weight: 3,8 kg
- Dimensions: 202x122,3x222 mm

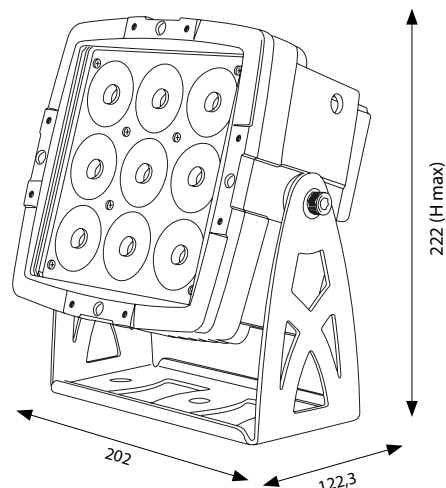



ARCHITECTURAL LEDS

IP LED BAR 12C

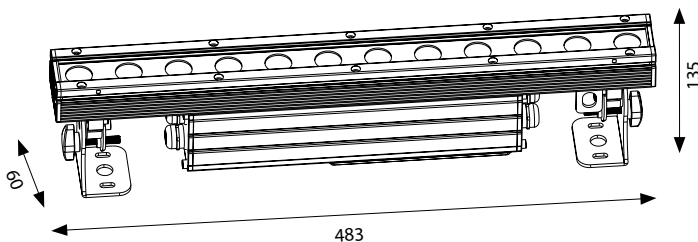

SG IPLEDBAR12C- PRODUCT CODE

LIGHT SOURCE

- 12x8W led RGBW Full Color
- LED lifespan: > 50.000h
- LED refresh frequency: > 400Hz flicker-free
- Optic system
- Beam Angle: 15°
- Luminous flux: 1221 lux @3mt

COLOR SYSTEM

- LED source RGBW Full color
- Infinite chromatic possibilities

EFFECTS

- Linear dimmer 0-100%
- Adjustable strobe effect
- Color macros selectable via DMX
- 2 sector control system

CONTROL AND PROGRAMMING

- 5 DMX configurations available: 3/4/7/8/10 channels
- USITT DMX 512 protocol
- Master / Slave mode
- Static color mode
- Automatic mode with 5 different programs selectable from the display
- Effect mode with 8 different programs selectable from the display
- Color mode with 6 different programs selectable from the display
- 4 dimmer curve

STRUCTURE AND CABINET

- Die cast aluminium housing, black color
- OLED display
- Soft touch buttons
- Front tempered glass
- Antiglare blade (included)
- "Light up" positioning with adjustable angle
- IP rating: IP65
- IP65 DMX In/Out connectors
- Convection cooling system without fans

POWER SUPPLY

- Input Voltage: AC~100-240V, 50/60 Hz
- Switching power supply unit
- Max power: 96W @ 230VAC
- IP65 In/Out power connection

WEIGHT AND DIMENSIONS

- Net weight: 3,3 kg
- Dimensions: 483x60x135 mm

ARCHITECTURAL LEDS

IP LED BAR 24C



SG IPLEDBAR24C - PRODUCT CODE

LIGHT SOURCE

- 24x8W led RGBW Full Color
- LED lifespan: > 50.000h
- LED refresh frequency: > 400Hz flicker-free

OPTIC SYSTEM

- Beam Angle: 15°
- Luminous flux: 1221 lux @3mt

COLOR SYSTEM

- LED source RGBW Full color
- Infinite chromatic possibilities

EFFECTS

- Linear dimmer 0-100%
- Adjustable strobe effect
- Color macros selectable via DMX
- 4 sector control system

CONTROL AND PROGRAMMING

- 7 DMX configurations available: 3/4/7/8/10/16/20 channels
- USITT DMX 512 protocol
- Master / Slave mode
- Static color mode
- Automatic mode with 5 different programs selectable from the display
- Effect mode with 8 different programs selectable from the display
- Color mode with 6 different programs selectable from the display
- 4 dimmer curve

STRUCTURE AND CABINET


- Die cast aluminium housing
- OLED display
- Soft touch buttons
- Front tempered glass
- Antiglare blade (included)
- "Light up" positioning with adjustable angle
- IP rating: IP65
- IP65 DMX In/Out connectors
- Convection cooling system without fans

POWER SUPPLY

- Input Voltage: AC~100-240V, 50/60 Hz
- Switching power supply unit
- Max power: 192W @ 230VAC
- IP65 In/Out power connection

WEIGHT AND DIMENSIONS


- Net weight: 5,6 kg
- Dimensions: 965x60x135 mm

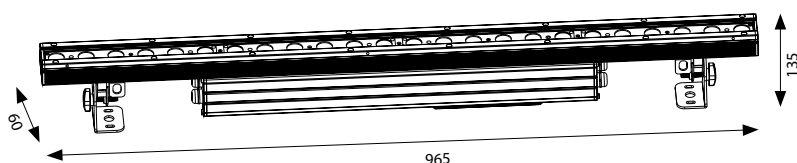



ARCHITECTURAL LEDS

IP LED MICRO BAR 54C

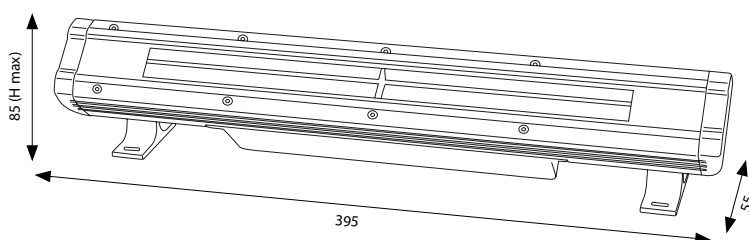

SG IPLEDMCBAR54C - PRODUCT CODE

LIGHT SOURCE

- 54x3W led RGB
- LED lifespan: > 50.000h
- LED refresh frequency: > 400Hz flicker-free

OPTIC SYSTEM

- Beam Angle: 60x10°

COLOR SYSTEM

- LED source RGB
- Infinite chromatic possibilities

EFFECTS

- Linear dimmer 0-100%
- Adjustable strobe effect
- Color macros selectable via DMX

CONTROL AND PROGRAMMING

- 5 DMX configurations available: 1/3/4/7/10 channels
- USITT DMX 512 protocol
- Master/Slave mode
- Auto mode with 10 different programs selectable from the display with speed adjustment
- Static color mode with strobe adjustment
- Color mode with 55 pre-programmed color macros

STRUCTURE AND CABINET

- Die cast aluminium housing, black color
- Color LCD display
- Front tempered glass
- "Light up" positioning with adjustable angle
- IP rating: IP65
- IP65 Power and DMX In/Out connector
- Convection cooling system without fans

POWER SUPPLY

- Input Voltage: AC~100-240V, 50/60 Hz
- Switching power supply unit
- IP65 Power and DMX In/Out connector

WEIGHT AND DIMENSIONS

- Net weight: 1,9 kg (bar)
- Dimensions: 395x55x85 mm (bar)

ARCHITECTURAL LEDS

IP LED BAR 8 BATTERY



SG IP LED BAR 8 BAT - PRODUCT CODE

SG CASE IP LED BAR BAT - CASE WITH CHARGE SYSTEM (4X SG IP LED BAR 8 BAT)

LIGHT SOURCE

- 8x10W led RGBW Full Color
- LED lifespan: >50.000h
- LED refresh frequency: >400Hz anti-flicker

OPTIC SYSTEM

- Beam angle: 10° x 40°
- Luminous flux: 600 lux @5mt (full on)

COLOR SYSTEM

- LED source 4 in 1 RGBW Full Color
- Infinite chromatic possibilities and colour temperature control

EFFECTS

- Linear Dimmer 0-100%
- Electronic strobe: 1-20 flashes/s with adjustable speed
- Color macros selectable by DMX
- Single pixel control

CONTROL AND PROGRAMMING

- 5 DMX configurations available: 1/4/9/32/36 channels
- USITT DMX 512 protocol
- Built-in DMX wireless receiver by Wireless Solutions
- Master / Slave mode with cable
- Static color mode with strobe adjustment
- Automatic mode with 13 different programs selectable from the display with speed adjustment
- Color mode with 51 different pre-programmed color macros
- IR remote controller included with possibility to select colors or macros (Included)
- Work power function for energy saving (eco mode)

STRUCTURE AND CABINET


- Die cast aluminium housing, black color
- Blue LCD graphic display
- Front tempered glass
- "Light up" positioning with adjustable angle
- IP65DMX 3-poles XLR In/Out connectors
- IP rating: IP65
- Convection cooling system without fans


POWER SUPPLY

- Input Voltage: AC~100-240V, 50/60 Hz, for normal working and battery recharge
- Switching power supply unit
- Internal rechargeable battery: 12VDC
- Capacity: 2x12 Ah
- Runtime battery: ~ 5 h (full ON)
- Max power: 80W @ 230VAC
- Charging cycle: ~ 8 h (Projector off)
- IP65 True ONE input power connection

WEIGHT AND DIMENSIONS

- Net weight: 9.3 kg
- Dimensions: 635x172x210 mm

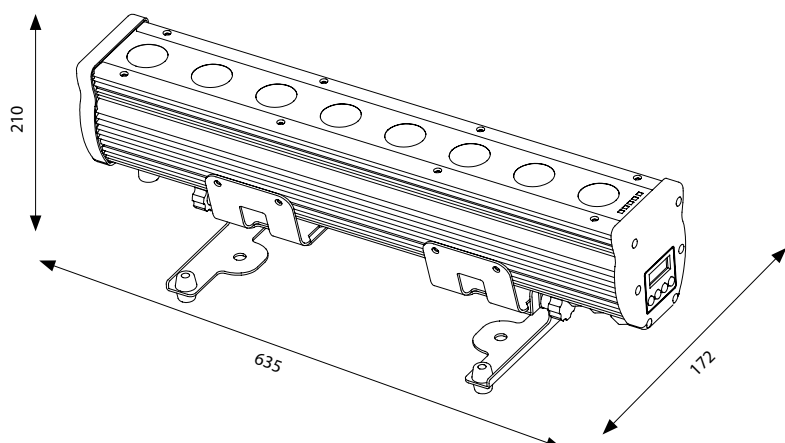

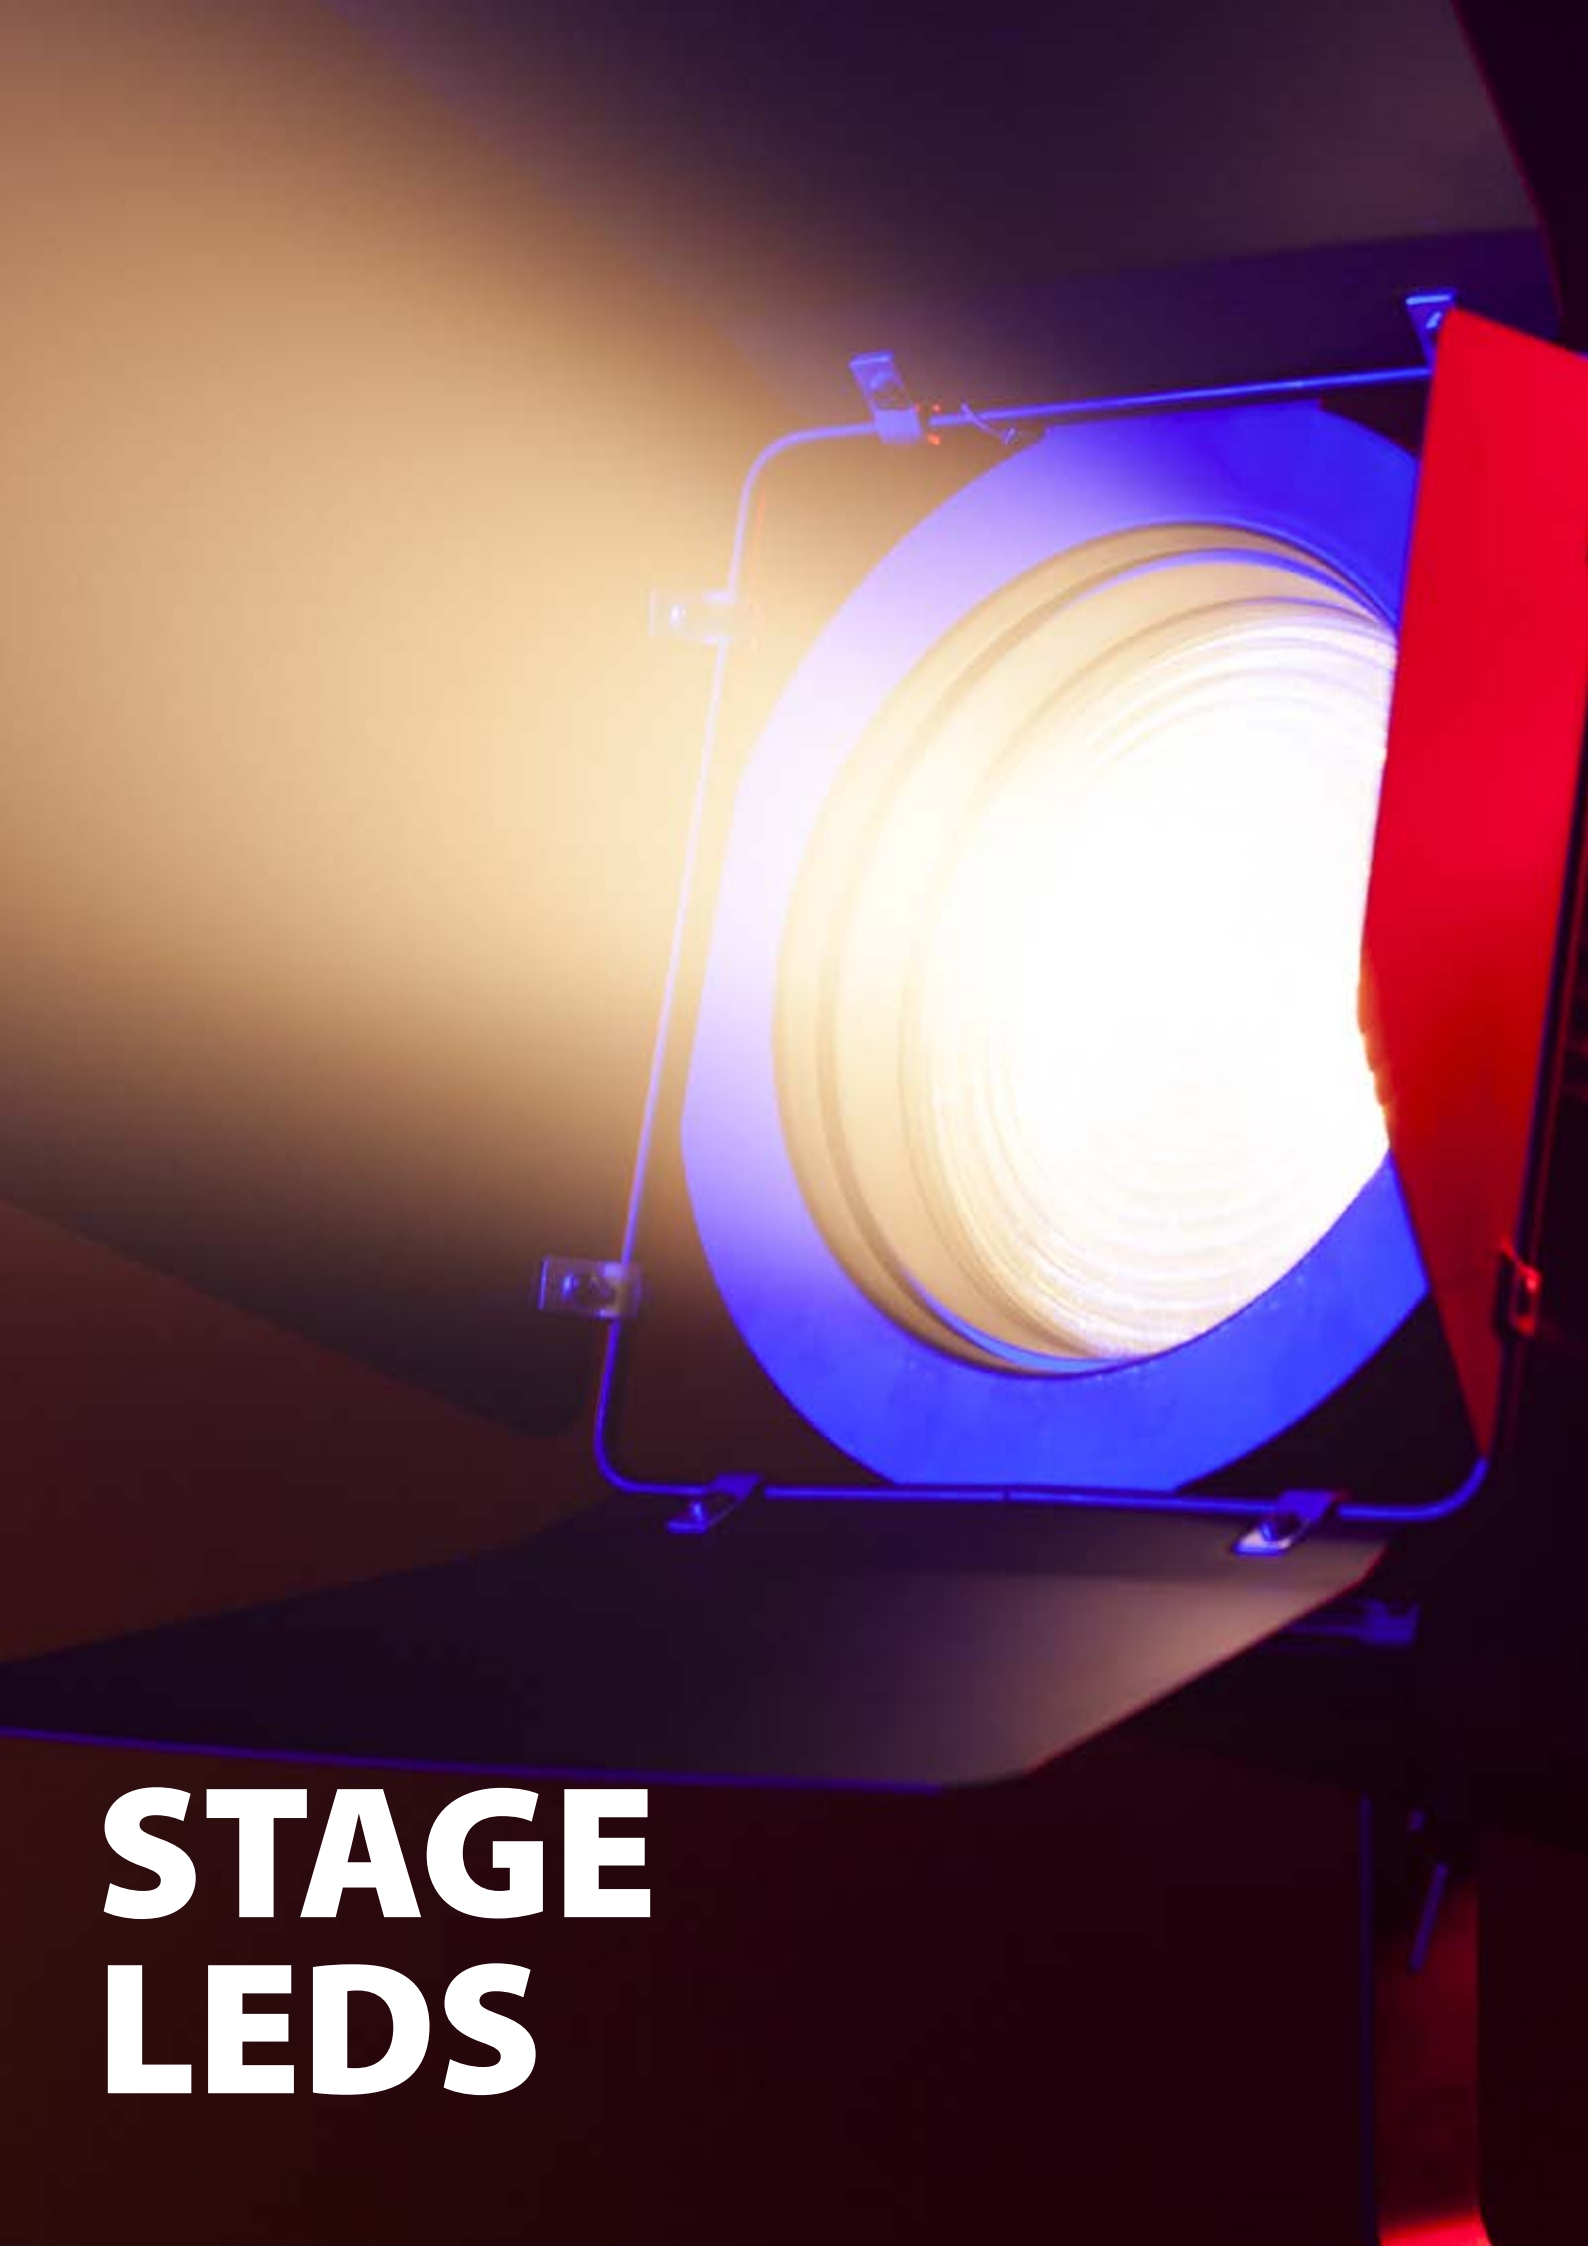

**STAGE
LEDs**

STAGE LEDS

SAGOLED 300



SG SAGOLEDWW300 - PRODUCT CODE Warm White VERSION
SG SAGOLEDWCW300 - PRODUCT CODE Cold WHITE VERSION
SG CASESAGOLED300 - CASE (4x SG SAGOLED300)

LIGHT SOURCE

- 1x300W Led Warm White 3200K
- CRI \90Ra
- LED lifespan: >50.000h
- LED refresh frequency: >400Hz flicker free

OPTIC SYSTEM

- Beam angle: 26° (included)
- Optional: 19° - 36° - 50°
- Luminous flux: 6150 lux @5mt (19°)

COLOR SYSTEM

- Warm White 3200K COB LED Source

EFFECTS

- Linear dimmer 0-100%
- Electronic strobe: 1-20 flashes/s with adjustable speed

CONTROL AND PROGRAMMING

- 2 DMX channels configuration: 1/2 channels
- USITT DMX 512 protocol

STRUCTURE AND CABINET


- High resistance black Alluminium housing
- Blue LCD graphic display
- Mounting points: single bracket for suspension
- Gel filter frame included
- Gobo holder included
- Iris (sold separately)
- DMX 3-poles XLR In/Out connectors
- IP rating: IP20
- Forced Air fan cooling system with "Low Noise" electronic control

POWER SUPPLY

- Input Voltage: AC~100-240V 50/60Hz
- Switching power supply unit
- Max power: 350W @ 230VAC
- In/Out connection with Powercon sockets
- Power supply cable included

WEIGHT AND DIMENSIONS

- Net weight: 10,5kg
- Dimensions: 690x360x465 mm

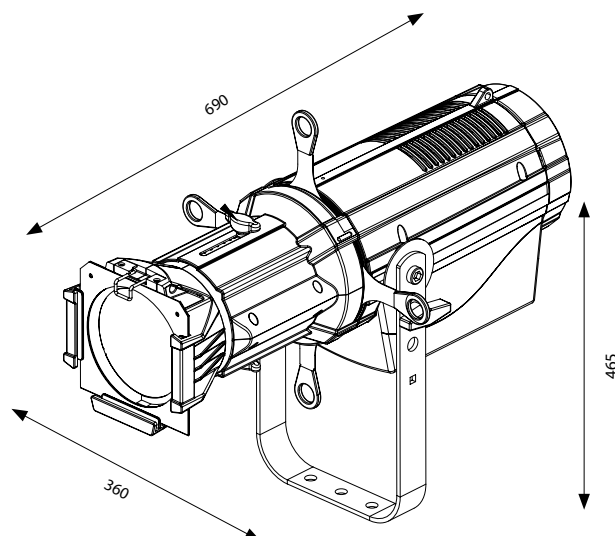

STAGE LEDS

SAGOLED 120



SG SAGOLEDWW - PRODUCT CODE Warm White VERSION

SG SAGOLEDW - PRODUCT CODE Cold WHITE VERSION

SG CASESAGOLED - CASE (4x SG SAGOLEDWW)

LIGHT SOURCE

- 1x120W Led Warm White 3200K
- LED lifespan: >50,000h
- LED refresh frequency: >400Hz flicker free

OPTIC SYSTEM

- Beam angle: 19° (included)
- Optional: 26° - 36° - 50°
- Luminous flux: 2950 lux @5mt (19°)

COLOR SYSTEM

- Warm White 3200K LED Source

EFFECTS

- Linear dimmer 0-100%
- Electronic strobe: 1-20 flashes/s with adjustable speed

CONTROL AND PROGRAMMING

- 1 DMX channels configuration: 2 channels
- USITT DMX 512 protocol
- Master / Slave mode
- Auto mode: 2 programs can be selected from display

STRUCTURE AND CABINET


- Metal housing and high resistance plastic covers, black color
- Red LED display
- Mounting points: single bracket
- Gel filter frame included
- Gobo holder included
- Iris (sold separately)
- DMX 3-poles XLR In/Out connectors
- IP rating: IP20
- Forced Air fan cooling system with "Low Noise" electronic control

POWER SUPPLY

- Input Voltage: AC~100-240V 50/60Hz
- Switching power supply unit
- Max power: 150W @ 230VAC
- Power supply cable 1,5 mt

WEIGHT AND DIMENSIONS

- Net weight: 4,8 kg
- Dimensions: 643x360x465 mm

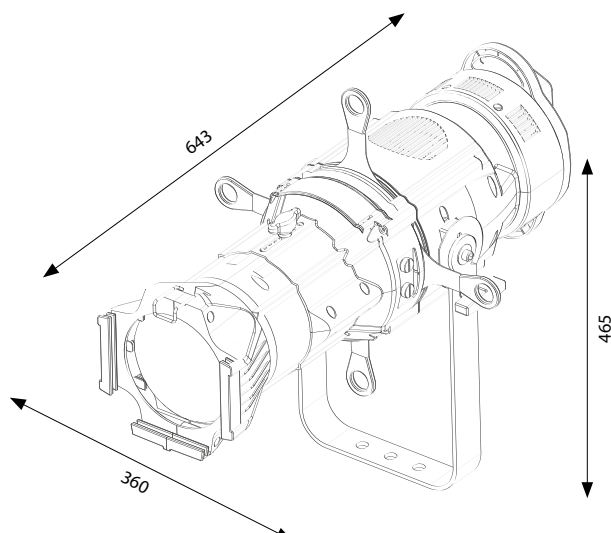

STAGE LEDS

MINI SAGOLED 60



SG SAGOLEDWWM - PRODUCT CODE Warm White VERSION

SG SAGOLEDWCWM - PRODUCT CODE Cold WHITE VERSION

SG CASESAGOLEDM - CASE (4x SG SAGOLEDWWM)

LIGHT SOURCE

- 1x60W Led Warm White 3200K
- LED lifespan: > 50.000h
- LED refresh frequency: > 400Hz flicker-free

OPTIC SYSTEM

- Beam Angle: 19° (included)
- Optional: 26° - 36° - 50°

COLOR SYSTEM

- Warm White 3200K LED Source

EFFECTS

- Linear dimmer 0-100%
- Electronic Strobe: 1-20 flashes/s with adjustable speed

CONTROL AND PROGRAMMING

- 1 DMX configurations available: 2 channels
- USITT DMX 512 protocol
- Master/Slave mode
- Auto mode: 2 programs can be selected from display

STRUCTURE AND CABINET


- Metal housing and high resistance plastic covers, black color
- Red LED display
- Mounting points: single bracket
- Gel filter frame included
- Gobo holder included
- Iris not included (sold separately)
- DMX 3-poles XLR In/Out connection with external USB box
- IP rating: IP20
- Forced Air fan cooling system with "Low Noise" electronic control

POWER SUPPLY

- Input Voltage: AC~100-240V, 50/60 Hz
- Switching power supply unit
- Max power: 70W @ 230VAC
- Power supply cable 1mt included
- Max 4 pcs linkable @ 240VAC

WEIGHT AND DIMENSIONS

- Net weight: 2,2 kg
- Dimensions: 158x305x238 mm

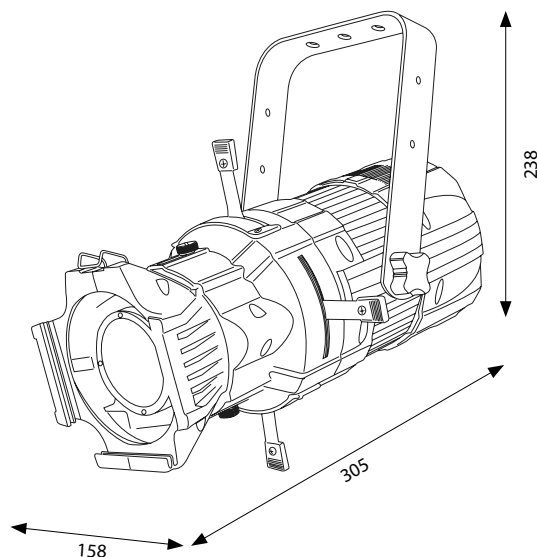



SG JNRPROWW - PRODUCT CODE Warm White VERSION

SG JNRPROCW - PRODUCT CODE Cold White VERSION

- PRODUCT CODE RGBW VERSION

SG CASEJNRPRO - CASE (6X SG JNRPROWW)

LIGHT SOURCE

- 1x30W Led Warm White 3200K
- LED lifespan: > 50,000h
- LED refresh frequency: > 400Hz anti-flicker

OPTIC SYSTEM

- Beam Angle: 19° (included)
- Optional: 14° - 26° - 36°
- Luminous flux: 215 lux @5m (full on)

COLOR SYSTEM

- Warm White 3200K LED source

EFFECTS

- Linear dimmer 0-100%
- Electronic Strobe: 1-20 flashes/s with adjustable speed

CONTROL AND PROGRAMMING

- 1 DMX channels configuration: 2 channels
- USITT DMX 512 protocol
- Auto mode: 1 programs can be selected from dip switch

STRUCTURE AND CABINET


- High resistance black plastic and aluminium housing
- Mounting points: single bracket
- Gel filter frame included
- Gobo holder included
- Iris not included (sold separately)
- DMX 3-poles XLR In/Out connectors
- IP rating: IP20

POWER SUPPLY

- Input Voltage: AC~100-240V, 50/60 Hz
- Max power: 35W @ 230VAC
- Power supply cable 1mt included

WEIGHT AND DIMENSIONS

- Net weight: 1,1 kg
- Dimensions: 160x265x205 mm

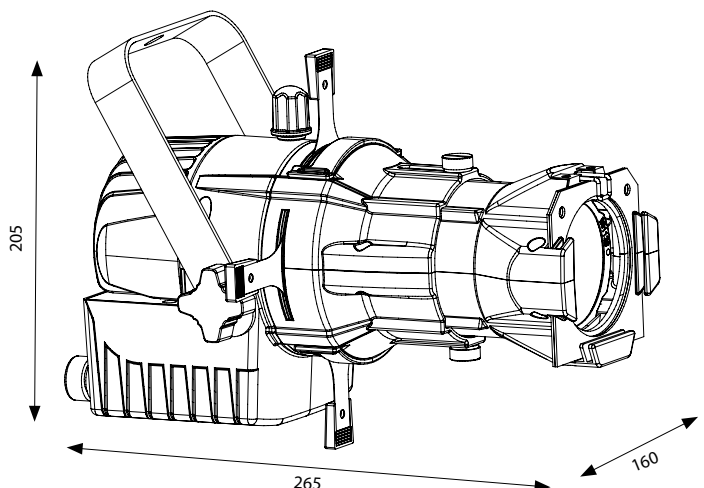

HALO FRESNEL LED 200



SG HALOFWW - PRODUCT CODE Warm White VERSION

SG HALOFCW - PRODUCT CODE Cold WHITE VERSION

SG CASEHALOFR - CASE (4x SG HALOFWW)

LIGHT SOURCE

- 1X200W led COB Warm White 3200K
- CRI $\geq 85Ra$
- LED lifespan: >50.000h
- LED refresh frequency: >400Hz flicker-free

OPTIC SYSTEM

- Beam angle: zoom from 15° to 55°
- Luminous flux: 2500 lux @5mt (15°)
- Luminous flux: 1390 lux @5mt (55°)

COLOR SYSTEM

- Warm White 3200K COB LED Source

EFFECTS

- Linear dimmer 0-100%
- Electronic Strobe: 1-20 flashes/s with adjustable speed

CONTROL AND PROGRAMMING

- 2 different DMX channels configurations: 2/3 channels
- USITT DMX 512 protocol
- Manual mode for dimmer and zoom adjustment
- Direct manual control for zoom on the rear panel

STRUCTURE AND CABINET


- Black aluminum housing
- Blue LCD graphic display
- Mounting points: single bracket for suspension
- Rotating barndoor with "safety cable" (included)
- Single handle in the rear side for easy transportation
- DMX 3/5-poles XLR In/Out connectors
- IP rating: IP20
- Forced Air fan cooling system with "Low Noise" electronic control

POWER SUPPLY

- Input Voltage: AC~100-240V 50/60Hz
- Switching power supply unit
- Max power: 250W @ 230VAC
- In/Out connection with Powercon sockets
- Power supply cable 1,5 mt included
- Max 4 pcs linkable @ 240VAC

WEIGHT AND DIMENSIONS

- Net Weight: 8,4 kg
- Dimensions: 260x450x310 mm

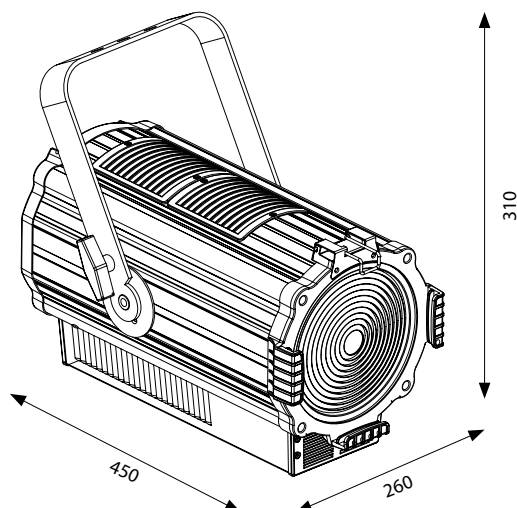

HALO FRESNEL LED 100

SG HALOFWWM - PRODUCT CODE Warm White VERSION

SG HALOFCWM - PRODUCT CODE Cold White VERSION

SG CASEHALOFR - CASE (4x SG HALOFWWM)



LIGHT SOURCE

- 1x100W Led COB Warm White 3200K
- CRI \geq 85Ra
- LED lifespan: > 50.000h
- LED refresh frequency: > 400Hz flicker-free

OPTIC SYSTEM

- Beam Angle: manual zoom from 15° to 55°
- Luminous flux: 1683lux @ 5mt (15°)
- Luminous flux: 886lux @ 5mt (55°)

COLOR SYSTEM

- Warm White 3200K COB LED Source

EFFECTS

- Linear dimmer 0-100%
- Electronic Strobe: 1-20 flashes/s with adjustable speed

CONTROL AND PROGRAMMING

- 2 DMX configurations available: 1/2 channels
- USITT DMX 512 protocol
- Manual dimmer mode

STRUCTURE AND CABINET


- Aluminium housing, black color
- Blue LCD graphic display
- Mounting points: single bracket
- Rotating barndoor with "safety cable" included
- Single handle in the rear side for easy transportation
- DMX 3/5-poles XLR In/Out connection
- IP rating: IP20
- Forced Air fan cooling system with "Low Noise" electronic control

POWER SUPPLY

- Input Voltage: AC~100-240V, 50/60 Hz
- Switching power supply unit
- Max power: 150W @ 230VAC
- In/Out connection with PowerCON sockets
- Power supply cable 1mt included
- Max 8 pcs linkable @ 240VAC

WEIGHT AND DIMENSIONS

- Net weight: 7 kg
- Dimensions: 260x330x310 mm (without barndoor)

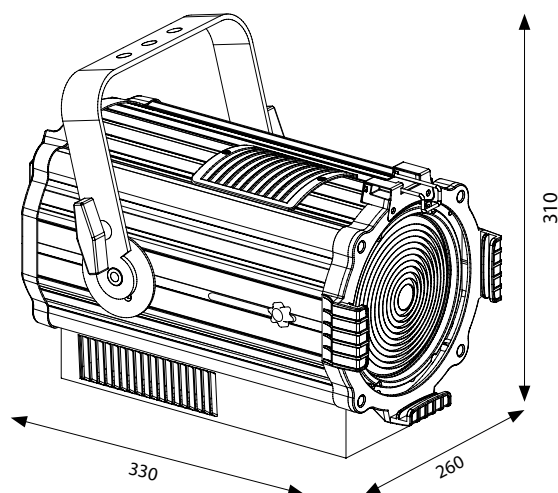

HALO FRESNEL LED 60



SG HALOFWWM60 - PRODUCT CODE Warm White VERSION

SG HALOFCWM60 - PRODUCT CODE Cold White VERSION

SG CASEHALOFM - CASE (4X SG HALOFWWM60)

LIGHT SOURCE

- 1x60W Led COB Warm White 3200K
- CRI \geq 85Ra
- LED lifespan: > 50.000h
- LED refresh frequency: > 400Hz flicker-free

OPTIC SYSTEM

- Beam Angle: manual zoom from 15° to 55°
- Luminous flux: 1490lux @ 5mt (15°)
- Luminous flux: 530lux @ 5mt (55°)

COLOR SYSTEM

- Warm White 3200K COB LED Source

EFFECTS

- Linear dimmer 0-100%
- Electronic Strobe: 1-20 flashes/s with adjustable speed

CONTROL AND PROGRAMMING

- 1 DMX configurations available: 2 channels
- USITT DMX 512 protocol
- Manual dimmer mode

STRUCTURE AND CABINET


- High resistance plastic housing, black color
- Red LED display
- Mounting points: single bracket
- Rotating barndoor with "safety cable" included
- DMX 3-poles XLR In/Out connection with external USB box
- IP rating: IP20
- Forced Air fan cooling system with "Low Noise" electronic control

POWER SUPPLY

- Input Voltage: AC~100-240V, 50/60 Hz
- Switching power supply unit
- Max power: 70W @ 230VAC
- Power supply cable 1mt included
- Max 4 pcs linkable @ 240VAC

WEIGHT AND DIMENSIONS

- Net weight: 2 kg
- Dimensions: 165x260x230 mm (without barndoor)

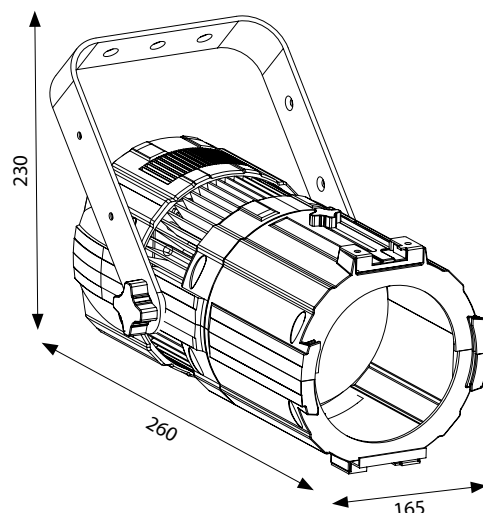

HALO PROFILE LED ZOOM 200 15-28

SG HALOPWW1528 - PRODUCT CODE Warm White VERSION

SG HALOPCW1528 - PRODUCT CODE Cold White VERSION

SG CASEHALOPR - CASE (4X SG HALOPWW1528)



LIGHT SOURCE

- 1X200W led COB Warm White 3200K
- CRI ≥ 85 Ra
- LED lifespan: >50.000h
- LED refresh frequency: >400Hz flicker-free

OPTIC SYSTEM

- Beam angle: zoom from 15° to 28°
- Luminous flux: 4090lux @5mt (15°)
- Luminous flux: 1800lux @5mt (28°)

COLOR SYSTEM

- Warm White 3200K COB LED Source

EFFECTS

- Linear dimmer 0-100%
- Electronic Strobe: 1-20 flashes/s with adjustable speed

CONTROL AND PROGRAMMING

- 2 different DMX channels configurations: 1/2 channels
- USITT DMX 512 protocol

STRUCTURE AND CABINET


- Black aluminum housing
- Blue LCD graphic display
- Mounting points: single bracket
- Single handle in the rear side for easy transportation
- Gel filter frame included
- Gobo holder included
- Iris (sold separately)
- DMX 3/5-poles XLR In/Out connection
- IP rating: IP20
- Forced Air fan cooling system with "Low Noise" electronic control

POWER SUPPLY

- Input Voltage: AC~100-240V 50/60Hz
- Switching power supply unit
- Max power: 250W @ 230VAC
- In/Out connection with PowerCON sockets
- Power supply cable 1,5 mt included
- Max 4 pcs linkable @ 240VAC

WEIGHT AND DIMENSIONS

- Net Weight: 10kg
- Dimensions: 275x745x410 mm

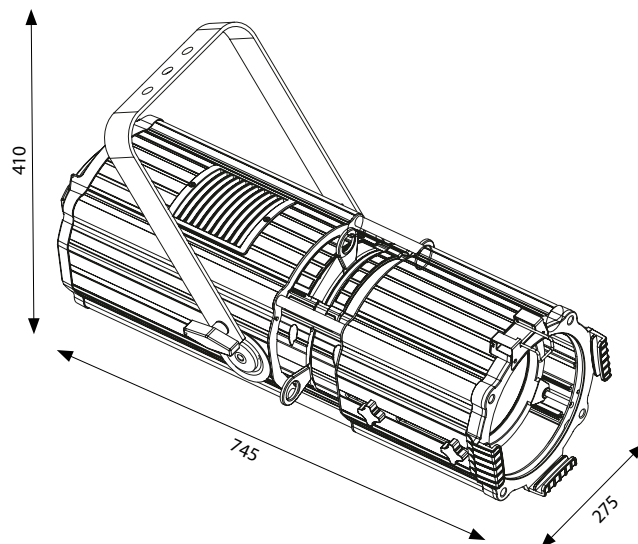

HALO PROFILE LED ZOOM 200 20-45



SG HALOPWW2045 - PRODUCT CODE Warm White VERSION

SG HALOPCW2045 - PRODUCT CODE Cold White VERSION

SG CASEHALOPR - CASE (4X SG HALOPWW2045)

LIGHT SOURCE

- 1X200W LED COB Warm White 3200K
- CR ≥ 85 Ra
- LED lifespan > 50.000h
- LED refresh frequency: > 400Hz flicker free

OPTIC SYSTEM

- Beam angle: zoom from 20° to 45°
- Luminous flux: 2950lux@5mt (20°)
- Luminous flux: 1550lux@5mt (45°)

COLOR SYSTEM

- Warm White 3200K COB LED Source

EFFECTS

- Linear dimmer 0 - 100%
- Electronic Strobe: 1-20 flashes/s with adjustable speed

CONTROL AND PROGRAMMING

- 2 different DMX channels configurations: 1/2 channels
- USITT DMX 512 protocol

STRUCTURE AND CABINET


- Black aluminium housing
- Blue LCD graphic display
- Mounting points: single bracket
- Single handle in the rear side of the for easy transportation
- Gel filter frame included
- Gobo holder included
- Iris (sold separately)
- DMX 3/5-poles XLR In/Out connection
- IP rating: IP20
- Forced Air fan cooling system with "Low Noise" electronic control

POWER SUPPLY

- Input voltage: AC~100-240V 50/60Hz
- Switching power supply unit
- Max power: 250W @ 230VAC
- In/Out connection with PowerCON sockets
- Power supply cable 1,5 mt included
- Max 4 pcs linkable @ 240VAC

WEIGHT AND DIMENSIONS

- Net Weight: 10kg
- Dimension: 275x645x410 mm

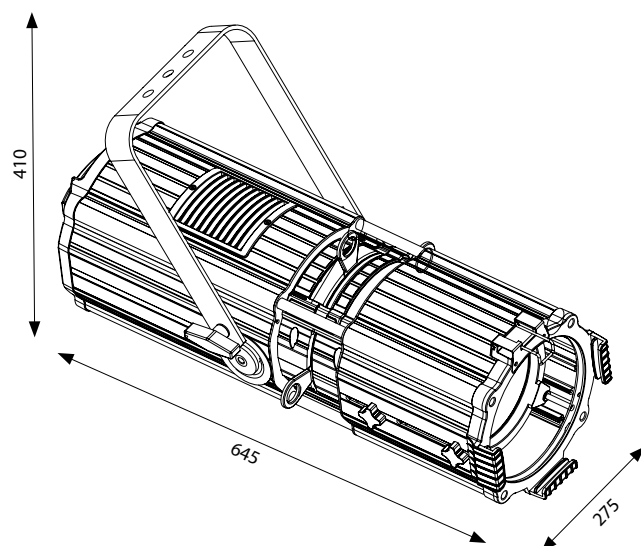

HALO PROFILE LED ZOOM 60



SG HALOPWWM60 - PRODUCT CODE Warm White VERSION

SG HALOPCWM60 - PRODUCT CODE Cold White VERSION

SG CASEHALOPM - CASE (4X SG HALOPWWM60)

LIGHT SOURCE

- 1X60W LED COB Warm White 3200K
- CRI≥85Ra
- LED lifespan > 50.000h
- LED refresh frequency: > 400Hz anti-flicker

OPTIC SYSTEM

- Beam angle: zoom from 19° to 36°
- Luminous flux: 890lux@5mt (19°)
- Luminous flux: 280lux@5mt (36°)

COLOR SYSTEM

- Warm White 3200K COB LED Source

EFFECTS

- Linear dimmer 0 - 100%
- Electronic Strobe: 1-20 flashes/s with adjustable speed

CONTROL AND PROGRAMMING

- 1 different DMX channels configuration: 2 channels
- USITT DMX 512 protocol

STRUCTURE AND CABINET


- Black aluminium housing
- Mounting points: single bracket
- External box for address, function settings and manual control of Dimmer
- DMX 3-poles XLR In/Out connection with external USB box
- IP rating: IP20
- Forced Air fan cooling system with "Low Noise" electronic control

POWER SUPPLY

- Input voltage: AC~100-240V 50/60Hz
- Switching power supply unit
- Max power: 65W @ 230VAC
- Max 4 pcs linkable @ 240VAC

WEIGHT AND DIMENSIONS

- Net Weight: 3.5 kg
- Dimension: 180x440x300 mm

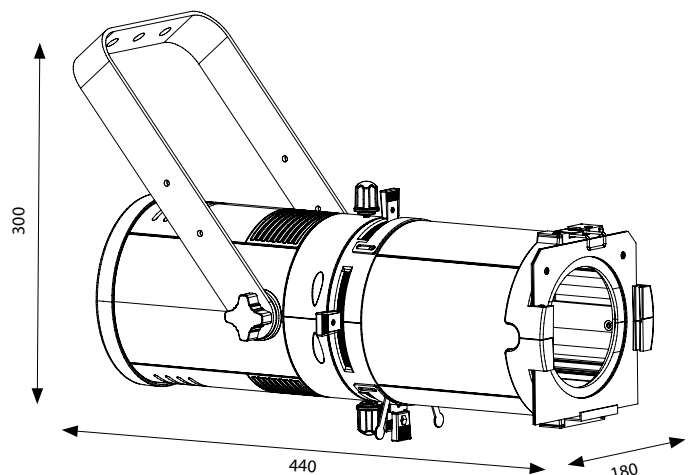

STUDIO LED PANEL RGB



SG STUDIOPRGB - PRODUCT CODE
SG CASESTUDIOP - CASE (4x SG STUDIOP)

LIGHT SOURCE

- 1456 RGB leds
- LED lifespan: >50.000h
- LED refresh frequency: >400Hz flicker-free

OPTIC SYSTEM

- Beam angle: 110°

COLOR SYSTEM

- RGB led color mixing

EFFECTS

- Linear Dimmer 0-100%
- Adjustable Strobe

CONTROL AND PROGRAMMING

- 1 DMX configuration available: 6 channels
- USITT DMX 512 protocol
- Master/Slave mode

STRUCTURE AND CABINET


- Die cast aluminum housing
- Blue LCD graphic display
- DMX 3/5-poles XLR In/Out connectors
- Convection cooling system without fans
- Barndoor included

POWER SUPPLY


- Input Voltage: AC~100-240V, 50/60 Hz
- Switching power supply unit
- Max power: 250W @ 230VAC
- In/Out connection with PowerCON sockets
- Power supply cable included

WEIGHT AND DIMENSIONS

- Net weight: 11,5 kg
- Dimensions: 490x150x275 mm

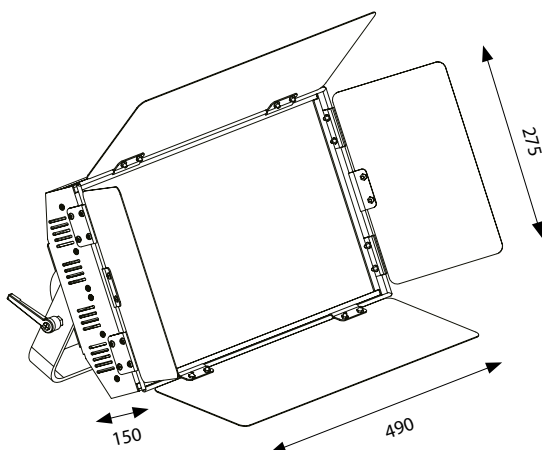

STUDIO LED PANEL WHITE

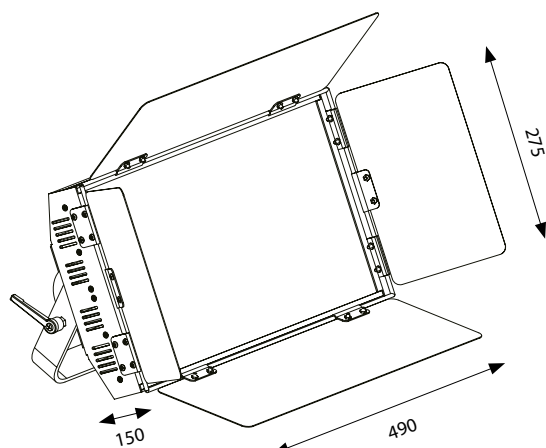

SG STUDIOPWW - PRODUCT CODE Warm White VERSION
SG STUDIOPCW - PRODUCT CODE Cold White VERSION
SG CASESTUDIOP - CASE (4x SG STUDIOP)

LIGHT SOURCE

- 1456 Warm White 3200K leds
- CRI ≥ 90 Ra
- LED lifespan: >50.000h
- LED refresh frequency: >400Hz flicker-free

OPTIC SYSTEM

- Beam angle: 110°

EFFECTS

- Linear Dimmer 0-100%
- Adjustable Strobe

CONTROL AND PROGRAMMING

- 2 DMX configuration available: 1/2 channels
- USITT DMX 512 protocol
- Master/Slave mode

STRUCTURE AND CABINET

- Die cast aluminum housing
- Blue LCD graphic display
- DMX 3/5-poles XLR In/Out connectors
- Convection cooling system without fans
- Barn door included

POWER SUPPLY


- Input Voltage: AC~100-240V, 50/60 Hz
- Switching power supply unit
- Max power: 250W @ 230VAC
- In/Out connection with PowerCON sockets
- Power supply cable included

WEIGHT AND DIMENSIONS

- Net weight: 11,5 kg
- Dimensions: 490x150x275 mm

STAGE LEDS

BLAZER 1500S

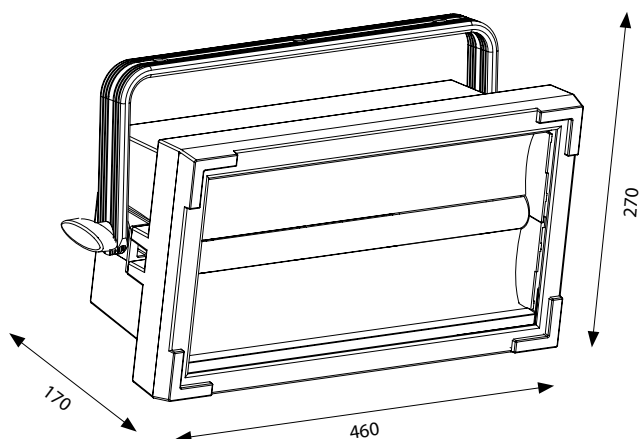

SG BLAZER1500S - PRODUCT CODE
SG CASEBLAZERS - CASE (4X SG BLAZER1500S)

LIGHT SOURCE

- 228 White led 6500K
- LED lifespan: > 50.000h
- LED refresh frequency: > 400Hz flicker-free

OPTIC SYSTEM

- Beam Angle: 90x140°

EFFECTS

- Linear dimmer 0-100%
- Adjustable strobe effect
- Random strobe effect
- Sectors control

CONTROL AND PROGRAMMING

- Dynamic patterns with direction and speed control
- 4 DMX configurations available: 3/4/14 channels
- USITT DMX 512 protocol

STRUCTURE AND CABINET

- Metal housing and high resistance plastic covers, black color
- LCD Graphic display
- Mounting points: single adjustable bracket
- DMX 3-poles XLR In/Out connections
- Controlled forced air fan cooling system

POWER SUPPLY

- Input Voltage: AC~100-240V, 50/60 Hz
- Switching power supply unit
- Max power: 2000W @ 230VAC
- In/Out connection with PowerCON sockets
- Power supply cable included

WEIGHT AND DIMENSIONS

- Net weight: 6,5 kg
- Dimensions: 460x170x270 mm

STAGE LEDS

BLOK 2TW



SG BLOK2TW - PRODUCT CODE
SG CASEBLOK2 - CASE (4X SG BLOK2TW)
SG BLOK2TWH - HARDWARE CONNECTION SYSTEM

LIGHT SOURCE

- 2x100W led COB Warm White 3200K
- CRI≥85Ra
- LED lifespan: > 50.000h
- LED refresh frequency: > 400Hz anti-flicker

OPTIC SYSTEM

- Beam Angle: 94°

COLOR SYSTEM

- Warm White 3200K COB LED Source

EFFECTS

- Linear dimmer 0-100%
- Adjustable strobe effect
- RED-Shift effect for Halogen blinder simulation
- Single pixel control

CONTROL AND PROGRAMMING

- 6 DMX configurations available: 1/4/6/2/6/10 channels
- Key lock password for display lock
- USITT DMX 512 protocol

STRUCTURE AND CABINET


- Die cast aluminium housing, black color
- Hardware system connection for multiple projectors stack (SG BLOK2TWH sold separately)
- LCD graphic display
- Soft touch buttons
- "Light up" positioning with adjustable angle
- IP rating: IP65
- IP65 DMX 3-poles XLR In/Out connectors
- Forced Air fan cooling system with "Low Noise" electronic control


POWER SUPPLY

- Input Voltage: AC~100-240V, 50/60 Hz
- Switching power supply unit
- Max Power: 315W @ 230VAC
- IP65 True ONE In/Out connectors

WEIGHT AND DIMENSIONS

- Net weight: 8,2 kg
- Dimensions: 400x240x230 mm

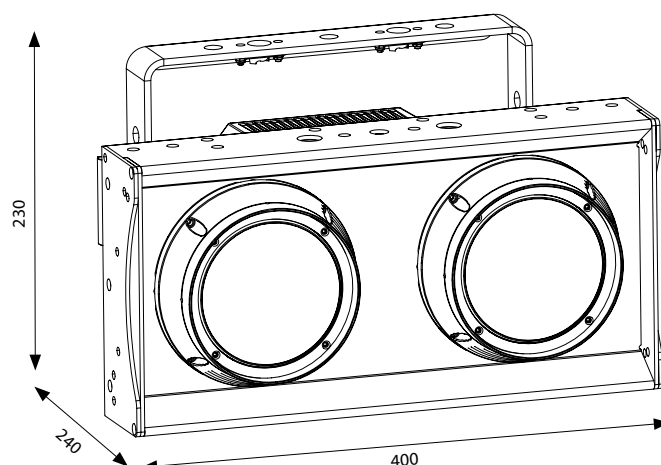

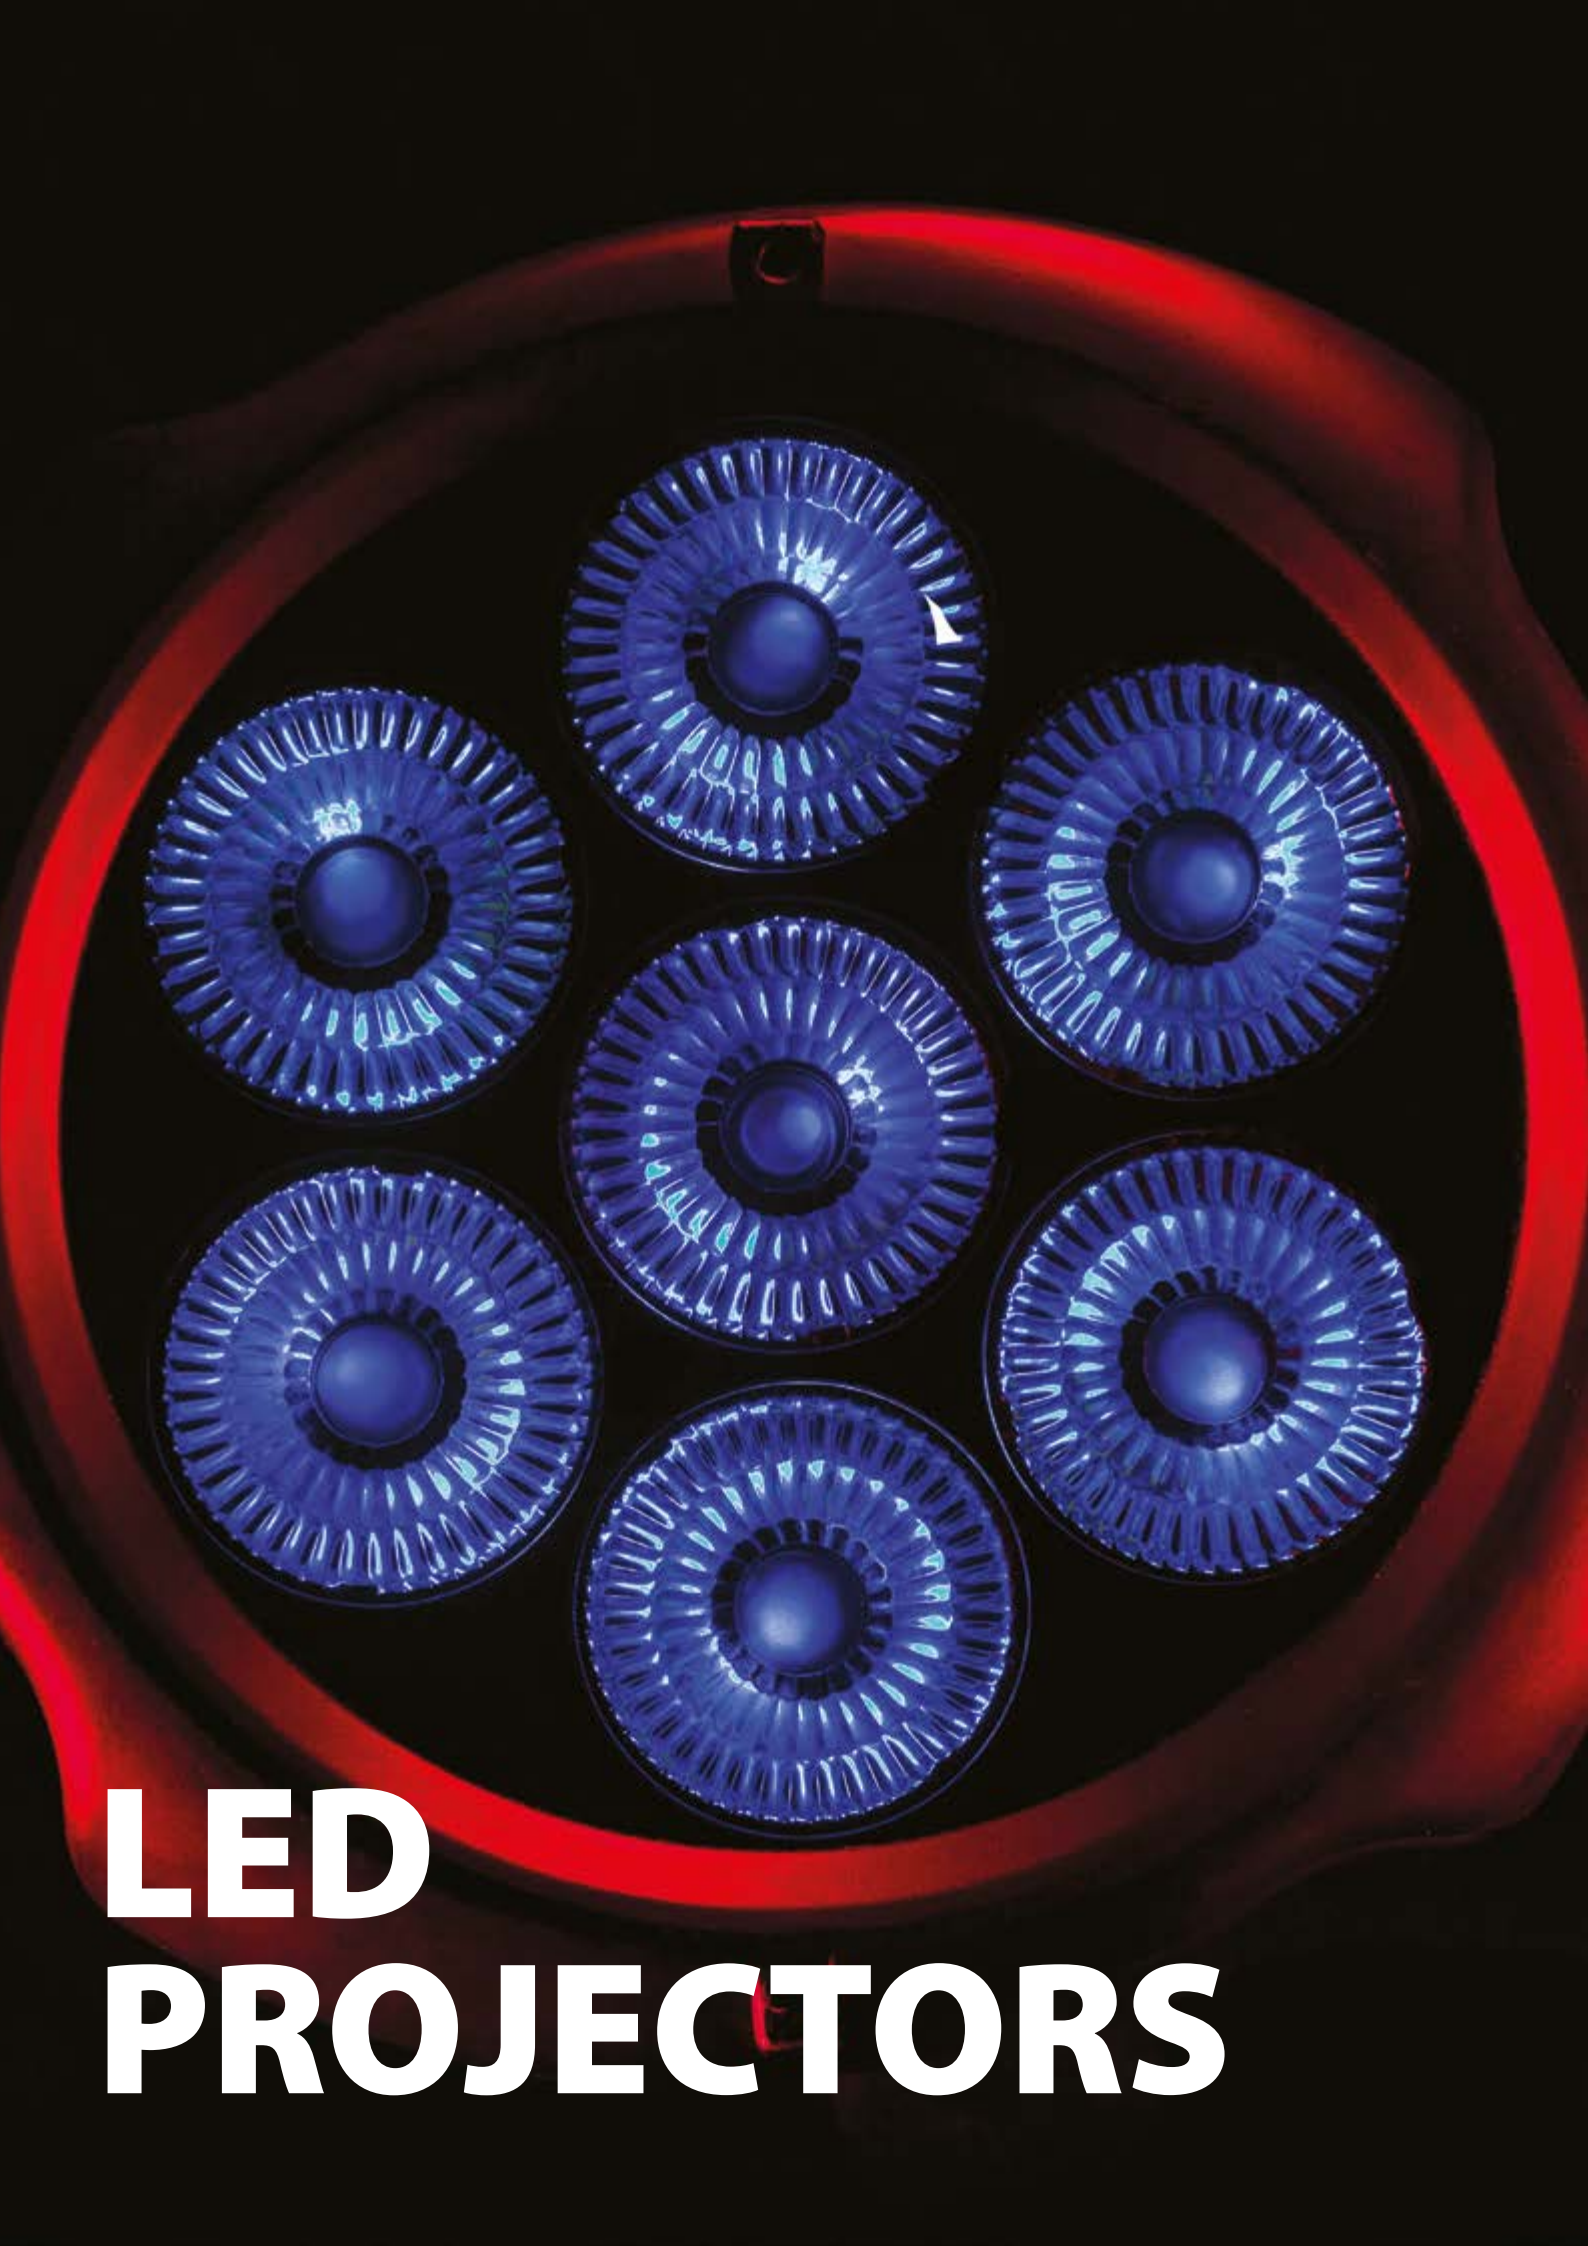

LED PROJECTORS



LED PROJECTORS

AQUPAR 7



SG AQUPAR7 - PRODUCT CODE

SG CASEAQUPAR - CASE (6x SG AQUPAR)

LIGHT SOURCE

- 7x12W RGBWA-UV led
- LED lifespan: >50.000h
- LED refresh frequency: >400Hz flicker free

OPTIC SYSTEM

- Beam angle: 25°

COLOR SYSTEM

- RGBWA-UV full color mixing
- Infinite chromatic possibilities and color temperature control

EFFECTS

- Linear Dimmer 0-100%
- Electronic strobe: 1-20 flashes/s with adjustable speed
- Color macros selectable via DMX

CONTROL AND PROGRAMMING

- 4 DMX configurations available: 3/6/8/13 channels
- Key lock password for display lock
- USITT DMX 512 protocol
- Master / Slave mode
- Automatic mode with 21 different programs selectable from the display with independent adjustment of the speed and strobe
- Color mode with independent adjustment of single color with 70 different selections
- 11 white balance selections
- 4 dimmer curves

STRUCTURE AND CABINET


- Die cast aluminum housing, black color
- Color LCD display
- Front tempered glass
- Mounting points: double bracket for suspension or floor mount
- IP rating: IP65
- IP65 DMX 3-poles XLR In/Out connectors
- Convection cooling system without fans

POWER SUPPLY

- Input Voltage: AC~100-240V, 50/60 Hz
- Switching power supply unit
- Max power: 85W @ 230VAC
- IP65 True ONE In/Out connectors

WEIGHT AND DIMENSIONS

- Net weight: 3,2 kg
- Dimensions: 250x175x230 mm

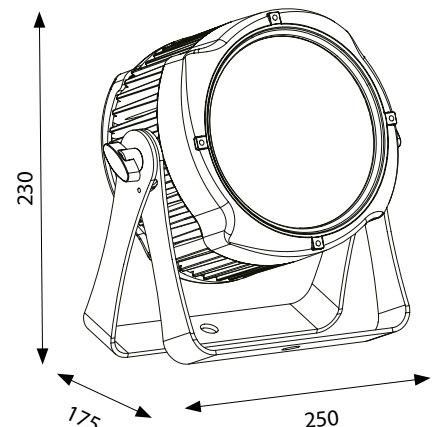

LED PROJECTORS

AQUPAR 12



SG AQUPAR12 - PRODUCT CODE
SG CASEAQUPAR - CASE (6x SG AQUPAR)
SG AQUPARBN - BARNDOR

LIGHT SOURCE

- 12x12W RGBWA-UV led
- LED lifespan: >50.000h
- LED refresh frequency: >400Hz flicker free

OPTIC SYSTEM

- Beam angle: 25°

COLOR SYSTEM

- RGBWA-UV full color mixing
- Infinite chromatic possibilities and color temperature control

EFFECTS

- Linear Dimmer 0-100%
- Electronic strobe: 1-20 flashes/s with adjustable speed
- Color macros selectable via DMX

CONTROL AND PROGRAMMING

- 4 DMX configurations available: 3/6/8/13 channels
- Key lock password for display lock
- USITT DMX 512 protocol
- Master / Slave mode
- Automatic mode with 21 different programs selectable from the display with independent adjustment of the speed and strobe
- Color mode with independent adjustment of single color with 70 different selections
- 11 white balance selections
- 4 dimmer curves

STRUCTURE AND CABINET


- Die cast aluminum housing, black color
- Color LCD display
- Front tempered glass
- Mounting points: double bracket for suspension or floor mount
- IP rating: IP65
- IP65 DMX 3-poles XLR In/Out connectors
- Convection cooling system without fans

POWER SUPPLY

- Input Voltage: AC~100-240V, 50/60 Hz
- Switching power supply unit
- Max power: 145W @ 230VAC
- IP65 True ONE In/Out connectors

WEIGHT AND DIMENSIONS

- Net weight: 4,8 kg
- Dimensions: 300x215x290 mm

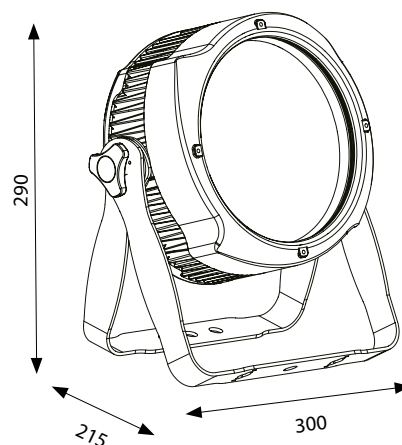



LED PROJECTORS

AQUPAR 18



SG AQUPAR18 - PRODUCT CODE
SG CASEAQUPAR - CASE (6x SG AQUPAR)
SG AQUPARBN - BARNDOR

LIGHT SOURCE

- 18x10W RGBW led
- LED lifespan: >50.000h
- LED refresh frequency: >400Hz flicker free

OPTIC SYSTEM

- Beam angle: 25°

COLOR SYSTEM

- RGBW full color mixing
- Infinite chromatic possibilities and color temperature control

EFFECTS

- Linear Dimmer 0-100%
- Electronic strobe: 1-20 flashes/s with adjustable speed
- Color macros selectable via DMX

CONTROL AND PROGRAMMING

- 4 DMX configurations available: 3/4/6/11 channels
- Key lock password for display lock
- USITT DMX 512 protocol
- Master / Slave mode
- Automatic mode with 21 different programs selectable from the display with independent adjustment of the speed and strobe
- Color mode with independent adjustment of single color with 70 different selections
- 11 white balance selections
- 4 dimmer curves

STRUCTURE AND CABINET


- Die cast aluminum housing, black color
- Color LCD display
- Front tempered glass
- Mounting points: double bracket for suspension or floor mount
- IP rating: IP65
- IP65 DMX 3-poles XLR In/Out connectors
- Convection cooling system without fans


POWER SUPPLY

- Input Voltage: AC~100-240V, 50/60 Hz
- Switching power supply unit
- Max power: 185W @ 230VAC
- IP65 True ONE In/Out connectors

WEIGHT AND DIMENSIONS

- Net weight: 4,8 kg
- Dimensions: 300x215x290 mm

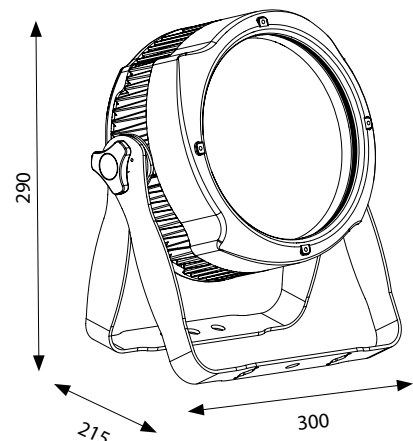

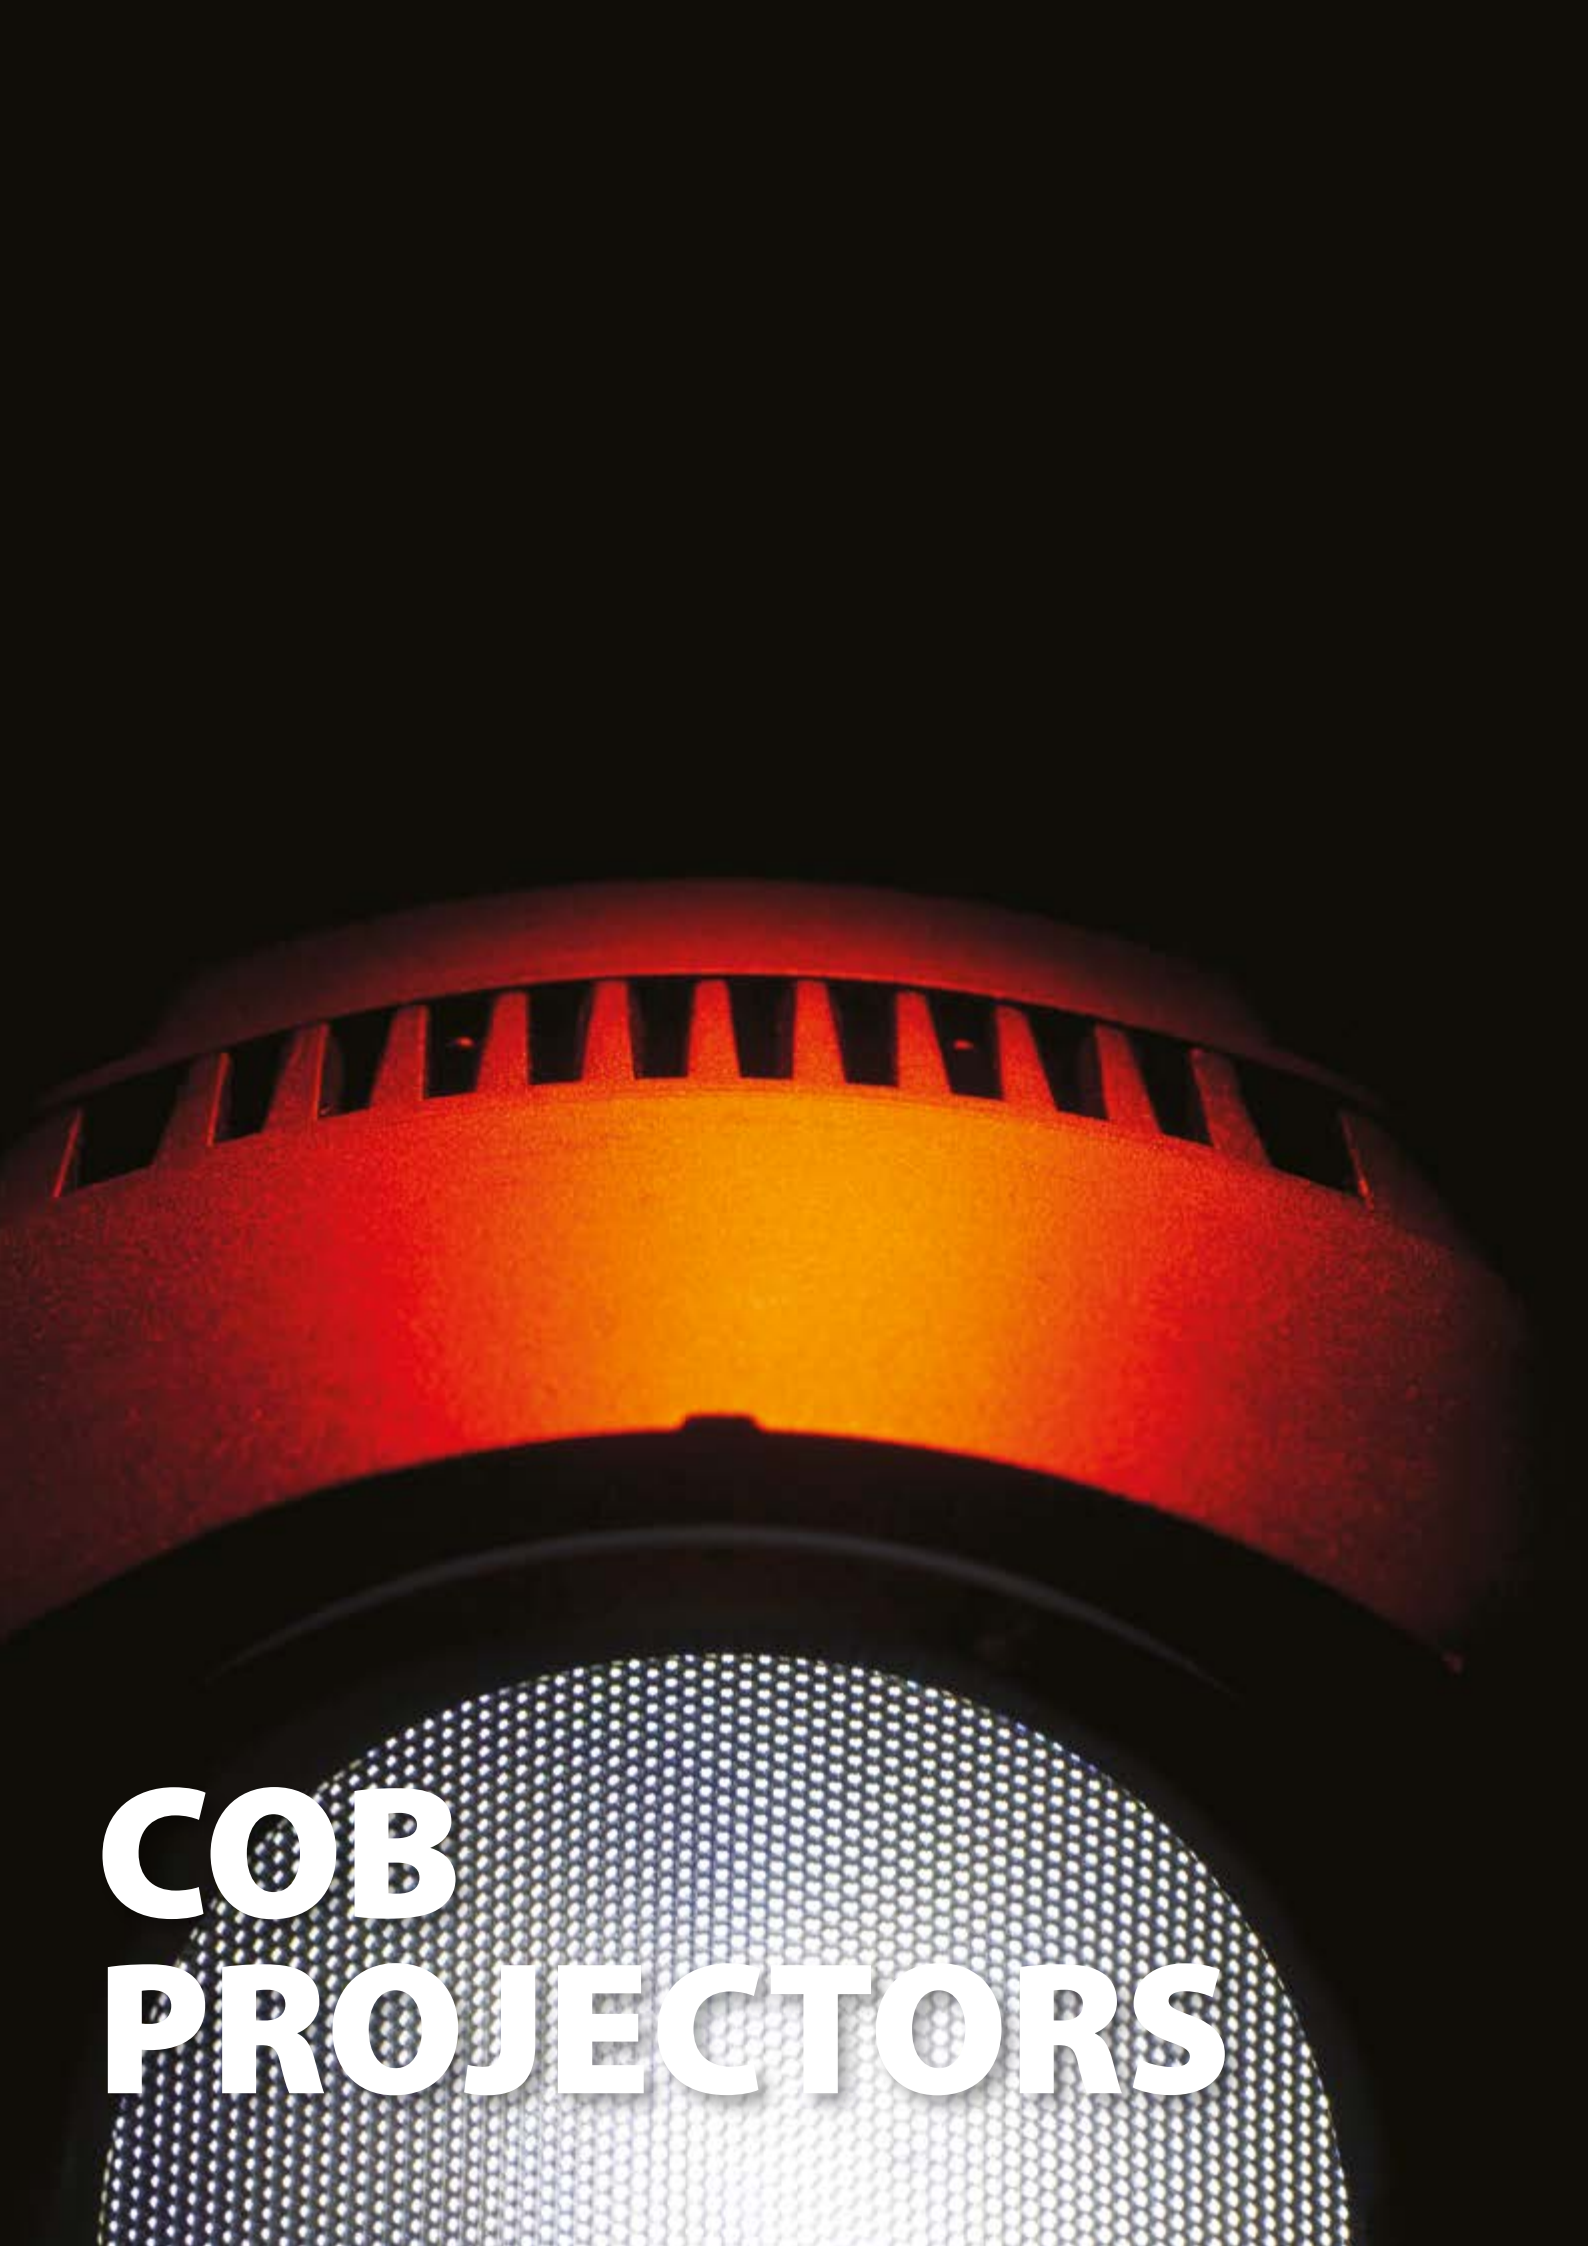

COB PROJECTORS

COB PROJECTORS

SOLPAR C60Z



SG SOLPARC60Z - PRODUCT CODE
SG CASESOLPAR60 - CASE (6x SG SOLPARC60)
SG SOLPARC60BN - BARNDOOR

LIGHT SOURCE

- 1x60W RGBW COB led
- LED lifespan: >50.000h
- LED refresh frequency: >400Hz flicker-free

OPTIC SYSTEM

- Beam angle: motorized zoom from 15° to 40°

COLOR SYSTEM

- RGBW full color mixing
- Infinite chromatic possibilities

EFFECTS

- Linear dimmer 0-100%
- Adjustable strobe
- Color Macros selectable from DMX

CONTROL AND PROGRAMMING

- 4 DMX configuration available: 3/5/7/9 channels
- Key password for display settings lock
- USITT DMX 512 protocol
- Master/Slave mode
- Macro mode with 63 built-in programs selectable from the display
- Play/Edit User Mode with the possibility to run and edit 20 timed programs
- 5 dimmer curves

STRUCTURE AND CABINET


- Die cast aluminum housing, black color
- Blue LCD graphic display
- Soft touch buttons
- Tempered front glass
- "Light up" positioning without brackets
- IP rating: IP65
- IP65 DMX 3/5-poles XLR In/Out connectors
- Convection cooling system without fans
- Optional barn door (code:SG SOLPARC60BN)

POWER SUPPLY

- Input Voltage: AC~100-240V, 50/60 Hz
- Switching power supply unit
- Max power: 78W @ 230VAC
- IP65 True ONE In/Out power connections
- Power supply cable included

WEIGHT AND DIMENSIONS

- Net weight: 5,5 kg
- Dimensions: 280x300x280 mm

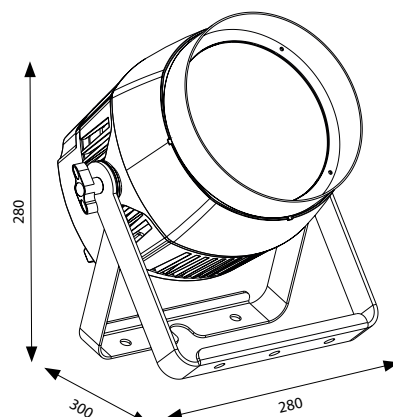

COB PROJECTORS

SOLPAR C150Z



SG SOLPARC150Z - PRODUCT CODE
SG CASESOLPAR150 - CASE (6x SG SOLPARC150)
SG SOLPARC150BN - BARNDOR

LIGHT SOURCE

- 1x120W RGBW COB led
- LED lifespan: >50.000h
- LED refresh frequency: >400Hz flicker-free

OPTIC SYSTEM

- Beam angle: motorized zoom from 15° to 40°

COLOR SYSTEM

- RGBW full color mixing
- Infinite chromatic possibilities

EFFECTS

- Linear dimmer 0-100%
- Adjustable strobe
- Color Macros selectable from DMX

CONTROL AND PROGRAMMING

- 4 DMX configuration available: 3/5/7/9 channels
- Key password for display settings lock
- USITT DMX 512 protocol
- Master/Slave mode
- Macro mode with 63 built-in programs selectable from the display
- Play/Edit User Mode with the possibility to run and edit 20 timed programs
- 5 dimmer curves

STRUCTURE AND CABINET


- Die cast aluminum housing, black color
- Blue LCD graphic display
- Soft touch buttons
- Tempered front glass
- "Light up" positioning without brackets
- IP rating: IP65
- IP65 DMX 3/5-poles XLR In/Out connectors
- Convection cooling system without fans
- Optional barndoor (code:SG SOLPARC150BN)

POWER SUPPLY

- Input Voltage: AC~100-240V, 50/60 Hz
- Switching power supply unit
- Max power: 135W @ 230VAC
- IP65 True ONE In/Out power connections
- Power supply cable included

WEIGHT AND DIMENSIONS

- Net weight: 9,2 kg
- Dimensions: 355x330x330 mm

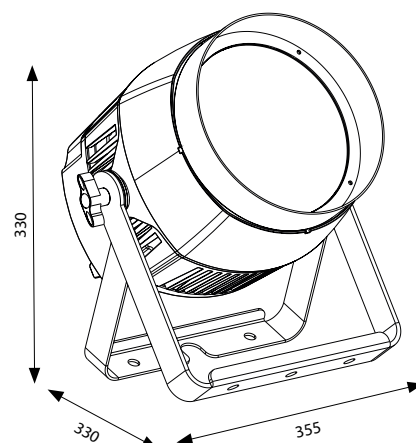



LED BATTERY PROJECTORS

LED BATTERY PROJECTORS

FLOORBAT Q3



SG FLBATQ3 - PRODUCT CODE
SG FLBATCBOX - CHARGER BOX

LIGHT SOURCE

- 3x12W led RGBWA - UV full color led
- LED lifespan: > 50.000h
- LED refresh frequency: > 400Hz flicker-free

OPTIC SYSTEM

- Beam Angle: 15°

COLOR SYSTEM

- RGBWA-UV full color mixing
- Infinite chromatic possibilities

EFFECTS

- Linear dimmer 0-100%
- Adjustable strobe effect
- Static color mode: manual adjustment for each color
- Manual color mode: static built-in color macros
- Auto mode: built-in automatic programs with adjustable speed
- Sound mode: sound activation with internal microphone with adjustable sensitivity
- 3 dimmer curves

CONTROL AND PROGRAMMING

- 3 DMX configurations available: 6/8/12 channels
- USITT DMX 512 protocol
- Built-in DMX wireless transceiver by Wireless Solutions
- Master/Slave mode
- Auto mode
- IR remote controller included with possibility to recall colors or macros

STRUCTURE AND CABINET


- Metal housing, black color
- OLED display
- Soft touch buttons
- "Light up" positioning with adjustable angle
- IP rating: IP20
- Convection cooling system without fans

POWER SUPPLY

- Power supply: 12,8Vdc, 1,4A
- Rechargeable internal Lithium battery
- Runtime battery: ~ 4 hrs (full ON)
- Max power: 36W

WEIGHT AND DIMENSIONS

- Net weight: 1,6 kg
- Dimensions: 145x145x65 mm

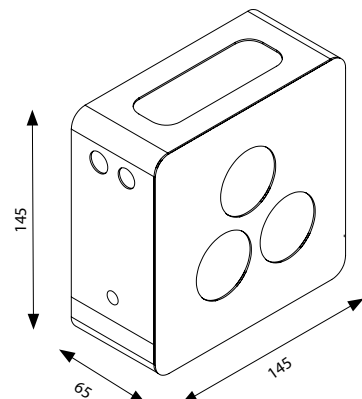

LED BATTERY PROJECTORS

AIR BOX

SG AIRBOX - PRODUCT CODE

TECHNICAL DATA


- DMX Wireless Transmitter/Receiver by Wireless Solution for FLOORBAT Serie
- Number of channels: 512
- Operational mode: Transmitter/Receiver
- Operational Frequency: 2.4 GHZ
- Up to 250m range working distance
- Interference free
- USITT DMX 512 protocol
- DMX 3-poles XLR In/Out connectors
- Modulation method: GFSK
- Adaptive Frequency Hopping
- Error correction

POWER SUPPLY

- Input voltage: 5 Vdc

WEIGHT AND DIMENSIONS

- Weight: 0,39 Kg
- Dimensions: 135x140x34 mm

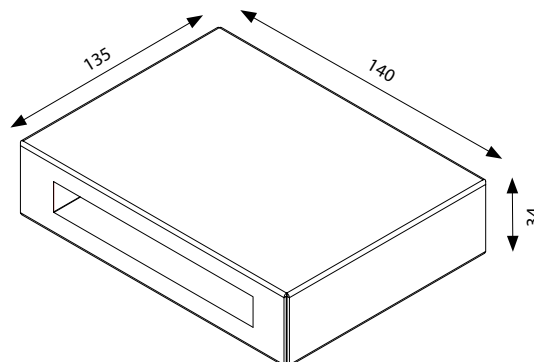



CONTROLLERS

CONTROLLERS QUIVER



SG QUIVER - PRODUCT CODE

SG CASEQUIVER - CASE (1X SG QUIVER)

SG CASEQUIVER1X - CASE (1X SG QUIVER + 1X SG QUIVERX)

SG CASEQUIVER2X - CASE (1X SG QUIVER + 2X SG QUIVERX)

SG QUIVERW12 - WIRELESS TRANSMITTER DMX WSOLUTION

CONTROLS

- Touch-screen TFT LCD 7" colour display
- 6 control keys for editor
- 6 configurable slider as playback, master group
- 6 configurable key as play, flash, DBO
- 12 keys for direct access to playback and CUES
- 4 touch-fader for the control of the attributes during the programming and control of the effects and during playback and manual use
- Joystick for PAN and TILT movement control with lock and fine/super fine keys

DESCRIPTION


- Effective graphic interface able to easily manage programming and playback for a maximum of 144 cue-list organize in 12 pages each having a maximum of 999 cues
- 512 channel for each single universe DMX for the control of dimmer and/or intelligent projector, available simultaneously on XLR connector 3-poles
- Up to 1536 channel with Quiver Expand
- Up to 36 Cue-list run concurrently (with 2 Expand connected)
- "Shape engine" customizable and applicable to different functions (PAN&TILT - DIM - COLOR - GOBO - BLADE)
- Up to 6 different families of "palettes" programmable for a flexible and easy control of intelligent projectors
- Up to 999 Cues for each playback
- Library "personalities" upgradeable, creating fixture via software for PC (included)
- "Palettes" Chris/Gam/Lee and Rosco pre-program usable on all machines with mixing colors RGB or CMY
- Maximum Number of storable cues to show: 999
- RDM ready (Prepared for enlargement of technology)
- Wireless ready (Designed for the insertion of a wireless transmitter sold separately)
- External Power Supply: 100-240V 50-60Hz
- USB Pendrive (included)
- USB Gooseneck led light (included)
- Protective cover (included)

CONNECTIONS

- DMX out: 1x XLR 3-poles
- Expand: 2x RJ45 for expansions connection
- USB 1x port for backup, lamp power supply and update the fixture
- Jack 6,3mm for connecting the pedals for controlling the gearbox scenes

WEIGHT AND DIMENSIONS

- Net weight: 3,4 kg
- Dimensione: 420X98X288 mm

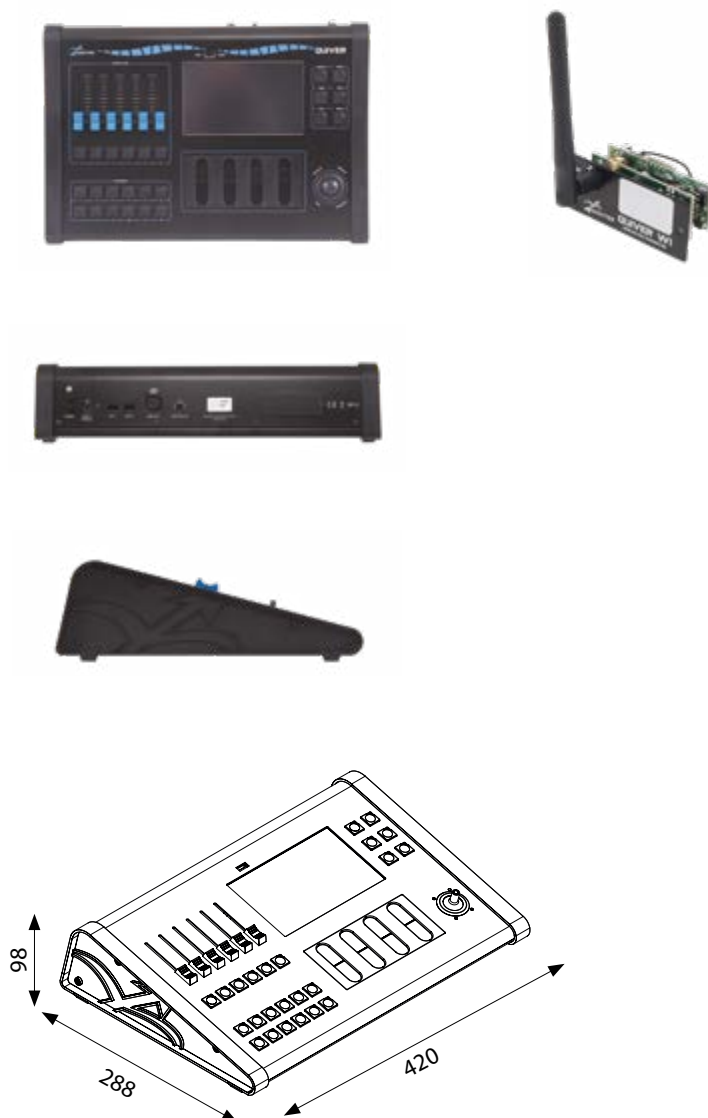

CONTROLLERS

QUIVER X



SG QUIVERX - PRODUCT CODE

CONTROLS

- 6 configurable slider as playback, master group
- 6 configurable key as play, flash, DBO
- 12 keys for direct access to playback and CUES

CONNECTIONS

- DMX out: 1x XLR 3-poles
- Expand: 1x RJ45 for expansions connection to Quiver

WEIGHT AND DIMENSIONS

- Net weight: 1,4 kg
- Dimensions: 196x98x288 mm




EXAMPLE OF CASE




QUIVER + 1 QUIVER X



QUIVER + 2 QUIVER X

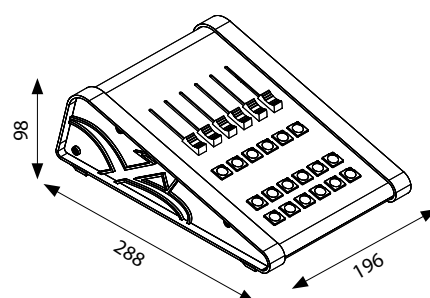




Hazer Heating
is Complete

AMBIENT EFFECTS

AMBIENT EFFECT

HAZER 1500

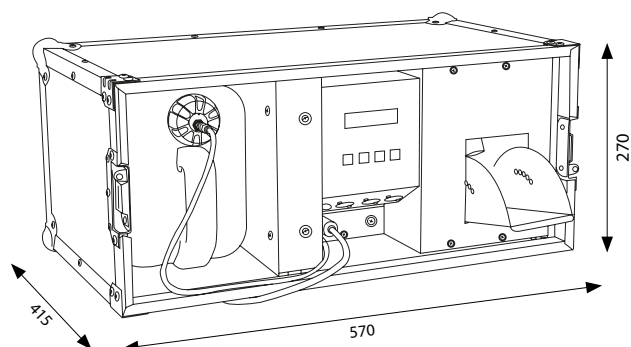

SG H1500 - PRODUCT CODE

EFFECTS

- Hazer effect

CONTROL AND PROGRAMMING

- 2 different DMX channels configurations
- Fan's speed adjustable via software and via DMX
- USITT DMX 512 protocol
- Automatic safety shutdown circuit for pump prevention in case of finished liquid in the circuit
- Heating time: 4 mins
- Smoke output: 1700 cuft
- Continue output
- Manual mode adjustable via display

STRUCTURE AND CABINET

- Metal housing, black color
- Blue LCD graphic display
- Flight case included, for easy transportation
- Comfortable handle for transportation
- High performance pump for optimal emission
- High speed axial fan
- External tank: 6 litres
- DMX 3/5-poles XLR In/Out connectors
- IP rating: IP20
- For best applications and correct function we recommend using Sagitter fluids

POWER SUPPLY

- Input Voltage: AC~230V 50Hz
- Max power: 1500W @ 230VAC
- Power IN connection with powerCON sockets
- Power supply cable 1,5 mt included

WEIGHT AND DIMENSIONS

- Net weight: 18 kg
- Dimensions: 570x415x270 mm

AMBIENT EFFECT

HS - 900



SG HS900 - PRODUCT CODE

EFFECTS

- Hazer effect

CONTROL AND PROGRAMMING

- 1 DMX channel configuration: 2 channels
- Fan's speed adjustable via DMX
- USITT DMX 512 protocol
- Radio remote controller included
- Heating time: 2 mins
- Smoke output: 1300 cuft
- Continue output
- Manual mode adjustable via display

STRUCTURE AND CABINET


- Metal housing, black color
- Blue LCD graphic display
- Led indicator for heating and ready to smoke
- High performance pump for optimal emission
- High speed fan
- External tank: 3 litres
- DMX 3-poles XLR In/Out connectors
- IP rating: IP20
- For best applications and correct function we recommend using Sagitter fluids

POWER SUPPLY

- Input Voltage: AC~230V, 50Hz
- Max Power: 650 W @ 230VAC
- Power IN connection with VDE sockets
- Power supply cable 1,5 mt included

WEIGHT AND DIMENSIONS

- Net weight: 7,3 kg
- Dimensions: 357x335x323 mm

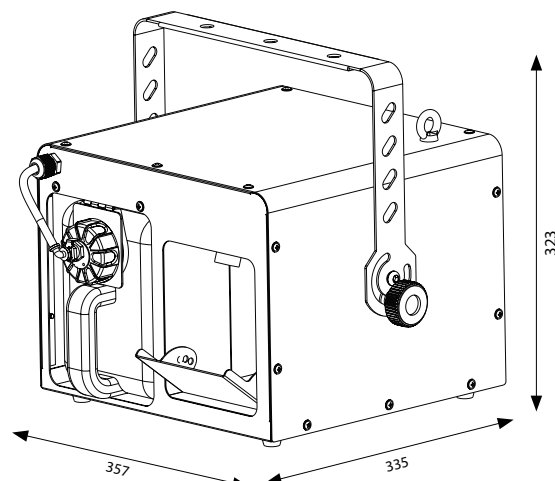







MOVING HEADS

**SG SMTDOT - PRODUCT CODE****LIGHT SOURCE**

- 1x40W RGBW led high brightness
- 12 RGB led for external ring
- LED lifespan: >50.000h

OPTIC SYSTEM

- Beam angle: 4°

COLOR SYSTEM

- LED source RGBW Full color
- Infinite chromatic possibilities

EFFECTS

- Ring color rainbow effect in both directions with adjustable speed
- Linear dimmer 0-100%
- Electronic high speed strobe from 1 to 20 flashes/s, with adjustable speed.
- Color macros selectable from DMX

CONTROL AND PROGRAMMING

- 2 different DMX channels configurations: 16/30 channels
- USITT DMX 512 protocol
- Master/Slave mode selectable
- Sound mode with adjustable sensitivity of microphone
- Reset via DMX

STRUCTURE AND CABINET


- Metal housing and high resistance plastic covers, black color
- Red LED display
- Pan 540° / Tilt 210°
- Mounting points: 1 omega holder + safety ring
- DMX 3-poles XLR In/Out connectors
- IP Rating: IP20
- Forced air fan cooling system

POWER SUPPLY

- Input Voltage: AC~100-240V 50/60Hz
- Switching power supply unit
- Max Power: 60W @ 230VAC
- Power IN connection with VDE sockets
- Power supply cable 1,5 mt included

WEIGHT AND DIMENSIONS

- Net weight: 2,4 kg
- Dimensions: 160x160x230mm

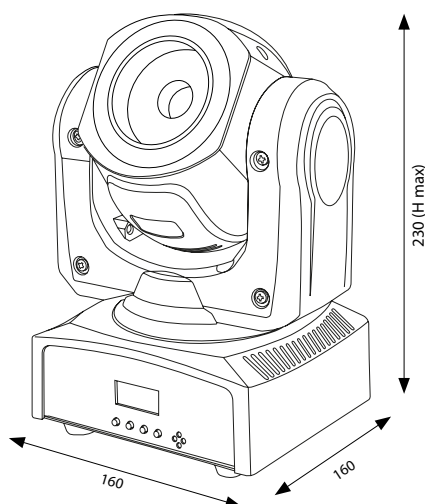

**SG SMTBEAM - PRODUCT CODE****LIGHT SOURCE**

- 1x40W White led high brightness
- LED lifespan: >50.000h

OPTIC SYSTEM

- Beam angle: 4°
- Manual focus

COLOR SYSTEM

- Color wheel: 11 colors + white

EFFECTS

- Gobo wheel: 11 fixed gobos
- Gobo scroll from slow to fast
- Color rainbow effect with adjustable speed
- Linear dimmer 0-100%
- Electronic high speed strobe from 1 to 20 flashes/s, with adjustable speed.
- Pan/Tilt macros selectable from DMX

CONTROL AND PROGRAMMING

- 2 different DMX channels configurations: 9/11 channels
- USITT DMX 512 protocol
- Master/Slave mode
- Sound mode with adjustable sensitivity of microphone
- Reset via DMX

STRUCTURE AND CABINET


- Metal housing and high resistance plastic covers, black color
- Red LED display
- Pan 540° / Tilt 210°
- Mounting points: 1 omega holder + safety ring
- DMX 3-poles XLR In/Out connectors
- IP Rating: IP20
- Forced air fan cooling system

POWER SUPPLY

- Input Voltage: AC~100-240V 50/60Hz
- Switching power supply unit
- Max Power: 50W @ 230VAC
- Power IN connection with VDE sockets
- Power supply cable 1,5 mt included

WEIGHT AND DIMENSIONS

- Net weight: 2,4 kg
- Dimensions: 160x160x230mm

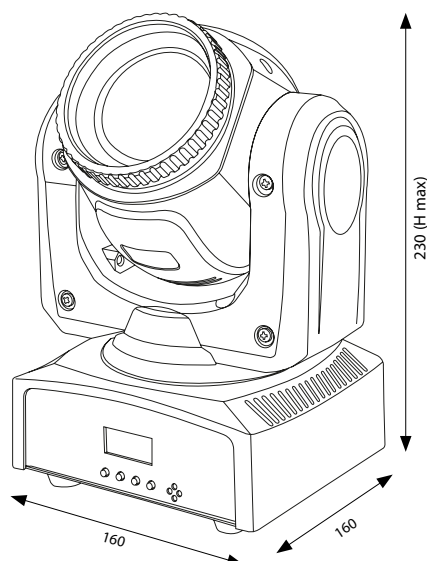

**SG SMTWHPLUS - PRODUCT CODE****LIGHT SOURCE**

- 7x12W led RGBWA Full Color
- LED lifespan: > 50.000h

OPTIC SYSTEM

- Beam Angle: 25°

COLOR SYSTEM

- Led Source 5 in 1 RGBWA Full Color
- Infinite chromatic possibilities

EFFECTS

- Linear dimmer 0-100%
- Adjustable strobe effect
- Color macro selectable from DMX

CONTROL AND PROGRAMMING

- 2 DMX configurations available: 5/14 channels
- USITT DMX 512 protocol
- Master/Slave mode
- Sound mode with adjustable microphone sensitivity
- Auto mode

STRUCTURE AND CABINET


- Metal housing and high resistance plastic covers, black color
- Red LED display
- Pan angle 540°
- Tilt angle 180°
- Mounting points: 1 omega holder + safety ring
- DMX 3-poles XLR In/Out connectors
- IP rating: IP20
- Forced air cooling system

POWER SUPPLY

- Input Voltage: AC~100-240V, 50/60 Hz
- Switching power supply unit
- Max power: 100W @ 230VAC
- Power IN connection with VDE sockets
- Power supply cable 1mt included

WEIGHT AND DIMENSIONS

- Net weight: 3,5 kg
- Dimensions: 175x175x250 mm

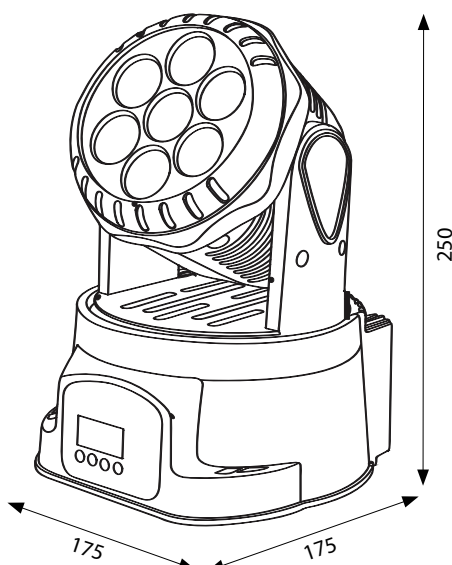

**SG SMTSPOTPLUS - PRODUCT CODE****LIGHT SOURCE**

- 1x60W white LED high brightness
- LED Color temperature: 5600K
- LED lifespan: >50.000h

OPTIC SYSTEM

- Beam angle: 13°
- Manual focus

COLOR SYSTEM

- Color wheel: 7 colors + white

EFFECTS

- Gobo wheel: 7 fixed gobos that can be combined with color wheel
- Gobo shake
- Gobo scroll in both directions
- Color rainbow effect in both directions with adjustable speed
- Linear dimmer 0-100%
- High speed electronic strobe from 1 to 20 flashes/s, adjustable speed
- Color and Pan&Tilt macros selectable from DMX

CONTROL AND PROGRAMMING

- 3 different DMX channels configurations: 5/9/11 channels
- USITT DMX 512 protocol
- Pan&Tilt 8/16 bit selectable resolution
- Master/Slave mode
- Sound mode with adjustable sensitivity of microphone
- Reset via DMX

STRUCTURE AND CABINET


- Metal housing and high resistance plastic covers, black color
- Blue LED display
- Pan 540° / Tilt 230°
- Mounting points: 1 omega holder + safety ring
- DMX 3-poles XLR In/Out connectors
- IP Rating: IP20
- Forced air fan cooling system

POWER SUPPLY

- Input Voltage: AC~100-240V 50/60Hz
- Switching power supply unit
- Max power: 70W @ 230VAC
- Power IN connection with VDE sockets
- Power supply cable 1,5 mt included

WEIGHT AND DIMENSIONS

- Net weight: 3,0 kg
- Dimensions: 205x145x275 mm

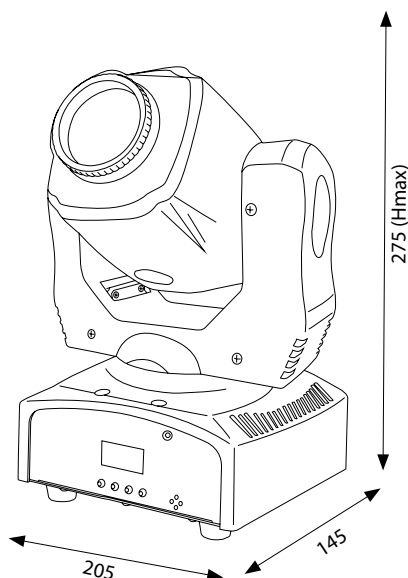

**SG CLSPOT100 - PRODUCT CODE****SG CASECLUB - CASE (4X SG CLSPOT100)****LIGHT SOURCE**

- 1x100W white led high brightness
- Color temperature 5600K
- LED lifespan: >50.000h
- LED Refresh frequency: >400Hz flicker-free

OPTIC SYSTEM

- Beam angle: 9,4°
- Electronic focus
- Luminous flux: 3600 lux @5mt (9.4°)

COLOR SYSTEM

- Color wheel with 7 colors + white

EFFECTS

- 7 dichroic rotating gobos, the gobos are interchangeable with the "plug & play" system. Gobo size 21,8mm / focus 14,5mm
- Bidirectional gobo scroll with adjustable speed
- Gobo shake effect
- Gobo Scroll with variable speed
- 3-facet rotating prism with adjustable speed in both directions
- Color rainbow effect in both directions
- Linear dimmer 0 - 100%
- High speed electronic strobe max.25 flashes/s, with adjustable speed
- Random strobe and pulse dimmer effects with adjustable speed

CONTROL AND PROGRAMMING

- 2 DMX configurations available: 11/13 channels
- USITT DMX 512 protocol
- Pan&Tilt 8/16 bit selectable resolution
- Master / Slave mode
- Sound mode with adjustable microphone sensitivity
- Auto mode with 7 internal programs selectable from display
- Reset via DMX

STRUCTURE AND CABINET


- Metal housing and high resistance plastic covers, black color
- Red LED display
- 3 different Pan&Tilt angle presets: PAN 360°-540°-630°, TILT 90°-180°-270°
- Mounting points: one 1/4-turn lock omega holder
- Automatic repositioning of PAN and TILT after accidental movement
- DMX 3-poles XLR In/Out connectors
- IP Rating: IP20
- Forced air fan cooling system with electronic control

POWER SUPPLY

- Input Voltage: AC~100-240V 50/60Hz
- Switching power supply unit
- Max power: 120W @ 230VAC
- Power IN connection with powerCON sockets
- Power supply cable 1,5 mt included

WEIGHT AND DIMENSIONS

- Net weight: 6,8 kg
- Dimensions: 270x149x366 mm

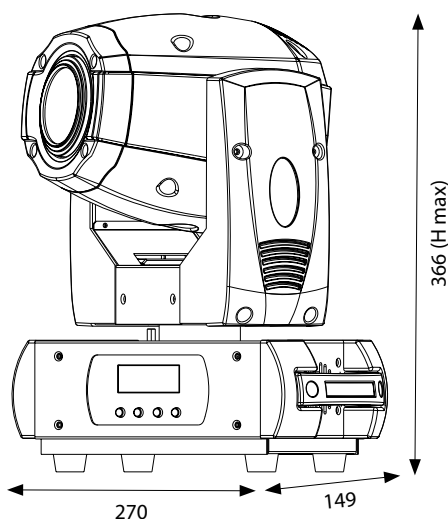



SG CLBEAM100 - PRODUCT CODE
SG CASECLUB - CASE (4X SG CLBEAM100)

LIGHT SOURCE

- 1x100W white led high brightness
- Color temperature 5600K
- LED lifespan: >50.000h
- LED Refresh frequency: >400Hz flicker-free

OPTIC SYSTEM

- Beam angle: 2°
- Electronic focus
- Luminous flux: 21300 lux @5mt (2°)

COLOR SYSTEM

- Color wheel with 14 colors + white

EFFECTS

- Gobo wheel: 17 fixed gobos
- Bidirectional gobo scroll with adjustable speed
- 8-facet rotating prism with adjustable speed
- Color rainbow effect in both directions
- Linear dimmer 0 - 100%
- High speed electronic strobe max.25 flashes/s, with adjustable speed
- Random strobe and pulse dimmer effects with adjustable speed

CONTROL AND PROGRAMMING

- 2 DMX configurations available: 10/12 channels
- USITT DMX 512 protocol
- Pan&Tilt 8/16 bit selectable resolution
- Master / Slave mode
- Sound mode with adjustable microphone sensitivity
- Auto mode with 7 internal programs selectable from display
- Reset via DMX

STRUCTURE AND CABINET


- Metal housing and high resistance plastic covers, black color
- Red LED display
- 3 different Pan&Tilt angle presets: PAN 360°-540°-630°, TILT 90°-180° 270°
- Mounting points: 1 omega holder
- Automatic repositioning of PAN and TILT after accidental movement not controlled by control unit
- DMX 3-poles XLR In/Out connectors
- IP Rating: IP20
- Forced air fan cooling system with electronic control

POWER SUPPLY

- Input Voltage: AC~100-240V 50/60Hz
- Switching power supply unit
- Max power: 120W @ 230VAC
- Power IN connection with powerCON sockets
- Power supply cable 1,5 mt included

WEIGHT AND DIMENSIONS

- Net weight: 7,3 kg
- Dimensions: 270x149x364 mm

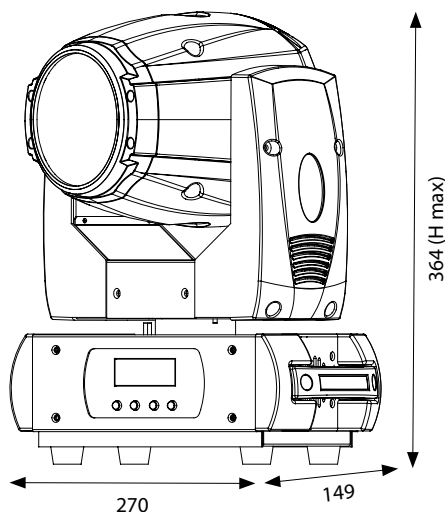

**SG CLWASH - PRODUCT CODE****SG CLWASHKIT** - KIT (2x SG CLWASH + 1 SG CASESCLWASH)**SG CASESCLWASH** - CASE (4x SG CLWASH)**LIGHT SOURCE**

- 36x10W led RGBW Full Color
- LED lifespan: > 50.000h
- LED refresh frequency: > 400Hz flicker-free

OPTIC SYSTEM

- Beam Angle: zoom from 8° to 50°
- Luminous flux: 1.130 lux @ 5mt (8°)

COLOR SYSTEM

- LED source RGBW Full color
- Infinite chromatic possibilities

EFFECTS

- Linear dimmer 0-100%
- Electronic high speed strobe from 1 to 25 flashes/s, with adjustable speed.
- Random strobe and pulse effect with adjustable speed
- Color macros selectable via DMX

CONTROL AND PROGRAMMING

- 1 DMX configurations available: 14 channels
- USITT DMX 512 protocol
- Master/Slave mode
- Sound mode with adjustable microphone sensitivity
- Auto mode
- Reset via DMX

STRUCTURE AND CABINET




- Metal housing and high resistance plastic covers, black color
- Blue LCD graphic display
- Pan angle: 540°
- Tilt angle: 250°
- Mounting points: 1 pair of 1/4-turn lock omega holders
- Automatic repositioning of Pan and Tilt after accidental movements
- DMX 3-poles XLR In/Out connectors
- IP rating: IP20
- Forced air cooling system with electronic control

POWER SUPPLY

- Input Voltage: AC~100-240V, 50/60 Hz
- Switching power supply unit
- Max power: 370W @ 230VAC
- Power IN connection with powerCON sockets
- Power supply cable 1mt included

WEIGHT AND DIMENSIONS

- Net weight: 9,8 kg
- Dimensions: 335x235x442 mm

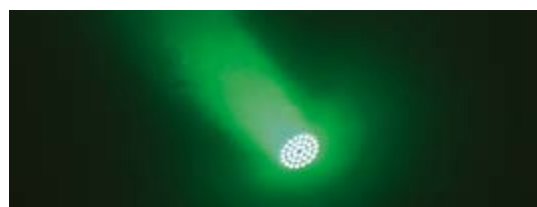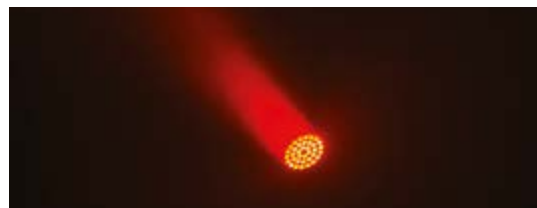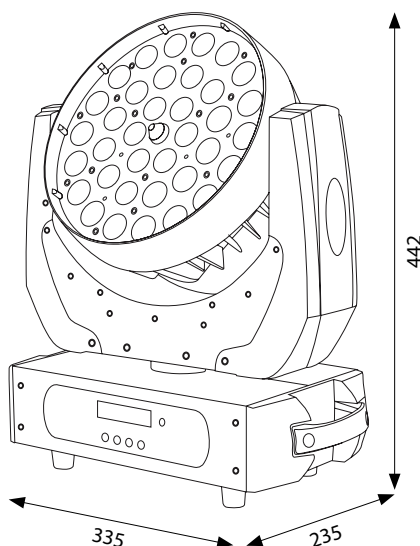

**SG CLBEAM7R - PRODUCT CODE****SG CLBEAM7RKIT** - KIT (2x SG CLBEAM7R + 1x SG CASECLBEAM7R)**SG CASECLBEAM7R** - CASE (2x SG CLBEAM7R)**LIGHT SOURCE**

- Lamp: 7R 230W
- Lamp lifespan: 2000h
- Electronic ballast

OPTIC SYSTEM

- Beam Angle: 3,8°
- Electronic focus
- Luminous flux: 41.700 lux @ 20mt

COLOR SYSTEM

- Color wheel with 14 colors + white (2x CTO - CTB)

EFFECTS

- Fixed gobo wheel with 17 gobos and 6 steps "beam reducer"
- Gobo shacking effect
- Gobo scroll effect with adjustable speed
- 8-facet circular rotating prism with adjustable speed
- Color rainbow effect
- Linear dimmer 0-100%
- Adjustable strobe effect
- Random strobe effect

CONTROL AND PROGRAMMING

- 1 DMX configuration available: 16 channels
- USITT DMX 512 protocol
- Built-in analyzer for easy fault finding

STRUCTURE AND CABINET



- Metal housing and high resistance plastic covers, black color
- Color LCD display
- Pan angle: 540°
- Tilt angle: 270°
- Mounting points: 2 pairs of 1/4-turn locks
- Automatic repositioning of Pan and Tilt after accidental movements
- DMX 3-poles XLR In/Out connectors
- IP rating: IP20
- Forced air cooling system with electronic control

POWER SUPPLY

- Input Voltage: AC~100-240V, 50/60 Hz
- Switching power supply unit
- Max power: 270W @ 230VAC
- Power IN connection with powerCON sockets
- Power supply cable 1mt included

WEIGHT AND DIMENSIONS

- Net weight: 16,5 kg
- Dimensions: 400x340x620mm

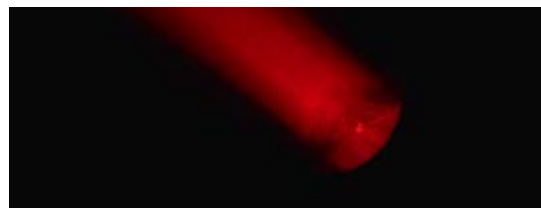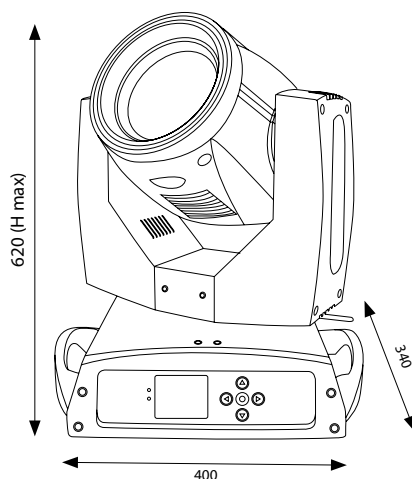



LED PROJECTORS

**SG SLIMPAR7DL - PRODUCT CODE****LIGHT SOURCE**

- 7x12W led RGBWAU Full Color
- LED lifespan: >50.000h
- LED refresh frequency: >400Hz flicker free

OPTIC SYSTEM

- Beam angle: 25°
- Luminous flux: 2290 lux @3mt (25°)

COLOR SYSTEM

- LED source 6 in 1 RGBWAU Full Color
- Infinite chromatic possibilities and colour temperature control
- Color temperature control with Amber color
- "Dark Light" technology LED UV (Ultra Violet)
- 2 color macros can be recalled by DMX

EFFECTS

- Linear Dimmer 0-100%
- Electronic strobe: 1-20 flashes/s with adjustable speed

CONTROL AND PROGRAMMING

- 4 DMX configurations available: 1/6/7/10 channels
- USITT DMX 512 protocol
- Master / Slave mode
- Sound mode with adjustable mic sensitivity
- Static color mode with independent adjustment of strobe
- Automatic mode with 2 different programs selectable from the display with independent adjustment of the speed and strobe
- Color mode with 50 different pre-programmed color macros with independent adjustment of the strobe
- IR remote controller included with possibility to recall colors or macros

STRUCTURE AND CABINET


- High resistance ABS housing, black color
- Red LED display
- Mounting points: double adjustable brackets
- "Light up" positioning without brackets
- DMX 3-poles XLR In/Out connectors
- IP rating: IP20
- Forced air fan cooling system

POWER SUPPLY

- Input Voltage: AC~100-240V 50/60Hz
- Switching power supply unit
- Max power: 100W @ 230VAC
- Power In/Out connection with VDE socket
- Power supply cable 1,5 mt included
- Max 6 pcs linkable @240V

WEIGHT AND DIMENSIONS

- Net weight: 2,1 kg
- Dimensions: 257x130x240 mm

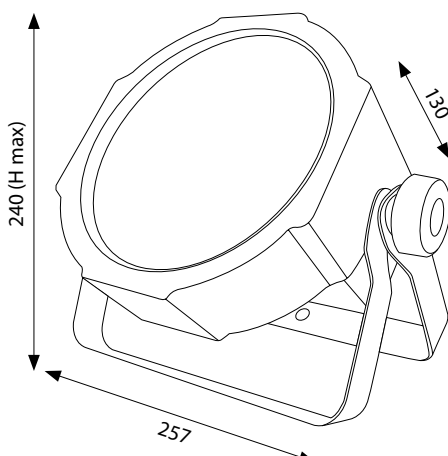

**SG SLIMPAR12DL - PRODUCT CODE****LIGHT SOURCE**

- 12x12W led RGBWAU Full Color
- LED lifespan: >50.000h
- LED refresh frequency: >400Hz flicker free

OPTIC SYSTEM

- Beam angle: 25°
- Luminous flux: 1210 lux @5mt (25°)

COLOR SYSTEM

- LED source 6 in 1 RGBWAU Full Color
- Infinite chromatic possibilities and colour temperature control
- Color temperature control with Amber color
- "Dark Light" technology LED UV (Ultra Violet)
- 2 color macros can be recalled by DMX

EFFECTS

- Linear Dimmer 0-100%
- Electronic strobe: 1-20 flashes/s with adjustable speed

CONTROL AND PROGRAMMING

- 4 DMX configurations available: 1/6/7/10 channels
- USITT DMX 512 protocol
- Master / Slave mode
- Sound mode with adjustable mic sensitivity
- Static color mode with independent adjustment of strobe
- Automatic mode with 2 different programs selectable from the display with independent adjustment of the speed and strobe
- Color mode with 50 different pre-programmed color macros with independent adjustment of the strobe
- IR remote controller included with possibility to recall colors or macros

STRUCTURE AND CABINET


- High resistance ABS housing, black color
- Red LED display
- Mounting points: double adjustable brackets
- "Light up" positioning without brackets
- DMX 3-poles XLR In/Out connectors
- IP rating: IP20
- Forced air fan cooling system


POWER SUPPLY

- Input Voltage: AC~100-240V 50/60Hz
- Switching power supply unit
- Max power: 160W @ 230VAC
- Power In/Out connection with VDE socket
- Power supply cable 1,5 mt included
- Max 4 pcs linkable @240V

WEIGHT AND DIMENSIONS

- Net weight: 2,1 kg
- Dimensions: 257x130x240 mm

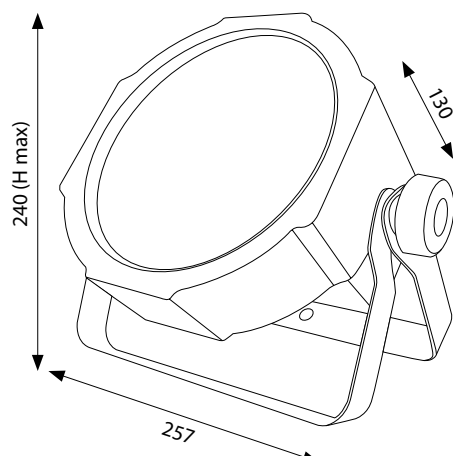

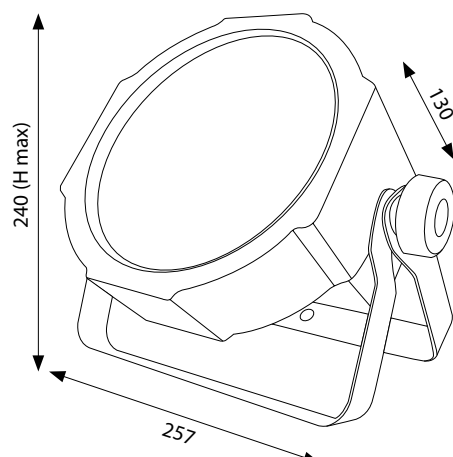**SG SLIMPAR12 - PRODUCT CODE****LIGHT SOURCE**

- 12x8W led RGBW Full Color
- LED lifespan: >50.000h
- LED refresh frequency: >400Hz flicker free

OPTIC SYSTEM

- Beam angle: 25°
- Luminous flux: 1060 lux @5mt (25°)

COLOR SYSTEM

- LED source 4 in 1 RGBW Full Color
- Infinite chromatic possibilities and colour temperature control
- 2 color macros can be recalled by DMX

EFFECTS

- Linear Dimmer 0-100%
- Electronic strobe: 1-20 flashes/s with adjustable speed

CONTROL AND PROGRAMMING

- 4 DMX configurations available: 1/4/5/8 channels
- USITT DMX 512 protocol
- Master / Slave mode
- Sound mode with adjustable mic sensitivity
- Static color mode with independent adjustment of strobe
- Automatic mode with 2 different programs selectable from the display with independent adjustment of the speed and strobe
- Color mode with 50 different pre-programmed color macros with independent adjustment of the strobe
- IR remote controller included with possibility to recall colors or macros

STRUCTURE AND CABINET

- High resistance ABS housing, black color
- Red LED display
- Mounting points: double adjustable brackets
- "Light up" positioning without brackets
- DMX 3-poles XLR In/Out connectors
- IP rating: IP20
- Forced air fan cooling system


POWER SUPPLY

- Input Voltage: AC~100-240V 50/60Hz
- Switching power supply unit
- Max power: 110W @ 230VAC
- Power In/Out connection with VDE socket
- Power supply cable 1,5 mt included
- Max 6 pcs linkable @240V

WEIGHT AND DIMENSIONS

- Net weight: 2,1 kg
- Dimensions: 257x130x240 mm

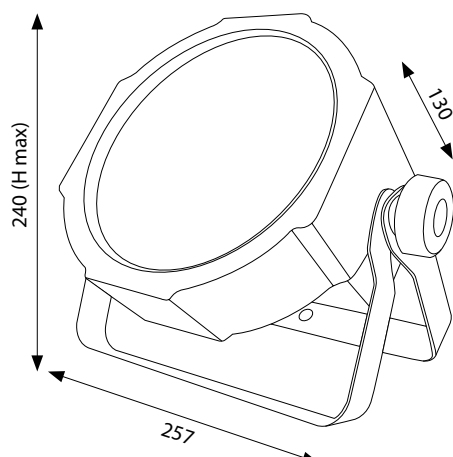

**SG SLIMPAR18 - PRODUCT CODE****LIGHT SOURCE**

- 18x3W led RGB Full Color
- LED lifespan: >50.000h
- LED refresh frequency: >400Hz flicker free

OPTIC SYSTEM

- Beam angle: 25°
- Luminous flux: 1140 lux @5mt (25°)

COLOR SYSTEM

- LED source 3 in 1 RGB Full Color
- Infinite chromatic possibilities and colour temperature control
- 2 color macros can be recalled by DMX

EFFECTS

- Linear Dimmer 0-100%
- Electronic strobe: 1-20 flashes/s with adjustable speed

CONTROL AND PROGRAMMING

- 4 DMX configurations available: 1/3/4/7 channels
- USITT DMX 512 protocol
- Master / Slave mode
- Sound mode with adjustable mic sensitivity
- Static color mode with independent adjustment of strobe
- Automatic mode with 2 different programs selectable from the display with independent adjustment of the speed and strobe
- Color mode with 50 different pre-programmed color macros with independent adjustment of the strobe
- IR remote controller included with possibility to recall colors or macros

STRUCTURE AND CABINET

- High resistance ABS housing, black color
- Red LED display
- Mounting points: double adjustable brackets
- "Light up" positioning without brackets
- DMX 3-poles XLR In/Out connectors
- IP rating: IP20
- Forced air fan cooling system

POWER SUPPLY

- Input Voltage: AC~100-240V 50/60Hz
- Switching power supply unit
- Max power: 70W @ 230VAC
- Power In/Out connection with VDE socket
- Power supply cable 1,5 mt included
- Max 6 pcs linkable @240V

WEIGHT AND DIMENSIONS

- Net weight: 2,1 kg
- Dimensions: 257x130x240 mm



SG SLIMPARCOB100 - PRODUCT CODE

**LIGHT SOURCE**

- 1x100W RGBW COB led
- LED lifespan: >50.000h
- LED refresh frequency: >400Hz flicker-free

OPTIC SYSTEM

- Beam angle: 50°

COLOR SYSTEM

- RGBW full color mixing
- Infinite chromatic possibilities

EFFECTS

- Fine linear Dimmer 0-100%
- Adjustable strobe 1-10 flash/s

CONTROL AND PROGRAMMING

- 1 DMX configuration available: 7 channels
- USITT DMX 512 protocol
- Master/Slave mode
- Sound Mode
- Automatic mode
- IR remote control
- IR remote controller included with possibility to recall colors or macros

STRUCTURE AND CABINET


- High resistance ABS housing, black color
- Red led display
- Mounting points: double adjustable brackets
- "Light-up" positioning without brackets
- DMX 3-poles XLR In/Out connectors
- IP rating: IP20
- Forced air fan cooling system

POWER SUPPLY

- Input Voltage: AC~100-240V, 50/60 Hz
- Switching power supply unit
- Max power: 105W @ 230VAC
- Power In/Out connection with VDE socket
- Power supply cable included

WEIGHT AND DIMENSIONS

- Net weight: 1,9 kg
- Dimensions: 260x180x240 mm

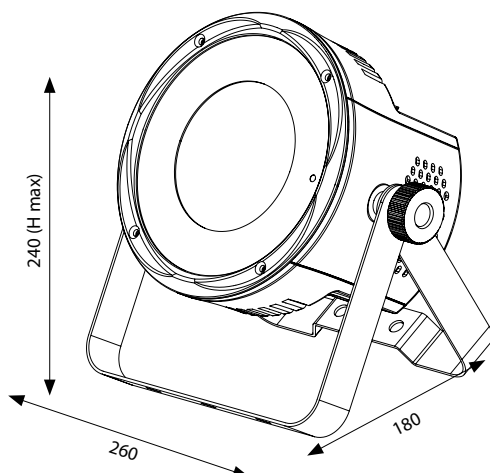

**SG SLIMPAR6BAT - PRODUCT CODE****SG CASESLIMPARBAT - CASE (6X SG SLIMPAR6BAT)****LIGHT SOURCE**

- 6x10W led RGBW Full Color
- LED lifespan: >50.000h
- LED refresh frequency: >400Hz flicker free

OPTIC SYSTEM

- Beam angle: 15°
- Luminous flux: 1005 lux @5mt (full on)

COLOR SYSTEM

- LED source 4 in 1 RGBW Full Color
- Infinite chromatic possibilities

EFFECTS

- Linear Dimmer 0-100%
- Electronic strobe: 1-20 flashes/s with adjustable speed

CONTROL AND PROGRAMMING

- 3 DMX configurations available: 1/4/7 channels
- USITT DMX 512 protocol
- Built-in DMX wireless (DMX wireless transmitter SG AIRBOX, sold separately)
- Master / Slave mode
- Sound mode with 2 different programs and adjustable mic sensitivity
- Static color mode with strobe adjustment
- Automatic mode with 5 different programs selectable from the display with speed adjustment
- Color mode with 51 different pre-programmed color macros
- IR remote controller included

STRUCTURE AND CABINET


- High resistance ABS housing, black color
- Red LED display
- Mounting points: double adjustable brackets
- "Light up" positioning without brackets
- DMX 3-poles XLR In/Out connectors
- IP rating: IP20

POWER SUPPLY

- Input Voltage: AC~100-240V 50/60Hz for normal working and battery recharge
- Switching power supply unit
- Internal rechargeable battery: 12,6VDC
- Capacity: 10 Ah
- Runtime battery: ~ 5 hrs (full ON)
- Charging cycle: ~ 8 hrs (Projector off)
- Max power: 48W @ 230VAC
- Power In/Out connection with VDE socket
- Power supply cable 1,5 mt included

WEIGHT AND DIMENSIONS

- Net weight: 2,5 kg
- Dimensions: 260x180x240 mm

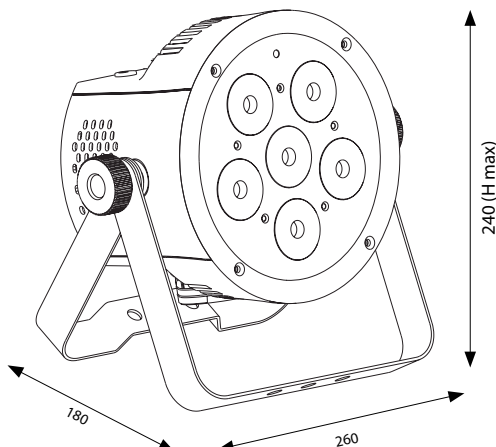



**STAGE
LEDs**



SG HTZLEDC - PRODUCT CODE
SG CASEHTZ - CASE (6x SG HTZLEDC)

LIGHT SOURCE

- 18x8W led RGBW Full Color
- LED lifespan: >50.000h
- LED refresh frequency: >400Hz flicker free

OPTIC SYSTEM

- Beam angle: zoom from 15° to 60°
- Luminous flux: 2250 lux @3mt (15°)

COLOR SYSTEM

- LED source 4 in 1 RGBW Full Color
- Infinite chromatic possibilities and colour temperature control
- Color macros can be recalled by DMX

EFFECTS

- Linear Dimmer 0-100%
- Electronic strobe: 1-25 flashes/s with adjustable speed

CONTROL AND PROGRAMMING

- 6 DMX configurations available: 5/6/6/7/3/13 channels
- 4 selectable dimmer curves
- USITT DMX 512 protocol
- Master / Slave mode
- Sound mode with adjustable mic sensitivity
- Static color mode with independent adjustment of strobe
- Automatic mode with 10 different programs selectable from the display with independent adjustment of the speed and strobe
- Color mode with different pre-programmed color macros

STRUCTURE AND CABINET


- Die cast aluminium housing, black color
- Red LED display
- Mounting points: double adjustable brackets
- DMX 3-poles XLR In/Out connectors
- IP rating: IP20
- Forced air fan cooling system

POWER SUPPLY

- Input Voltage: AC~100-240V 50/60Hz
- Switching power supply unit
- Max power: 160W @ 230VAC

WEIGHT AND DIMENSIONS

- Net weight: 4 kg
- Dimensions: 310x216x325 mm

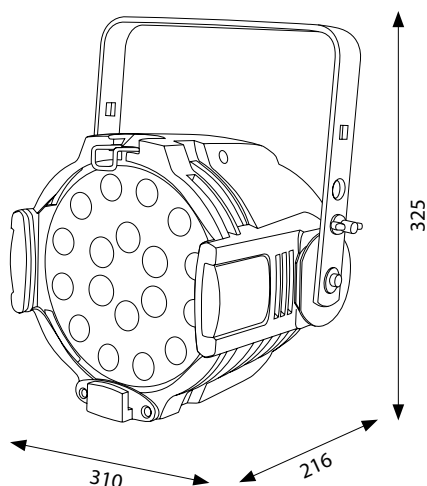



SG HTZLEDCOBW - PRODUCT CODE
SG CASEHTZCOB - CASE (6X SG HTZLEDCOBW)

LIGHT SOURCE

- 1X200W COB led Warm White 3200K
- LED lifespan: >50.000h
- LED refresh frequency: >400Hz flicker free

OPTIC SYSTEM

- Beam angle: 60°
- Luminous flux: 585 lux @ 5m

COLOR SYSTEM

- LED source COB Warm White 3200K

EFFECTS

- High precision linear Dimmer 0-100%
- Electronic strobe: 1-20 flashes/s with adjustable speed

CONTROL AND PROGRAMMING

- 2 DMX configurations available: 1/2 channels
- USITT DMX 512 protocol
- Master / Slave mode

STRUCTURE AND CABINET


- Die cast aluminium housing, black color
- Red LED display
- Barndoor included
- Mounting points: double adjustable brackets
- DMX 3-poles XLR In/Out connectors
- IP rating: IP20
- Forced air fan cooling system

POWER SUPPLY

- Input Voltage: AC~100-240V 50/60Hz
- Switching power supply unit
- Max power: 260W @ 230VAC
- Power In/Out with powerCON connector
- Power supply cable 1,5 mt included

WEIGHT AND DIMENSIONS

- Net weight: 3,6 kg
- Dimensions: 305x240x300 mm

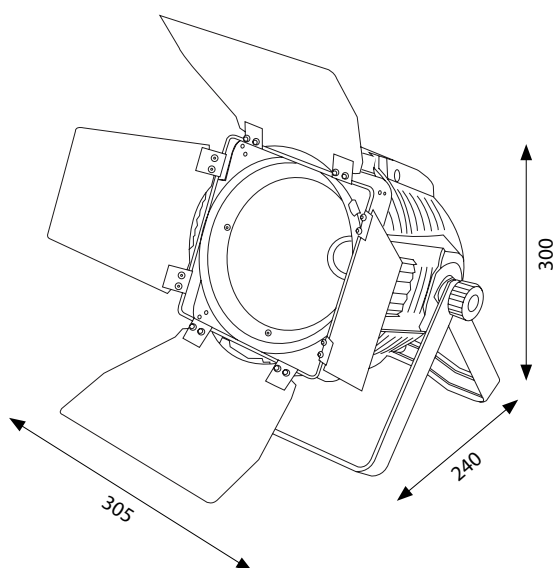



SG HTZLEDCOBC - PRODUCT CODE
SG CASEHTZCOB - CASE (6X SG HTZLEDCOBC)

LIGHT SOURCE

- 1X200W COB led RGBW
- LED lifespan: >50.000h
- LED refresh frequency: >400Hz flicker free

OPTIC SYSTEM

- Beam angle: 60°
- Luminous flux: 405 lux @ 5mt (full on)

COLOR SYSTEM

- LED source 4 in 1 RGBW Full Color
- Infinite chromatic possibilities

EFFECTS

- High precision linear Dimmer 0-100%
- Electronic strobe: 1-20 flashes/s with adjustable speed

CONTROL AND PROGRAMMING

- 2 DMX configurations available: 4/8 channels
- USITT DMX 512 protocol
- Master / Slave mode
- Sound mode
- Color mode with macros and 11 different white temperature programs
- Automatic mode with 10 different programs selectable from the display with speed adjustment

STRUCTURE AND CABINET


- Die cast aluminium housing, black color
- Red LED display
- Barndoors included
- Mounting points: double adjustable brackets
- DMX 3-poles XLR In/Out connectors
- IP rating: IP20
- Forced air fan cooling system


POWER SUPPLY

- Input Voltage: AC~100-240V 50/60Hz
- Switching power supply unit
- Max power: 260W @ 230VAC
- Power In/Out with powerCON connector
- Power supply cable 1,5 mt included

WEIGHT AND DIMENSIONS

- Net weight: 3,6 kg
- Dimensions: 305x240x300 mm

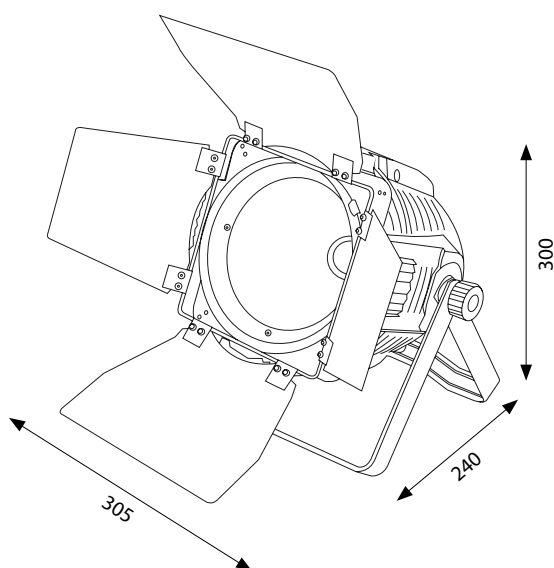

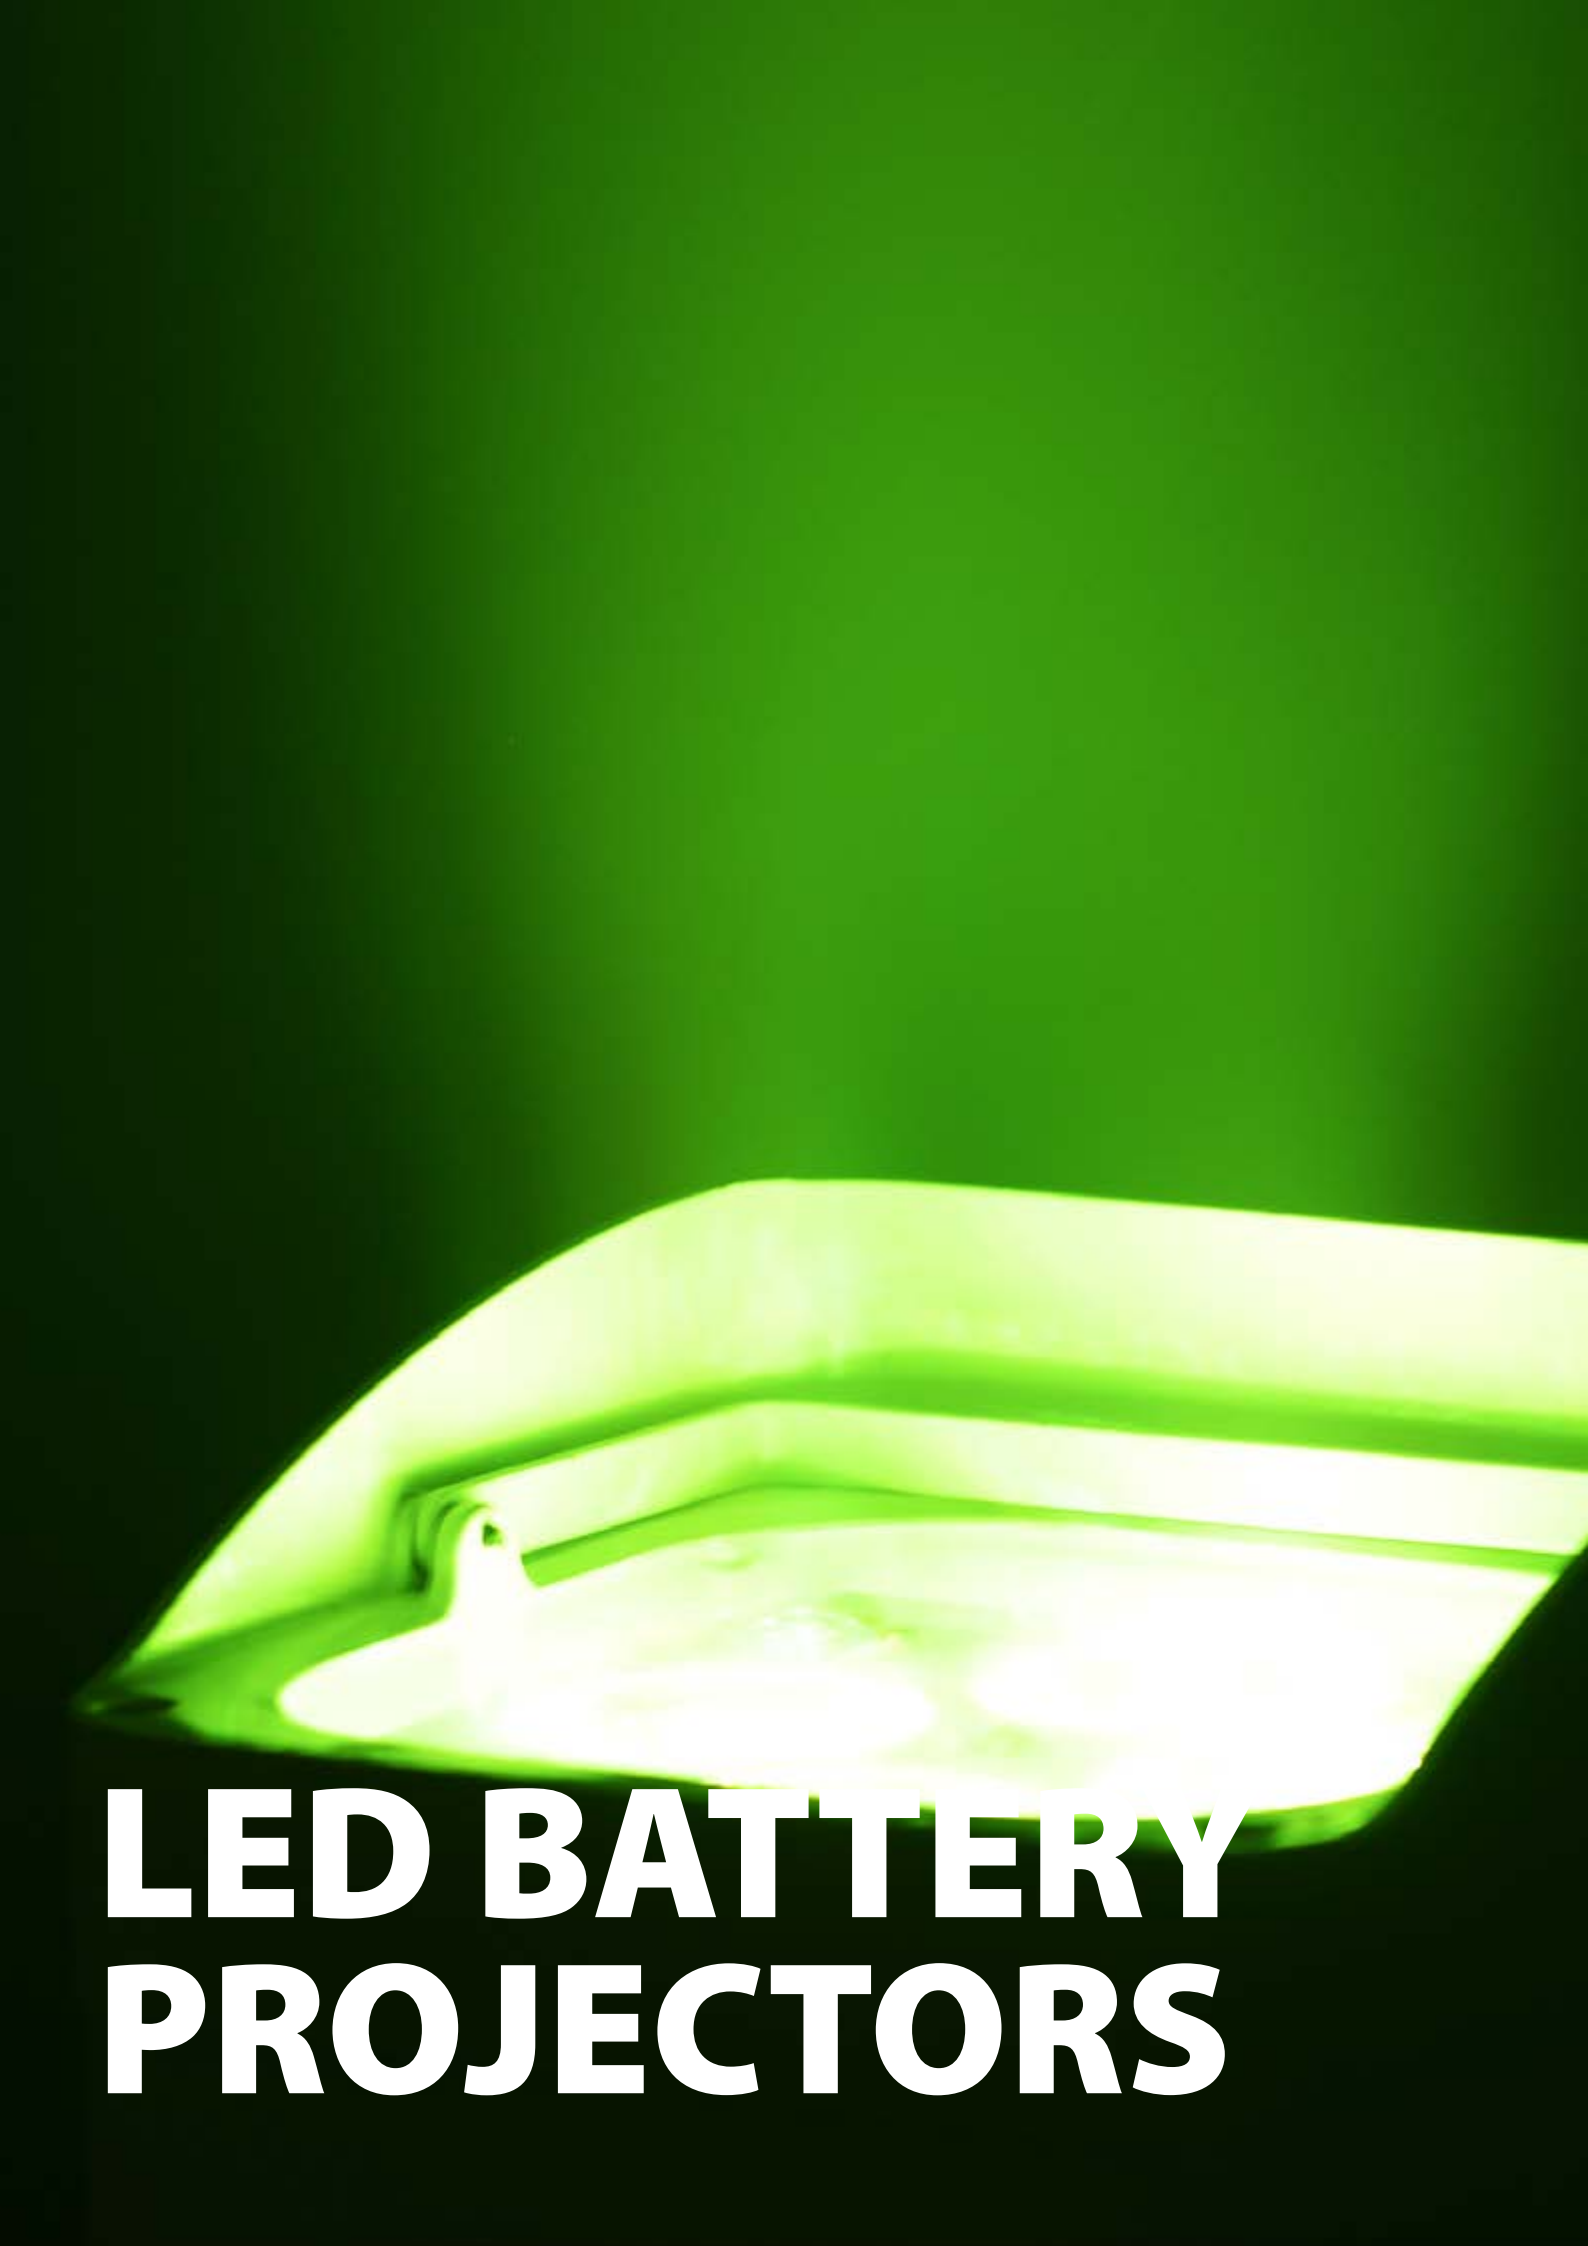

LED BATTERY PROJECTORS



SG BATI4DLH - PRODUCT CODE

SG BATI4TX - DMX WIRELESS TRANSMITTER

SG BATI4DLHKIT - KIT (8X SG BATI4DLH + 1X SG CASEBATI4DLH)

SG CASEBATI4DLH - CASE WITH CHARGE SYSTEM (8X SG BATI4DLH)

SG BAGBATI4DLH - SOFT BAG (4X SG BATI4DLH)

SG CVMBATI4DLH - MIRROR COVER FOR SG BATI4DLH

SG CVWBATI4DLH - WHITE COVER FOR SG BATI4DLH

SG CVRBATI4DLH - RAIN COVER FOR SG BATI4DLH

LIGHT SOURCE

- 4x12W led RGBWA-UV
- LED lifespan: > 50.000h
- LED refresh frequency: > 400Hz flicker-free

OPTIC SYSTEM

- Beam Angle: 15°

COLOR SYSTEM

- LED source RGBWA-UV
- Infinite chromatic possibilities

EFFECTS

- Linear dimmer 0-100%
- Adjustable strobe effect
- Static color mode: manual adjustment for each color
- Manual color mode: static built-in color macros
- Auto mode: built-in automatic programs with adjustable speed
- Sound mode: sound activation with internal microphone with adjustable sensitivity

CONTROL AND PROGRAMMING

- 3 DMX configurations available: 6/6b/10 channels
- USITT DMX 512 protocol
- Built-in Wi-Fi protocol for direct control by smartphone with App
- Built-in DMX wireless transceiver (DMX wireless transmitter SG BATI4TX, sold separately)
- Remote controller included
- Master/Slave mode
- Auto mode

STRUCTURE AND CABINET


- Metal housing, black color
- LCD graphic color display
- "Light up" positioning with adjustable angle
- IP rating: IP20
- DMX 3-poles XLR In/Out connectors
- Convection cooling system without fans


POWER SUPPLY

- Input Voltage: AC~100-240V, 50/60 Hz, for normal working and battery recharge
- Switching power supply unit
- Internal rechargeable battery: 14,8VDC
- Capacity: 7,8 Ah
- Runtime battery: ~ 5 hrs (full ON)
- Charging cycle: ~ 5 hrs (Projector off)
- Power consumption: 50W @ 230VAC
- Power In/Out connection with powerCON socket

WEIGHT AND DIMENSIONS

- Net weight: 3,5 kg
- Dimensions: 140x140x205 mm



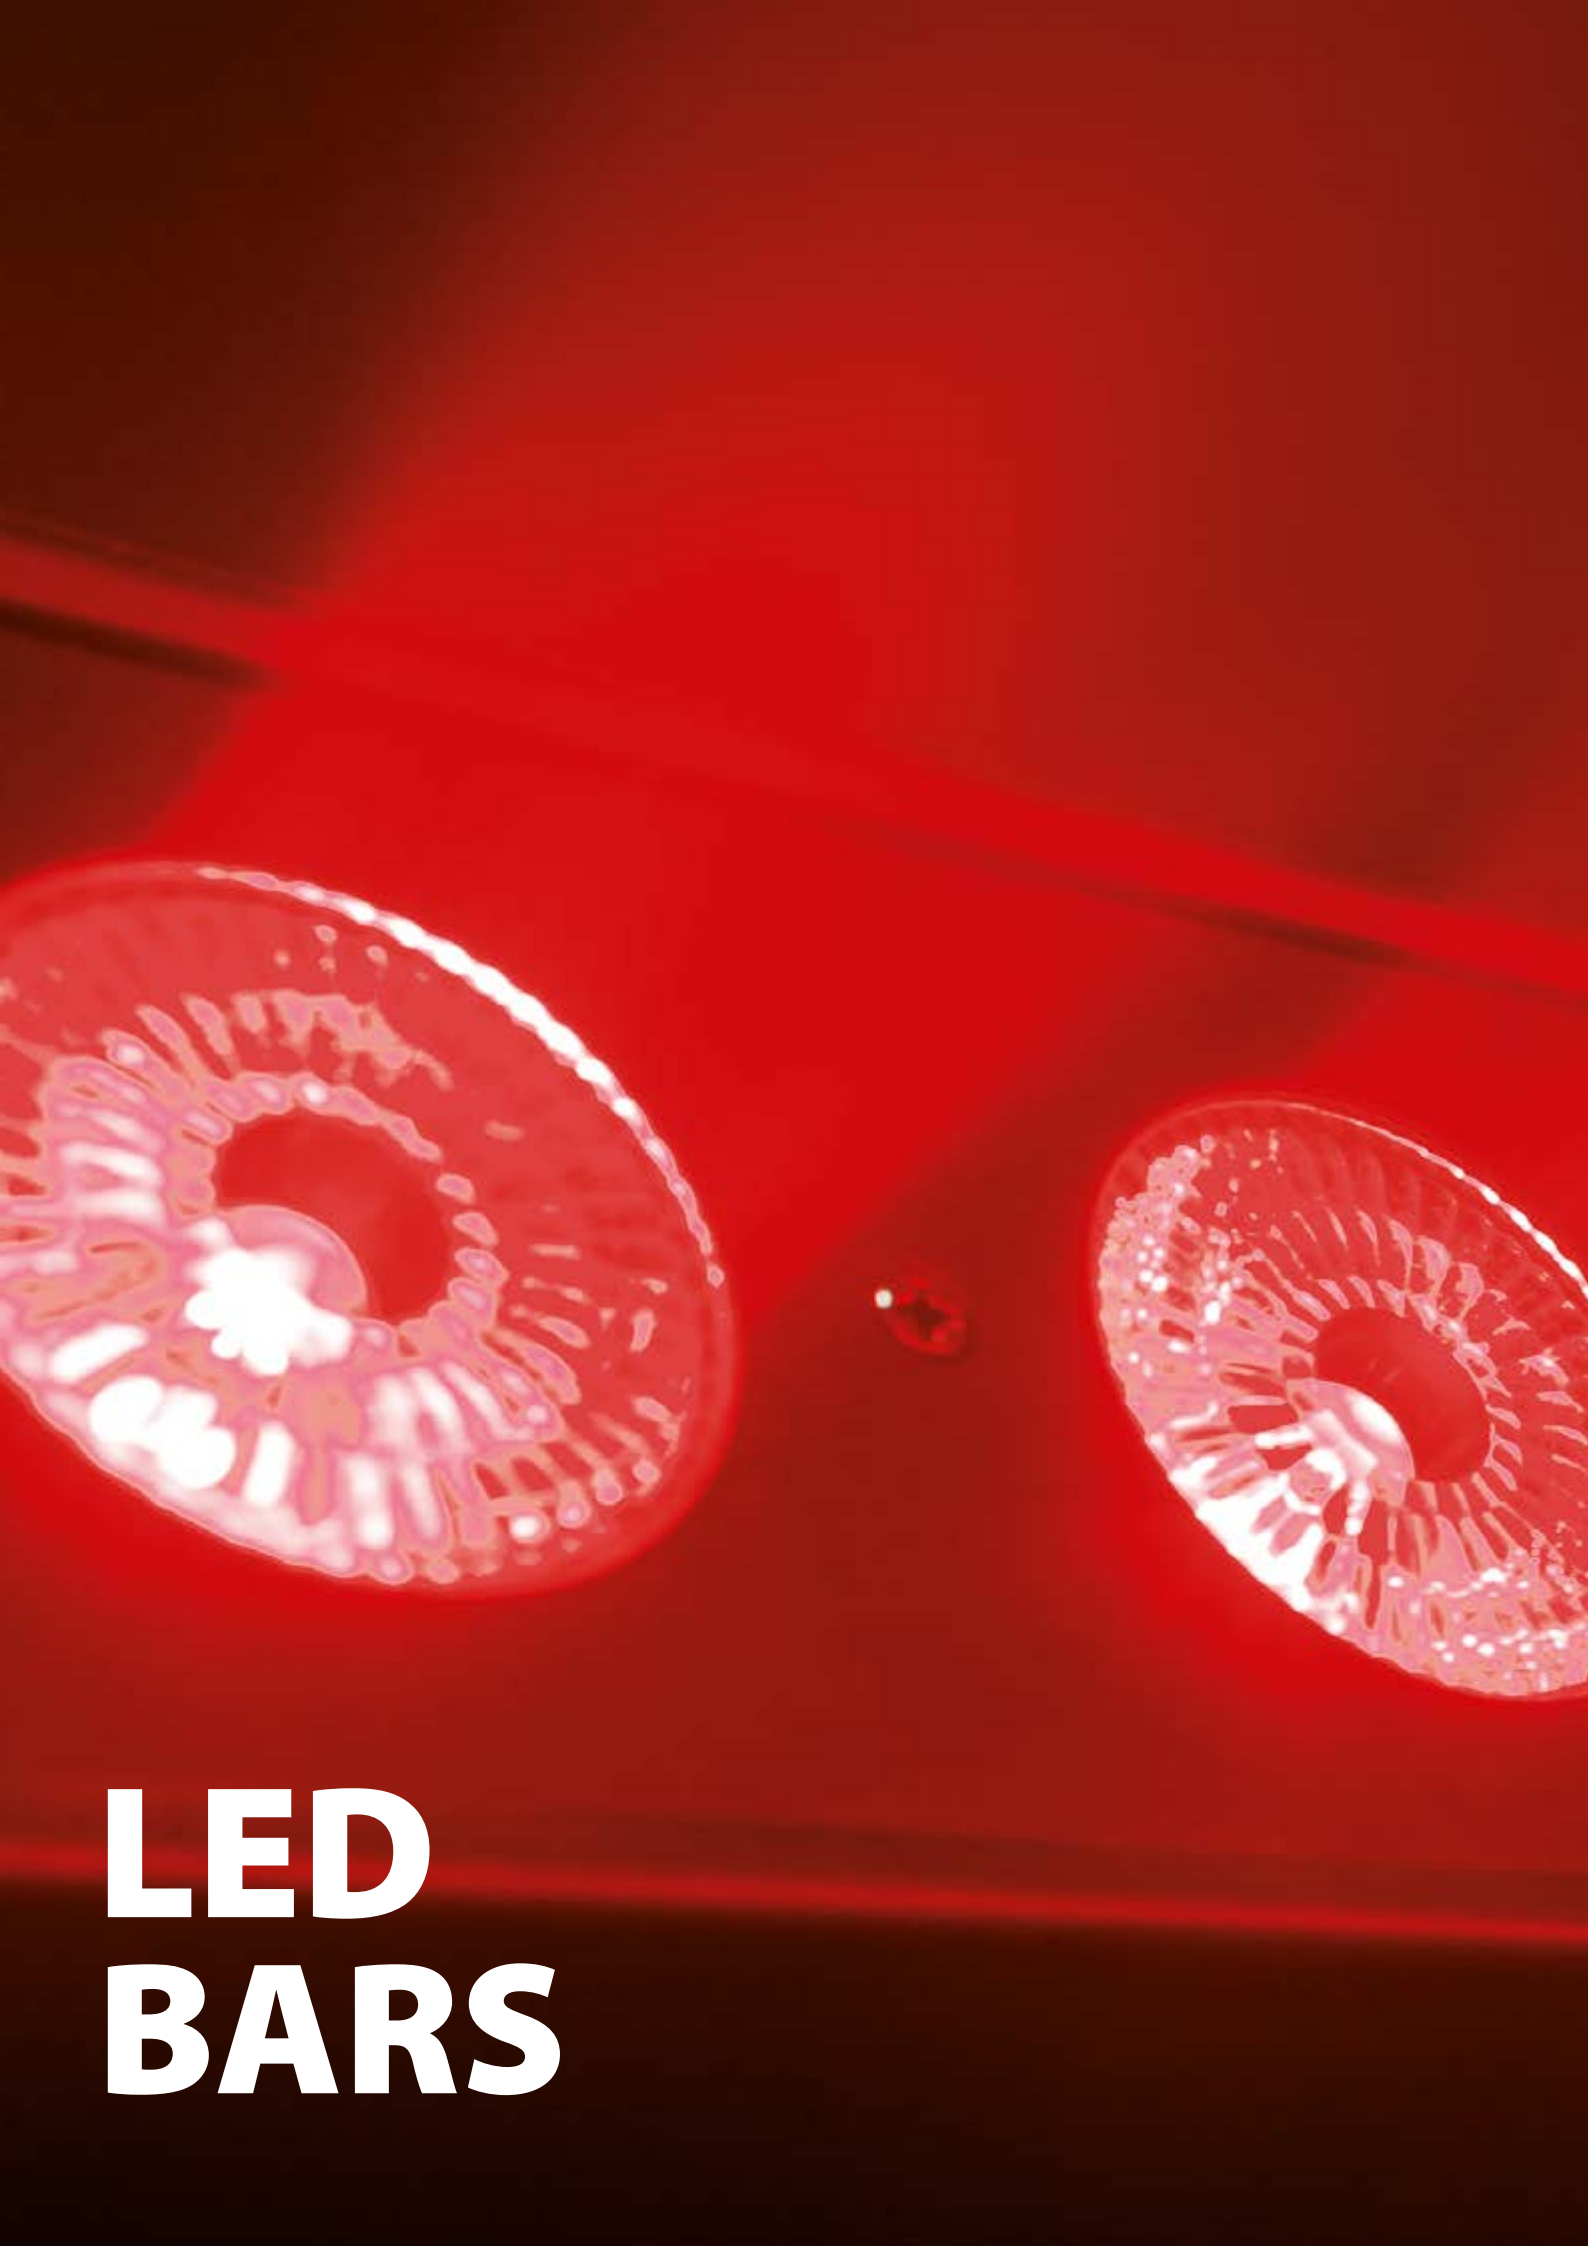

LED BARS



NEW



SG QPIX360 (led circle) - PRODUCT CODE

SG QPIXBARBOX - CONTROL BOX MAX. 16 PCS OF QPIX BAR

SG CASEQPIX360 - CASE FOR 6X QPIX 360

LIGHT SOURCE

- 144 SMD led RGB high efficiency (for each QPix 360)
- Led refresh frequency >400Hz flicker free

OPTIC SYSTEM

- Viewing angle 120° x 120°
- Flat smoked diffuser (flat white diffuser on request)
- 24 sectors control (for each QPix 360)
- Pitch 16,6 mm

COLOR SYSTEM

- RGB led source

EFFECTS

- Individual control for each RGB sectors
- Linear dimmer
- Electronic strobe
- Color macro and sectors macro can be recalled by DMX

CONTROL AND PROGRAMMING

- 6 different DMX configuration available 4/7/18/108/432/436
- Proprietary signal control between QPix 360 (cable include)
- DMX control by QPix 360 BOX (sold separately)
- Each QPix 360 BOX control 6 pcs of QPix 360 maximum
- Master/Slave mode

STRUCTURE AND CABINET


- ABS housing black color
- 4 Mounting points
- 2 steel connection ropes (included) for each QPix 360
- 1 multi ways kit connection (included) for each QPix 360
- 1 clamp mounting point for each QPix 360 Box
- 5-poles XLR IN/OUT on the QPix 360 (only for dedicated signal cable)
- 3-poles XLR IN/OUT on the QPix 360 Box for the DMX signal
- 5-poles XLR OUT on the QPix 360 Box (only for dedicated signal cable)
- IP rating 20

POWER SUPPLY

- Maximum power for the QPix 360: 28W
- Maximum power for the QPix 360 Box: 32W
- IN/OUT power connection with PowerCON on the QPix 360 Box
- 85cm signal cable 5-poles XLR (included inside each QPix 360/ QPix 360 box)

WEIGHT AND DIMENSIONS

- QPix 360 weight: 1kg
- QPix 360 Box: 2kg
- QPix 360 sizes: 320x320x30 mm
- QPix 360 Box sizes: 200x10x70 mm





NEW

SG QPIX360BOX - PRODUCT CODE**LIGHT SOURCE**

- 144 SMD led RGB high efficiency (for each QPix 360)
- Led refresh frequency >400Hz flicker free

OPTIC SYSTEM

- Viewing angle 120° x 120°
- Flat smoked diffuser (flat white diffuser on request)
- 24 sectors control (for each QPix 360)
- Pitch 16,6 mm

COLOR SYSTEM

- RGB led source

EFFECTS

- Individual control for each RGB sectors
- Linear dimmer
- Electronic strobe
- Color macro and sectors macro can be recalled by DMX

CONTROL AND PROGRAMMING

- 6 different DMX configuration available 4/7/18/108/432/436
- Proprietary signal control between QPix 360 (cable include)
- DMX control by QPix 360 BOX (sold separately)
- Each QPix 360 BOX control 6 pcs of QPix 360 maximum
- Master/Slave mode

STRUCTURE AND CABINET


- ABS housing black color
- 4 Mounting points
- 2 steel connection ropes (included) for each QPix 360
- 1 multi ways kit connection (included) for each QPix 360
- 1 clamp mounting point for each QPix 360 Box
- 5-poles XLR IN/OUT on the QPix 360 (only for dedicated signal cable)
- 3-poles XLR IN/OUT on the QPix 360 Box for the DMX signal
- 5-poles XLR OUT on the QPix 360 Box (only for dedicated signal cable)
- IP rating 20

POWER SUPPLY

- Maximum power for the QPix 360: 28W
- Maximum power for the QPix 360 Box: 32W
- IN/OUT power connection with PowerCON on the QPix 360 Box
- 85cm signal cable 5-poles XLR (included inside each QPix 360/ QPix 360 box)


WEIGHT AND DIMENSIONS

- QPix 360 weight: 1kg
- QPix 360 Box: 2kg
- QPix 360 sizes: 320x320x30 mm
- QPix 360 Box sizes: 200x10x70 mm

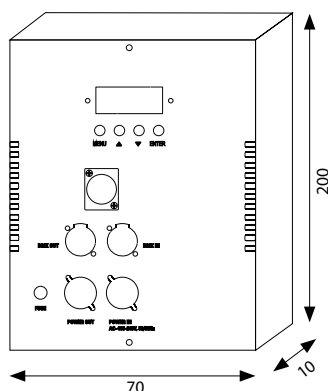



NEW

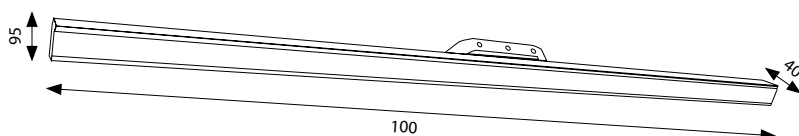**SG QPIXBAR** (led bar) - PRODUCT CODE**SG QPIXBARBOX** - CONTROL BOX MAX. 16 PCS OF QPIX BAR**SG QPIXBARCK2** - CONNECTION KIT 2 WAY 90°**SG QPIXBARCK3** - CONNECTION KIT 3 WAY T**SG QPIXBARCK4** - CONNECTION KIT 4 WAY**SG QPIXBARCKV** - CONNECTION KIT 2 WAY VARIABLE**SG QPIXBARBS** - BASE FOR 2 VERTICAL QPIX BAR**SG QPIXBARRWD** - ROUND WHITE DIFFUSER**SG CASEQPIXBAR** - CASE FOR 16X QPIX BAR**LIGHT SOURCE**

- 40 SMD5050 led RGB high efficiency (for each QPix Bar)
- Led refresh frequency >400Hz flicker free

OPTIC SYSTEM

- Viewing angle 120° x 120°
- Flat smoked diffuser (flat white diffuser included)
- Pitch 25 mm

COLOR SYSTEM

- RGB led source

EFFECTS

- Control pixel to pixel
- Linear dimmer
- Electronic strobe
- Color macro and pixel macro can be recalled by DMX

CONTROL AND PROGRAMMING

- 5 different DMX configuration available 7/16/48/82/480
- Artnet configuration available 4x480
- Proprietary control signal between QPix Bar
- DMX/Artnet control by QPix Bar BOX (sold separately)
- Each QPix Bar Box control 16 pcs of QPix Bar divided into 4 outputs
- Master/Slave mode

STRUCTURE AND CABINET

- Diecast aluminium housing black color
- Mounting points: single metal bracket for suspension
- 1 linear connection KIT (included)
- 3 different connection KIT multi ways (sold separately)
- RJ45 IN/OUT connections on the QPix Bar
- 3/5 poles XLR IN/OUT on the QPix Bar BOX
- RJ45 EtherCON data connectors IN/OUT on the QPix Bar BOX
- 4 outputs RJ45 EtherCON connections on the QPix Bar BOX
- IP rating 20

POWER SUPPLY

- QPix Bar is powered by QPix Bar BOX
- Maximum power 400W for the QPix Bar BOX (full power maximum 16 led bar)
- IN/OUT power connection with PowerCON on the QPix Bar Box

WEIGHT AND DIMENSIONS

- QPix Bar weight: 1,2kg
- QPix Bar BOX: 4kg
- QPix Bar sizes: 100x40x95 mm
- QPix Bar BOX sizes: 290x205x85 mm



NEW

SG QPIX360BARBOX - PRODUCT CODE**LIGHT SOURCE**

- 40 SMD5050 led RGB high efficiency (for each QPix Bar)
- Led refresh frequency >400Hz flicker free

OPTIC SYSTEM

- Viewing angle 120° x 120°
- Flat smoked diffuser (flat white diffuser included)
- Pitch 25 mm

COLOR SYSTEM

- RGB led source

EFFECTS

- Control pixel to pixel
- Linear dimmer
- Electronic strobe
- Color macro and pixel macro can be recalled by DMX

CONTROL AND PROGRAMMING

- 5 different DMX configuration available 7/16/48/82/480
- Artnet configuration available 4x480
- Proprietary control signal between QPix Bar
- DMX/Artnet control by QPix Bar BOX (sold separately)
- Each QPix Bar Box control 16 pcs of QPix Bar divided into 4 outputs
- Master/Slave mode

STRUCTURE AND CABINET


- Diecast aluminium housing black color
- Mounting points: single metal bracket for suspension
- 1 linear connection KIT (included)
- 3 different connection KIT multi ways (sold separately)
- RJ45 IN/OUT connections on the QPix Bar
- 3/5 poles XLR IN/OUT on the QPix Bar BOX
- RJ45 EtherCON data connectors IN/OUT on the QPix Bar BOX
- 4 outputs RJ45 EtherCON connections on the QPix Bar BOX
- IP rating 20

POWER SUPPLY

- QPix Bar is powered by QPix Bar BOX
- Maximum power 400W for the QPix Bar BOX (full power maximum 16 led bar)
- IN/OUT power connection with PowerCON on the QPix Bar Box

WEIGHT AND DIMENSIONS

- QPix Bar weight: 1,2kg
- QPix Bar BOX: 4kg
- QPix Bar sizes: 100x40x95 mm
- QPix Bar BOX sizes: 290x205x85 mm

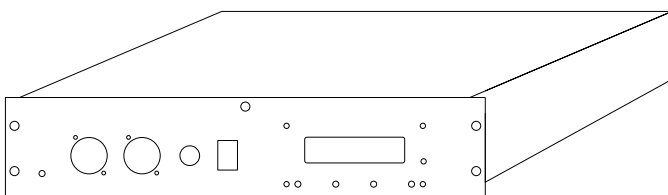



SG SLIMBAR12P - PRODUCT CODE
SG CASESLIMBAR16DL - CASE (4X SG SLIMBAR12P)

LIGHT SOURCE

- 12x15W led RGBW Full Color
- LED lifespan: >50.000h
- LED refresh frequency: >400Hz flicker free

OPTIC SYSTEM

- Beam angle: 10° x 45°
- Luminous flux: 1420 lux @5mt

COLOR SYSTEM

- LED source 4 in 1 RGBW Full Color
- Infinite chromatic possibilities and colour temperature control

EFFECTS

- Linear Dimmer 0-100%
- Electronic strobe: 1-20 flashes/s with adjustable speed
- Color macros selectable by DMX
- Single pixel control

CONTROL AND PROGRAMMING

- 7 DMX configurations available in: 3/4/5/8/10/48/52 channels
- USITT DMX 512 protocol
- Master / Slave mode
- Sound mode with adjustable mic sensitivity
- Static color mode with independent adjustment of strobe
- Automatic mode with 12 different programs selectable from the display with independent adjustment of the speed and strobe
- Color mode with 51 different pre-programmed color macros with independent adjustment of the strobe
- IR remote controller included with possibility to select colors or macros (Included)

STRUCTURE AND CABINET


- Aluminum housing, black color
- LCD graphic color display
- Mounting points: double adjustable brackets
- Single central bracket for suspension
- "Light up" positioning with angle adjustment
- DMX 3-poles XLR In/Out connectors
- IP rating: IP20
- Forced air fan cooling system with electronic control

POWER SUPPLY

- Input Voltage: AC~100-240V 50/60Hz
- Switching power supply unit
- Max power: 190W @ 230VAC
- Power In/Out connection with powerCON socket
- Power supply cable 1,5 mt included
- Max 4 pcs linkable @240V

WEIGHT AND DIMENSIONS

- Net weight: 5,1 kg
- Dimensions: 1010x140x160 mm

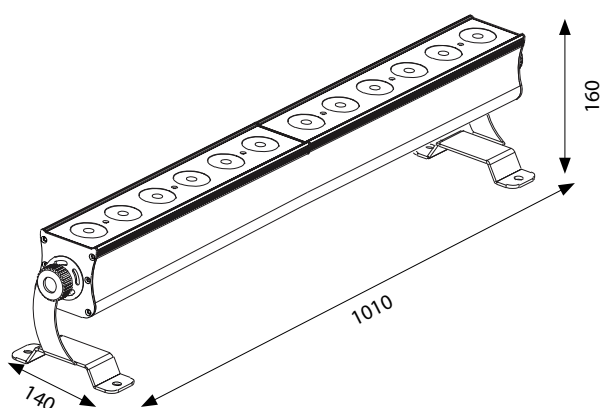



SG SLIMBAR8DL - PRODUCT CODE
SG CASESLIMBAR8DL - CASE (6X SG SLIMBAR8DL)

LIGHT SOURCE

- 8x12W led RGBWAU Full Color
- LED lifespan: >50.000h
- LED refresh frequency: >400Hz flicker free

OPTIC SYSTEM

- Beam angle: 25°
- Luminous flux: 2290 lux @3mt (25°)

COLOR SYSTEM

- LED source 6 in 1 RGBWAU Full Color
- Infinite chromatic possibilities and colour temperature control
- Color temperature control with Amber color
- "Dark Light" technology LED UV (Ultra Violet)
- 2 color macros can be recalled by DMX

EFFECTS

- Linear Dimmer 0-100%
- Electronic strobe: 1-20 flashes/s with adjustable speed

CONTROL AND PROGRAMMING

- 6 DMX configurations available: 1/6/10/12/24/28 channels
- "Double pixel" control system
- USITT DMX 512 protocol
- Master / Slave mode
- Sound mode with adjustable mic sensitivity
- Static color mode with independent adjustment of strobe
- Automatic mode with 12 different programs selectable from the display with independent adjustment of the speed and strobe
- Color mode with 69 different pre-programmed color macros with independent adjustment of the strobe
- IR remote controller included with possibility to recall colors or macros

STRUCTURE AND CABINET


- Aluminum housing, black color
- Blue LCD graphic display
- Mounting points: double adjustable brackets
- Single central bracket for suspension
- "Light up" positioning with angle adjustment
- DMX 3-poles XLR In/Out connectors
- IP rating: IP20
- Forced air fan cooling system with electronic control


POWER SUPPLY

- Input Voltage: AC~100-240V 50/60Hz
- Switching power supply unit
- Max power: 110W @ 230VAC
- Power In/Out connection with powerCON socket
- Power supply cable 1,5 mt included
- Max 6 pcs linkable @240V

WEIGHT AND DIMENSIONS

- Net weight: 3,6 kg
- Dimensions: 505x140x160 mm

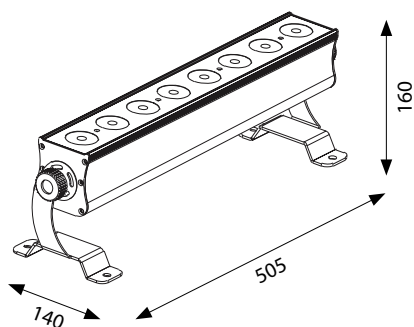

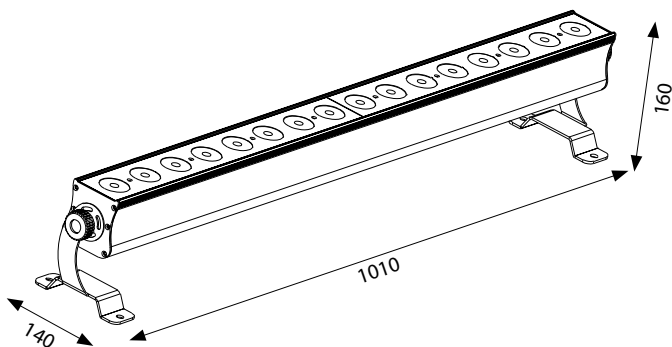

SG SLIMBAR16DL - PRODUCT CODE
SG CASESLIMBAR16DL - CASE (4X SG SLIMBAR16DL)

LIGHT SOURCE

- 16x12W led RGBWAU Full Color
- LED lifespan: >50.000h
- LED refresh frequency: >400Hz flicker free

OPTIC SYSTEM

- Beam angle: 25°
- Luminous flux: 1390 lux @5mt (25°)

COLOR SYSTEM

- LED source 6 in 1 RGBWAU Full Color
- Infinite chromatic possibilities and colour temperature control
- Color temperature control with Amber color
- "Dark Light" technology LED UV (Ultra Violet)
- 2 color macros can be recalled by DMX

EFFECTS

- Linear Dimmer 0-100%
- Electronic strobe: 1-20 flashes/s with adjustable speed

CONTROL AND PROGRAMMING

- 7 DMX configurations available: 1/6/10/12/28/48/52 channels
- "Double pixel" control system
- USITT DMX 512 protocol
- Master / Slave mode
- Sound mode with adjustable mic sensitivity
- Static color mode with independent adjustment of strobe
- Automatic mode with 12 different programs selectable from the display with independent adjustment of the speed and strobe
- Color mode with 69 different pre-programmed color macros with independent adjustment of the strobe
- IR remote controller included with possibility to recall colors or macros

STRUCTURE AND CABINET

- Aluminum housing, black color
- Blue LCD graphic display
- Mounting points: double adjustable brackets
- Single central bracket for suspension
- "Light up" positioning with angle adjustment
- DMX 3-poles XLR In/Out connectors
- IP rating: IP20
- Forced air fan cooling system with electronic control


POWER SUPPLY

- Input Voltage: AC~100-240V 50/60Hz
- Switching power supply unit
- Max power: 210W @ 230VAC
- Power In/Out connection with powerCON socket
- Power supply cable 1,5 mt included
- Max 4 pcs linkable @240V

WEIGHT AND DIMENSIONS

- Net weight: 5,1 kg
- Dimensions: 1010x140x160 mm

SLIMBAR 8 BATTERY

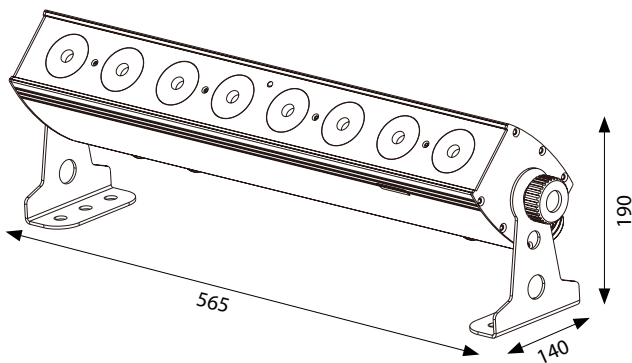
SG SLIMBAR8BAT - PRODUCT CODE
 - CASE (5X SG SLIMBAR8BAT)
LIGHT SOURCE

- 8x10W led RGBW Full Color
- LED lifespan: >50.000h
- LED refresh frequency: >400Hz flicker free

OPTIC SYSTEM

- Beam angle: 10°x40°

COLOR SYSTEM

- LED source 4 in 1 RGBW Full Color
- Infinite chromatic possibilities

EFFECTS

- Linear Dimmer 0-100%
- Electronic strobe: 1-20 flashes/s with adjustable speed

CONTROL AND PROGRAMMING

- 3 DMX configurations available: 1/4/7 channels
- USITT DMX 512 protocol
- Built-in DMX wireless (DMX wireless transmitter SG AIRBOX, sold separately)
- Master / Slave mode
- Sound mode with 3 different programs and adjustable mic sensitivity
- Static color mode with strobe adjustment
- Automatic mode with 6 different programs selectable from the display with independent adjustment of the speed
- Color mode with 51 different pre-programmed color macros
- IR remote controller included

STRUCTURE AND CABINET


- Metal housing, black color
- Blue LCD graphic display
- Mounting points: double adjustable brackets
- "Light up" positioning with angle adjustment
- DMX 3-poles XLR In/Out connectors
- IP rating: IP20
- Convection cooling system without fans

POWER SUPPLY

- Input Voltage: AC~100-240V 50/60Hz for normal working and battery recharge
- Switching power supply unit
- Internal rechargeable battery: 12,6VDC
- Capacity: 10 Ah
- Runtime battery: ~ 5 h (full ON)
- Charging cycle: ~ 8 h (Projector off)
- Max Power: 80W @ 230VAC
- Power In/Out connection with powerCON socket
- Power supply cable 1,5 mt included

WEIGHT AND DIMENSIONS

- Net weight: 3,6 kg
- Dimensions: 565x140x190

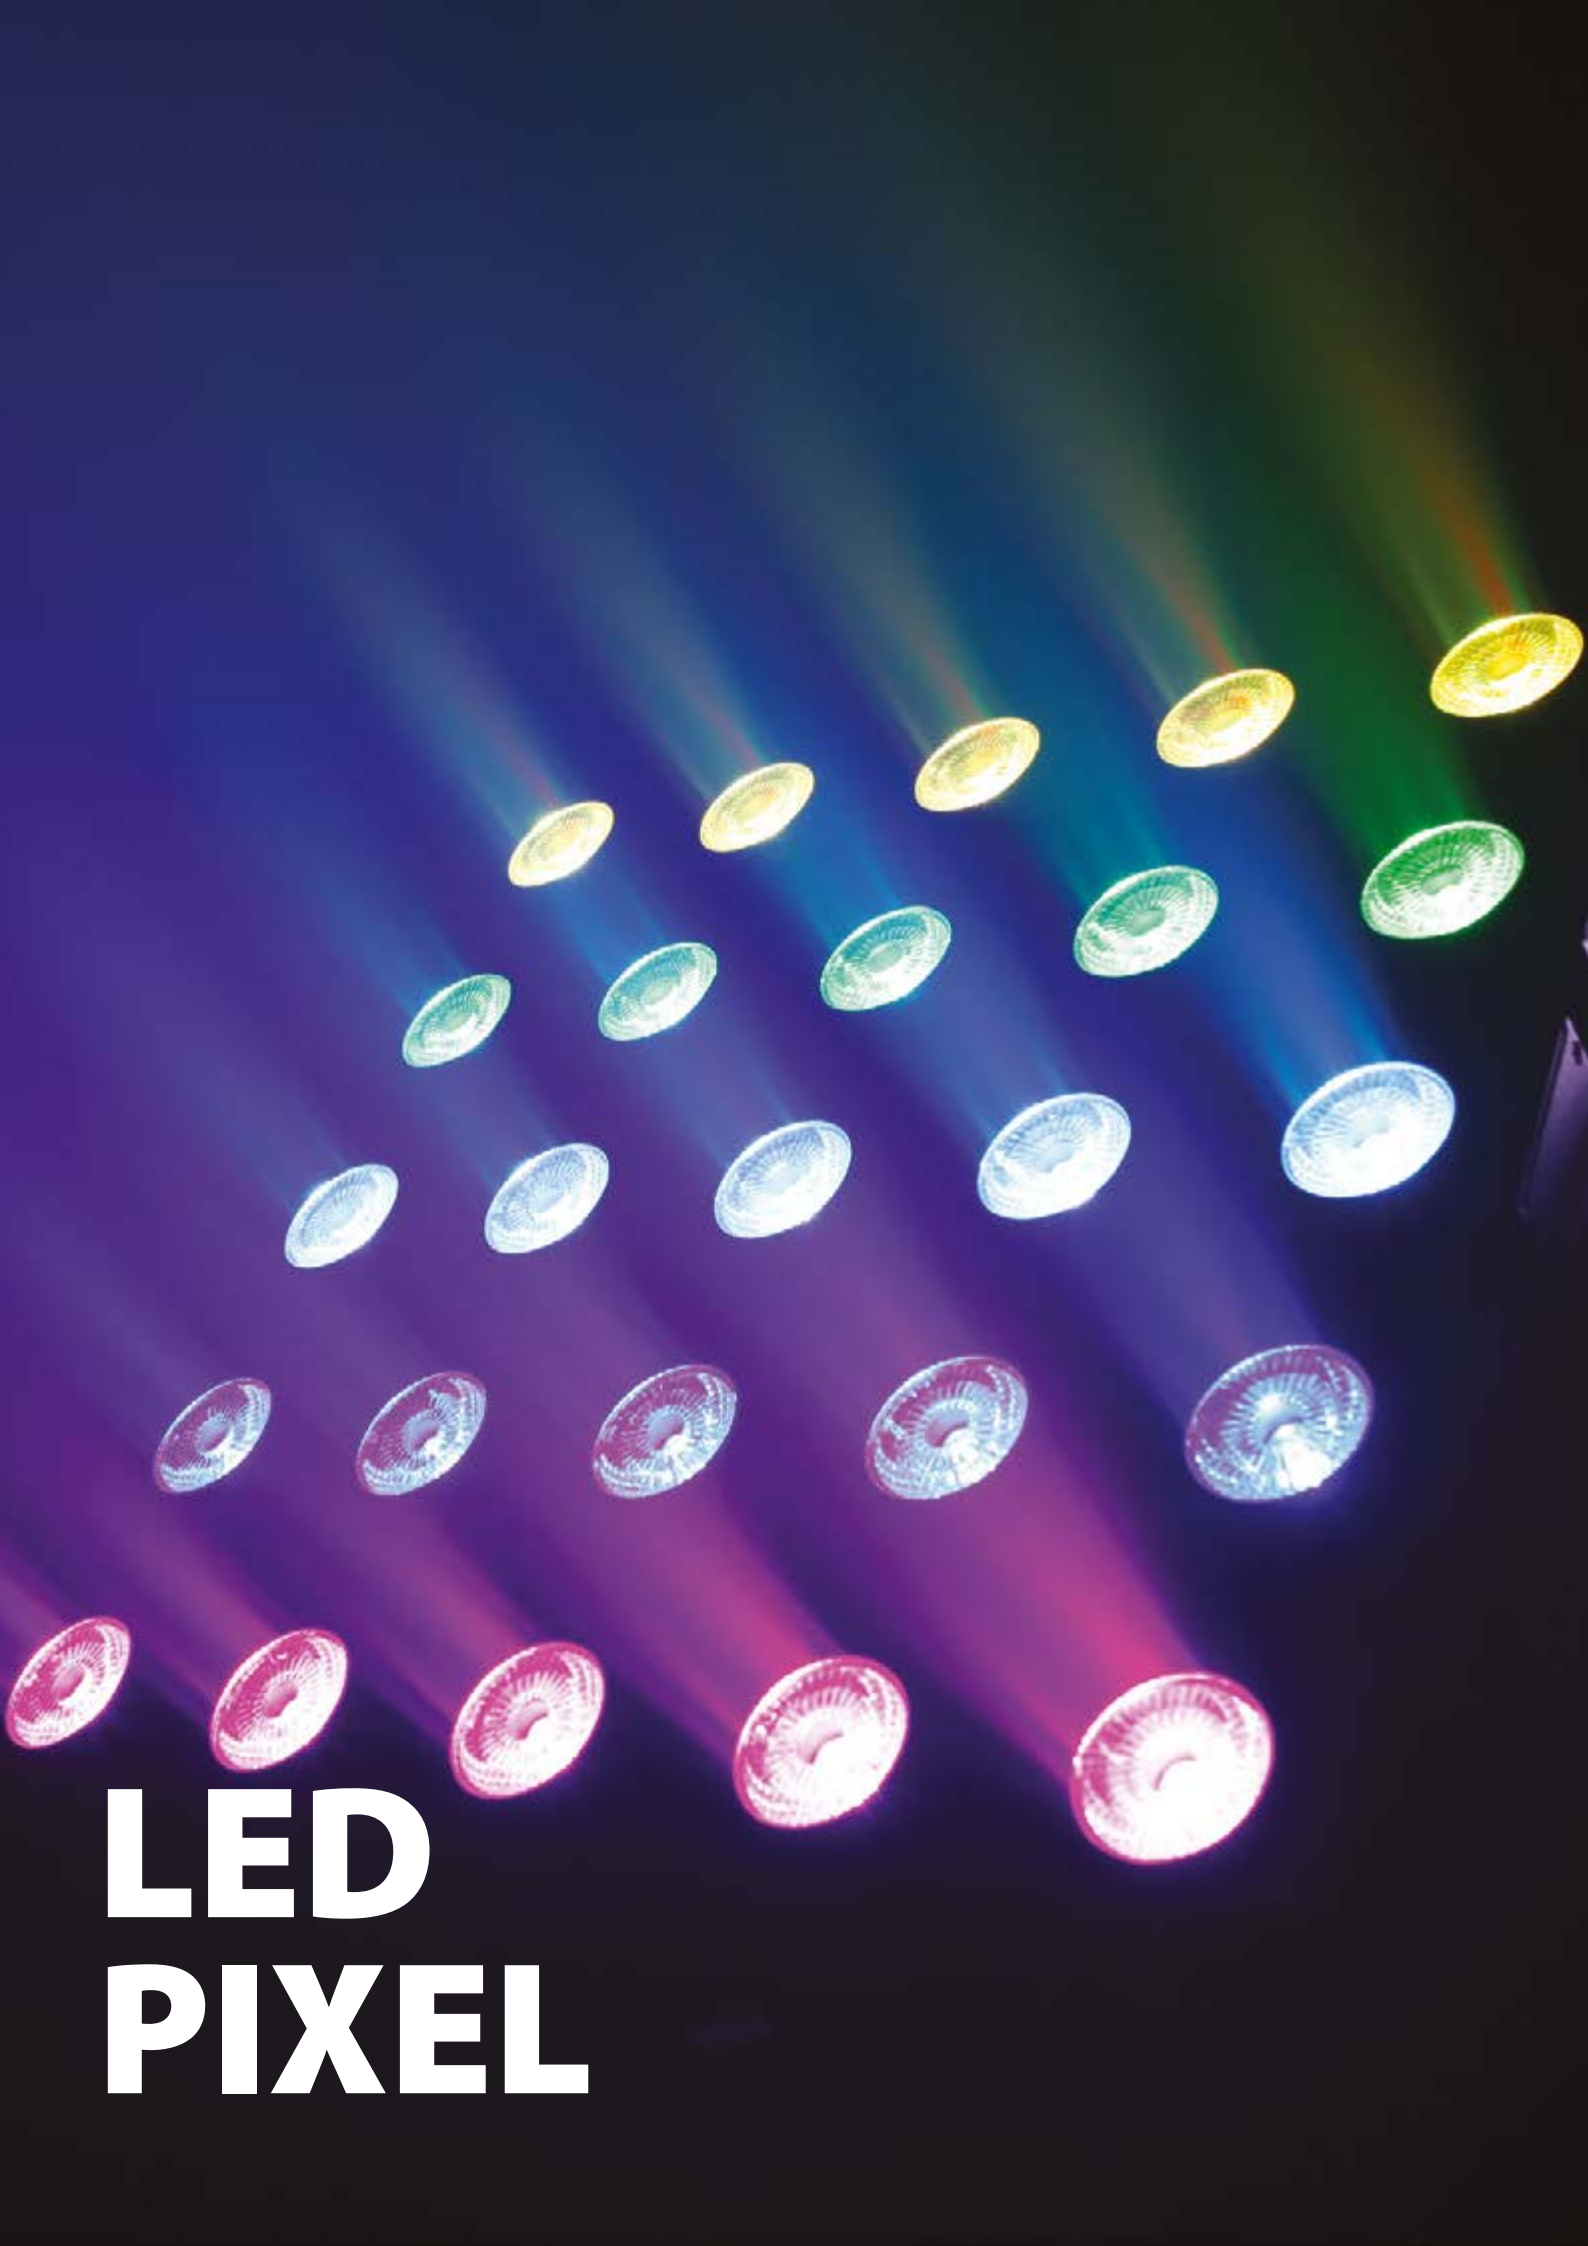

**LED
PIXEL**

**SG PIXI5 - PRODUCT CODE****SG CASEPIXI5 - CASE (6x SG PIXI5)****LIGHT SOURCE**

- 25x10W led RGBW Full Color
- LED lifespan: >50.000h
- LED refresh frequency: >400Hz flicker free

OPTIC SYSTEM

- Beam angle: 15°
- Luminous flux: 2130 lux @5mt (15°)
- DC (dark cover) optical insulation system

COLOR SYSTEM

- LED source 4 in 1 RGBW Full Color
- Infinite chromatic possibilities
- Color macros can be recalled by DMX

EFFECTS

- Linear Dimmer 0-100%
- Electronic strobe: 1-20 flashes/s with adjustable speed
- Color macros and pixel can be recalled by DMX

CONTROL AND PROGRAMMING

- 5 DMX configurations available: 4/6/8/10/100 channels
- Single pixel control
- 3 selectable dimmer curve
- USITT DMX 512 protocol
- Master / Slave mode
- Sound mode with adjustable mic sensitivity
- Static color mode with independent adjustment of strobe
- Automatic mode with 19 different programs selectable from the display with independent adjustment of the speed

STRUCTURE AND CABINET



- Aluminum housing, black color
- LCD graphic color display
- Mounting points: double central adjustable bracket
- Specific hardware for connection between panels
- DMX 3-poles XLR In/Out connectors
- IP rating: IP20
- Fan cooling system without fans

POWER SUPPLY

- Input Voltage: AC~100-240V 50/60Hz
- Switching power supply unit
- Max power: 280W @ 230VAC
- Power In/Out connection with powerCON socket
- Power supply cable 1,5 mt included
- Max 6 pcs linkable @240V

WEIGHT AND DIMENSIONS

- Net weight: 6,8 kg
- Dimensions: 399x113x399 mm

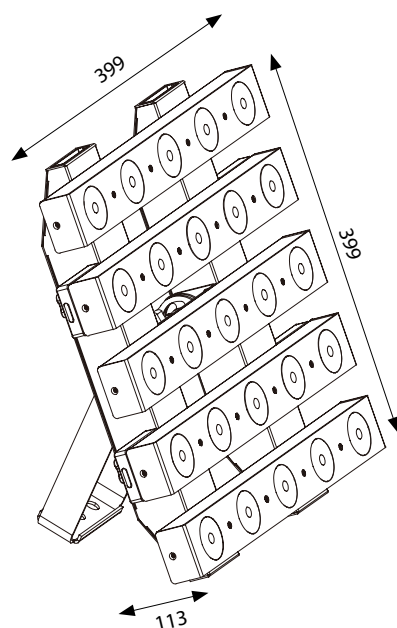

**SG PIX15W - PRODUCT CODE****SG CASEPIX15 - CASE (6x SGPIX15W)****LIGHT SOURCE**

- 25x3W CREE XPE led Warm White 2800K
- LED lifespan: >50.000h
- LED refresh frequency: >400Hz flicker free

OPTIC SYSTEM

- Beam angle: 5°
- Luminous flux: 7750 lux @5mt (15°)
- DC (dark cover) optical insulation system

COLOR SYSTEM

- LED source CREE Warm White 2800K

EFFECTS

- Linear Dimmer 0-100%
- Electronic strobe: 1-20 flashes/s with adjustable speed
- Color macros and pixel can be recalled by DMX

CONTROL AND PROGRAMMING

- 4 DMX configurations available: 1/2/6/25 channels
- 3 selectable dimmer curves
- Single pixel control
- USITT DMX 512 protocol
- Master / Slave mode
- Sound mode with adjustable mic sensitivity
- Static color mode with independent adjustment of strobe
- Automatic mode with 120 different programs selectable from the display with independent adjustment of the speed

STRUCTURE AND CABINET


- Aluminum housing, black color
- LCD graphic color display
- Mounting points: double central adjustable bracket
- Specific hardware for connection between panels
- DMX 3-poles XLR In/Out connectors
- IP rating: IP20
- Fan cooling system without fans

POWER SUPPLY

- Input Voltage: AC~100-240V 50/60Hz
- Switching power supply unit
- Max power: 80W @ 230VAC
- Power In/Out connection with powerCON socket
- Power supply cable 1,5 mt included
- Max 8 pcs linkable @240V

WEIGHT AND DIMENSIONS

- Net weight: 6,8 kg
- Dimensions: 399x113x399 mm

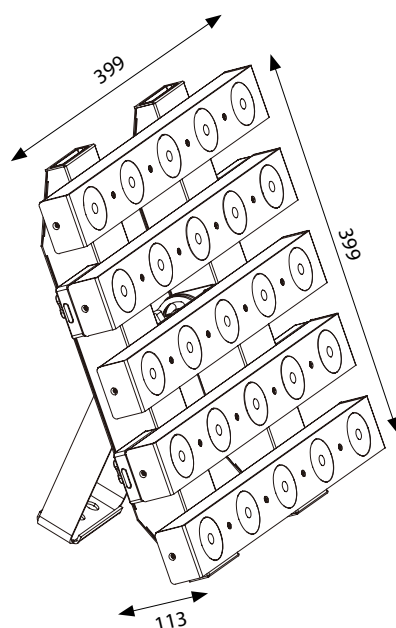

**SG PIXI5WL - PRODUCT CODE****SG CASEPIXI5WL - CASE (8X SG PIXI5WL)****LIGHT SOURCE**

- 12x3W CREE XPE led Warm White 2800K
- LED lifespan: >50.000h
- LED refresh frequency: >400Hz flicker free

OPTIC SYSTEM

- Beam angle: 5°
- Luminous flux: 3850lux @ 4m
- DC (dark cover) optical insulation system

COLOR SYSTEM

- LED source CREE Warm White 2800K

EFFECTS

- Linear Dimmer 0-100%
- Electronic strobe: 1-20 flashes/s with adjustable speed
- Color macros and pixel can be recalled by DMX

CONTROL AND PROGRAMMING

- 4 DMX configurations available: 2/3/6/12 channels
- 3 selectable dimmer curves
- Single pixel control
- USITT DMX 512 protocol
- Master / Slave mode
- Sound mode with adjustable mic sensitivity
- Static color mode with independent adjustment of strobe
- Automatic mode with independent adjustment of the speed

STRUCTURE AND CABINET



- Aluminum housing, black color
- LCD graphic color display
- Mounting points: central bracket
- Specific hardware for connection between panels
- DMX 3-poles XLR In/Out connectors
- IP rating: IP20
- Fan cooling system without fans


POWER SUPPLY

- Input Voltage: AC~100-240V 50/60Hz
- Switching power supply unit
- Max power: 40W @ 230VAC
- Power In/Out connection with powerCON socket
- Power supply cable 1,5 mt included
- Max 20 pcs linkable @240V

WEIGHT AND DIMENSIONS

- Net weight: 2,5 kg
- Dimensions: 1000x55x142 mm

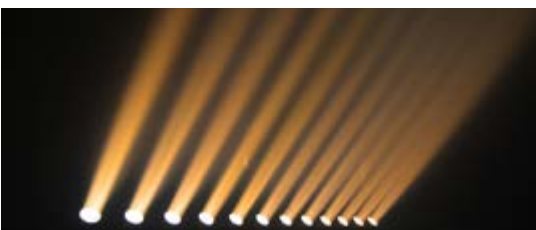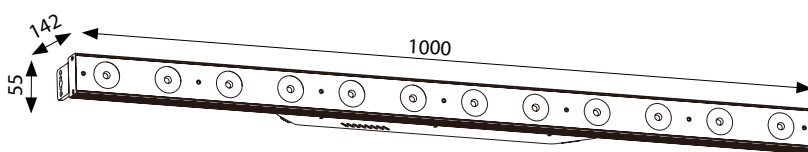

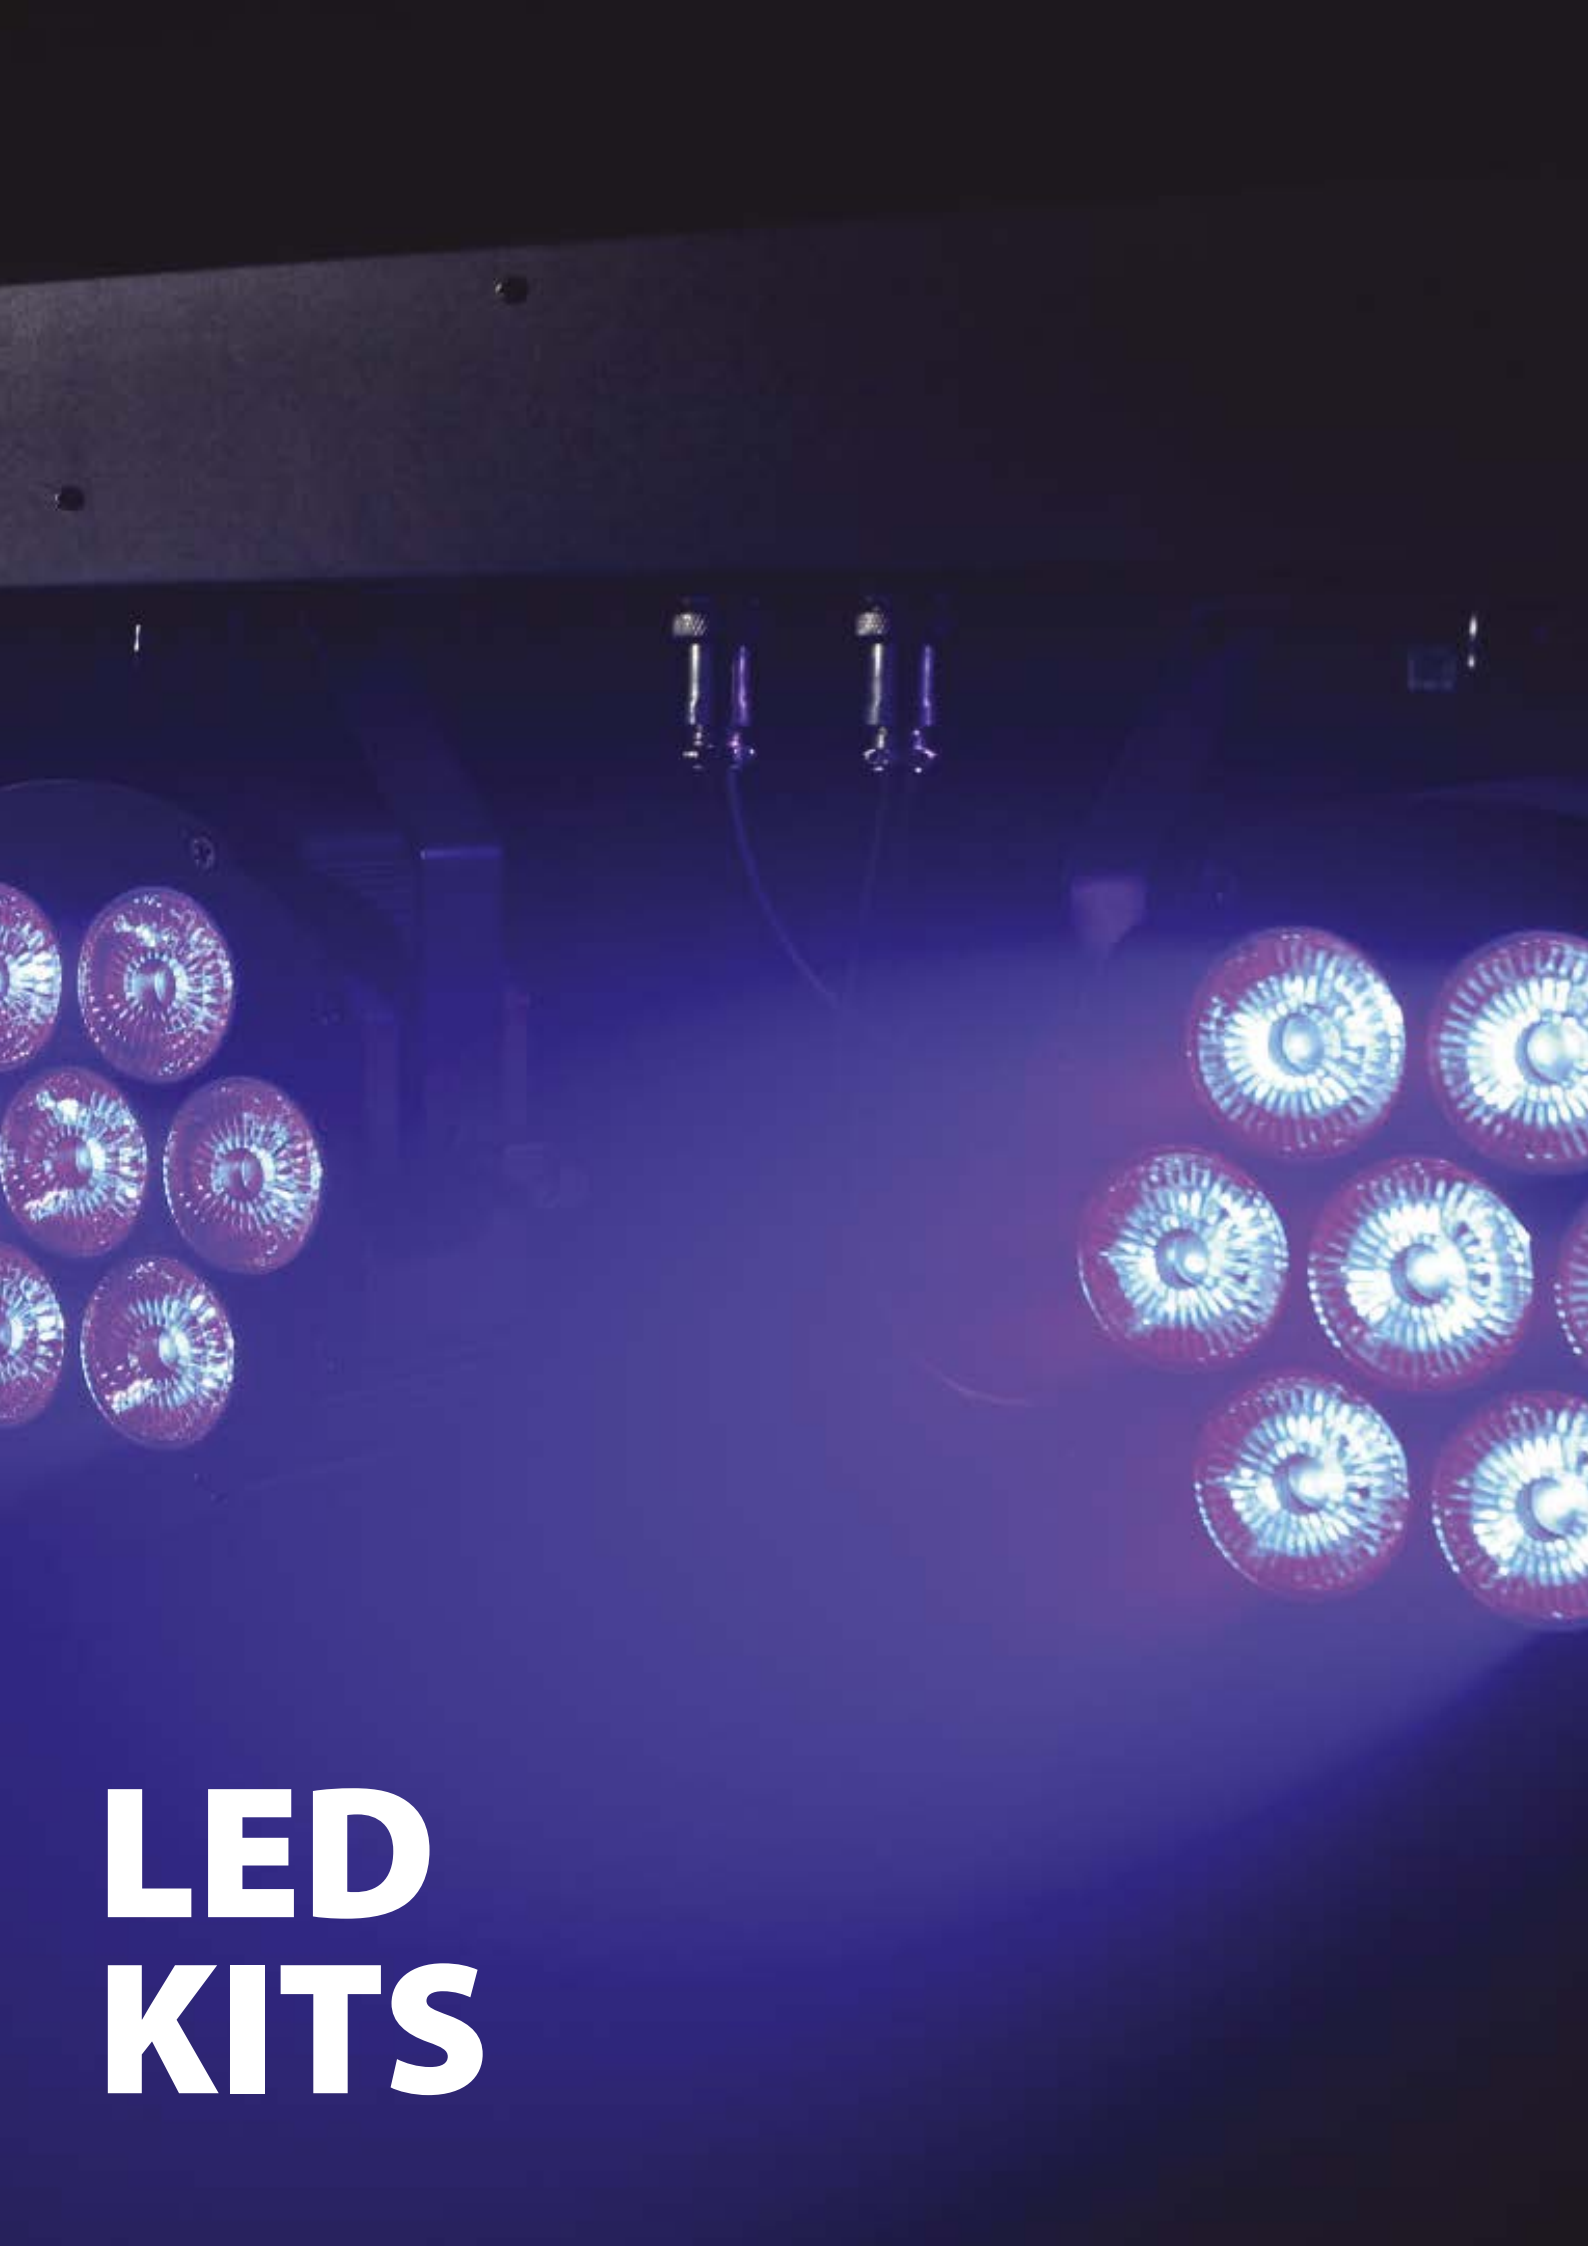

LED KITS

**SG LEDKITHP3C - PRODUCT CODE****LIGHT SOURCE**

- Kit 4 projectors 3x6W led RGBW Full Color
- LED lifespan: > 50.000h

OPTIC SYSTEM

- Beam Angle: 25°

COLOR SYSTEM

- Led Source 4 in 1 RGBW Full Color
- Infinite chromatic possibilities

EFFECTS

- Linear dimmer 0-100%
- Adjustable strobe effect
- Auto mode can be recalled by DMX

CONTROL AND PROGRAMMING

- 5 DMX configurations available: 4/6/10/16/18 channels
- Each projector can be controlled independently via DMX
- USITT DMX 512 protocol
- Master/Slave mode
- Sound mode with adjustable microphone sensitivity
- Automatic mode with 6 different programs selectable from the display or footswitch, with adjustment of the speed
- Color mode with 9 different pre-programmed color macros
- Footswitch control included: Blackout, Sound, Auto, Freeze

STRUCTURE AND CABINET


- Metal housing, black color
- Red LED display
- Mounting points: double adjustable brackets
- "Light up" positioning
- DMX 3-poles XLR In/Out connectors
- IP rating: IP20
- Stand max. H 2200
- Soft bag for bar for transport included

POWER SUPPLY

- Input Voltage: AC~100-240V, 50/60 Hz
- Switching power supply unit
- Max power: 80W @ 230VAC
- Power supply cable included

WEIGHT AND DIMENSIONS

- Bar net weight: 5,8 kg
- Stand net weight: 2,8 kg
- Bar Dimensions: 950x90x230 mm

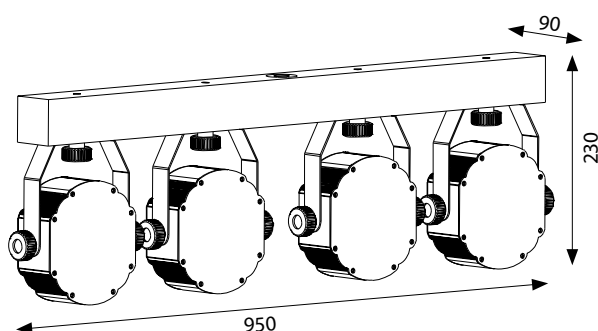

**SG LEDKITHP7BAT - PRODUCT CODE****LIGHT SOURCE**

- Kit 4 projectors 7x10W led RGBW Full Color
- LED lifespan: > 50.000h

OPTIC SYSTEM

- Beam Angle: 25°

COLOR SYSTEM

- Led Source 4 in 1 RGBW Full Color
- Infinite chromatic possibilities

EFFECTS

- Linear dimmer 0-100%
- Adjustable strobe effect
- Auto mode can be recalled by DMX

CONTROL AND PROGRAMMING

- 7 DMX configurations available: 4/5/6/9/10/16/20 channels
- Each projector can be controlled independently via DMX
- USITT DMX 512 protocol
- Master/Slave mode
- Sound mode with adjustable microphone sensitivity
- Automatic mode with 6 different programs selectable from the display or footswitch, with adjustment of the speed
- Color mode with 9 different pre-programmed color macros
- Wireless battery footswitch: Blackout, Sound, Auto, Freeze (included)

STRUCTURE AND CABINET


- Metal housing, black color
- Red LED display
- Mounting points: double adjustable brackets
- "Light up" positioning
- DMX 3-poles XLR In/Out connectors
- IP rating: IP20
- Stand max. H 2800
- Soft bag for bar for transport included

POWER SUPPLY

- Input Voltage: AC~100-240V, 50/60 Hz
- Switching power supply unit
- Max power: 300W @ 230VAC
- Internal Li-ion rechargeable battery
- Runtime battery: ~ 6 hrs (full ON)
- Charging cycle: ~ 5 hrs (led blackout when charging)
- Power supply cable included

WEIGHT AND DIMENSIONS

- Bar net weight: 9,6 kg
- Stand net weight: 4,5 kg
- Bar Dimensions: 1180x90x270 mm

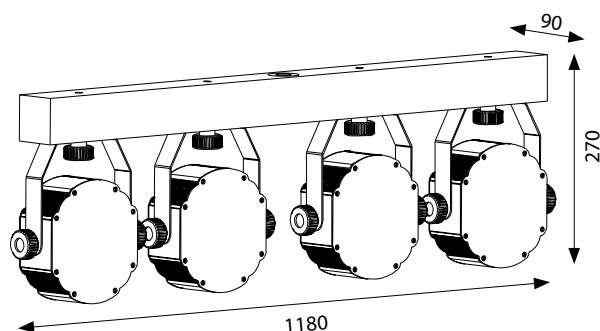

**SG LEDKITHP7 - PRODUCT CODE****LIGHT SOURCE**

- Kit 4 projectors 7x10W led RGBW Full Color
- LED lifespan: >50.000h
- LED refresh frequency: >400Hz flicker free

OPTIC SYSTEM

- Beam angle: 25°

COLOR SYSTEM

- LED source 4 in 1 RGBW Full Color
- Infinite chromatic possibilities and colour temperature control

EFFECTS

- Linear Dimmer 0-100%
- Electronic strobe: 1-20 flashes/s with adjustable speed
- 1 Auto mode can be recalled by DMX

CONTROL AND PROGRAMMING

- 5 DMX configurations available: 4/6/10/16/18 channels
- Each projector can be controlled independently
- USITT DMX 512 protocol
- Master / Slave mode
- Sound mode with adjustable mic sensitivity
- Automatic mode with 6 different programs selectable from the display or footswitch with independent adjustment of the speed
- Color mode with 9 different pre-programmed color macros + 1 adjustable macro
- Footswitch control included: Blackout, Sound, Auto, Freeze

STRUCTURE AND CABINET


- Metal housing, black color
- Red LED display
- Mounting points: double adjustable brackets
- "Light up" positioning
- DMX 3-poles XLR In/Out connectors
- IP rating: IP20
- Stand max. H 2800 mm with bag for transport included
- Semi rigid bag for bar transport included

POWER SUPPLY

- Input Voltage: AC~100-240V 50/60Hz
- Switching power supply unit
- Max power: 300W @ 230VAC
- Power In/Out connection with VDE socket
- Power supply cable 1,5 mt included
- Max 4 pcs linkable @240V

WEIGHT AND DIMENSIONS

- Bar Net weight: 8,5 kg
- Stand Net weight: 4,5 kg
- Bar Dimensions: 1180x90x270 mm

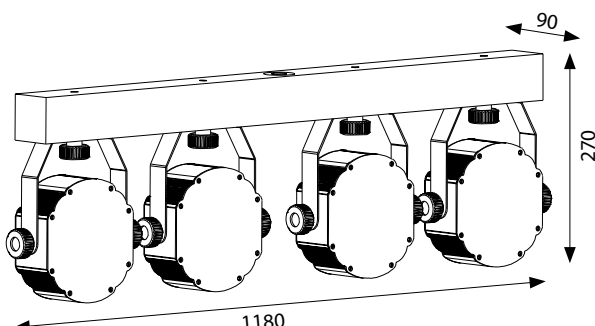



CONTROLLERS



SG FASTER192N - PRODUCT CODE

TECHNICAL DATA


- DMX controller
- Max 12 projectors, 16 channel each
- Total 192 DMX channels
- 8 sliders for control (page A/B)
- 8 programmable scenes in 30 banks
- 6 chases
- Auto mode
- Sound mode (internal microphone)


POWER SUPPLY

- Input Voltage: DC 12V, 300 mA min
- External adapter included: AC~100-240V, 50/60Hz

WEIGHT AND DIMENSIONS

- Net weight: 2,5 kg
- Dimensions: 482x132x80 mm

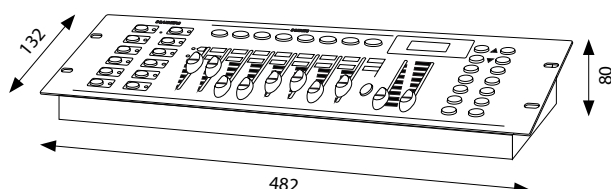

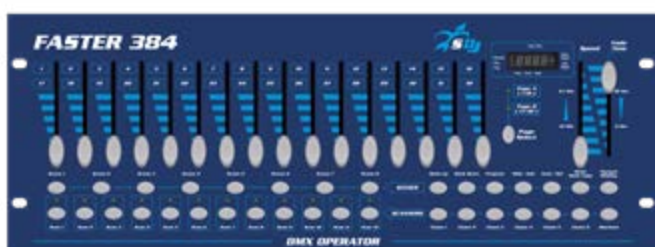

SG FASTER384 - PRODUCT CODE

TECHNICAL DATA


- DMX controller
- Max 12 projectors, 32 channels each
- Total 384 DMX channels
- 8 sliders for control (page A/B)
- 8 programmable scenes in 30 banks
- 6 chases
- Auto mode
- Sound mode (internal microphone)


POWER SUPPLY

- Input Voltage: DC 12V, 300 mA min
- External adapter included: AC~100-240V, 50/60Hz

WEIGHT AND DIMENSIONS

- Net weight: 2,5 kg
- Dimensions: 482x132x80 mm

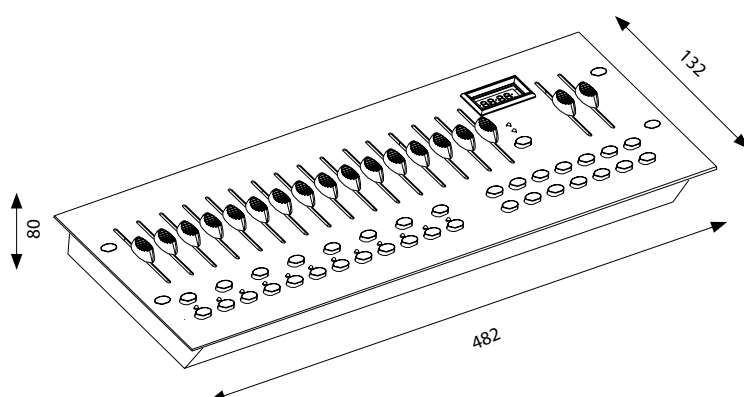

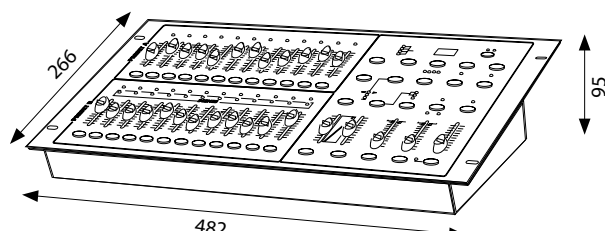

SG FASTER1224 - PRODUCT CODE

TECHNICAL DATA

- Controller for traditional projectors
- 24 DMX channels in total
- 24 control sliders
- 4 pages for 12 programs (up to 4.600 programmable steps)
- Fader setting and high speed execution for every single scene
- Possibility of edit a scene live or deferred
- Music mode (internal microphone)
- Compatible MIDI In/Out
- DMX polarity selector
- Sound-activated: Input audio



POWER SUPPLY

- Input Voltage: DC 12V, 500mA min
- External adapter included AC~100-240V, 50/60Hz

WEIGHT AND DIMENSION

- Net weight: 4,4 kg
- Dimensions: 482x266x95 mm



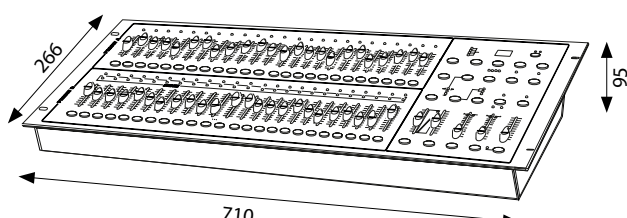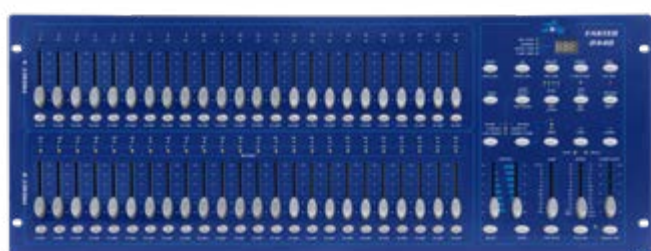

SG FASTER2448 - PRODUCT CODE

TECHNICAL DATA

- Controller for traditional projectors
- 48 DMX channels in total
- 48 control sliders
- 4 pages for 12 programs (up to 4.600 programmable steps)
- Fader setting and high speed execution for every single scene
- Possibility of edit a scene live or deferred
- Music mode (internal microphone)
- Compatible MIDI In/Out
- DMX polarity selector
- Sound-activated: Input audio

POWER SUPPLY

- Input Voltage: DC 12V, 500mA min
- External adapter included AC~100-240V, 50/60Hz



WEIGHT AND DIMENSION

- Net weight: 4,4 kg
- Dimensions: 482x266x95 mm



CONTROLLERS

FASTER 4

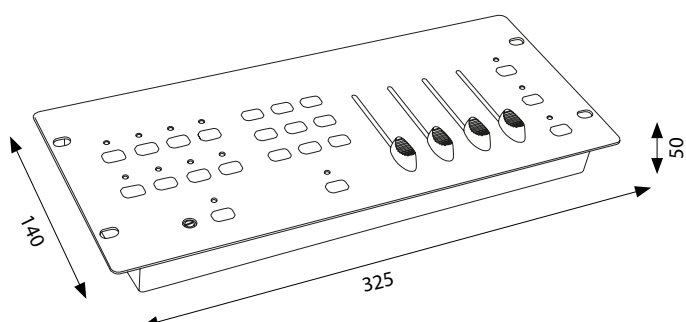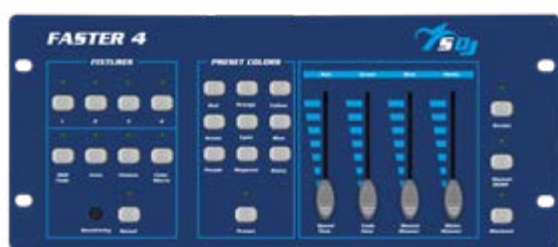

SG FASTER4 - PRODUCT CODE

TECHNICAL DATA

- DMX controller
- Max 4 projectors, 4 channel each
- Total 16 DMX channels
- 4 buttons for fixtures selection
- 4 faders for fixtures and effects control
- 4 buttons for Chases and Macro control
- RGB fade effects
- Automatic effects
- Color Macro effects
- 9 Chases color effects
- Strobe effect control
- Sound mode (internal microphone with adjustable sensitivity)


POWER SUPPLY

- Input Voltage: DC 9-12V, 500 mA min
- External adapter included: AC~100-240V, 50/60Hz

WEIGHT AND DIMENSIONS

- Net weight: 1,4 kg
- Dimensions: 325x140x50 mm



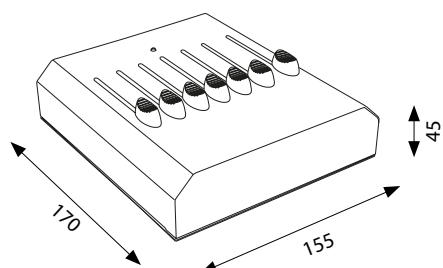

SG FASTER6 - PRODUCT CODE

TECHNICAL DATA

- DMX controller
- Total 6 DMX channels from CH1 to CH6
- 6 faders for fixtures control
- 9V battery NOT RECHARGEABLE (not included)

POWER SUPPLY

- Input Voltage: DC 9-12V, 500 mA min
- External adapter included: AC~100-240V, 50/60Hz

WEIGHT AND DIMENSIONS

- Net weight: 0,7 kg
- Dimensions: 155x170x45 mm





SG FASTERSP8 - PRODUCT CODE

TECHNICAL DATA


- 1 input - 8 output DMX512
- Opto-insulated Input and Outputs signals
- 1 DMX Input XLR 3-poles
- 1 DMX Input XLR 5-poles
- 8 DMX Outputs XLR 3-poles
- 1 DMX Thru XLR 3-poles for connection to another distributor
- 1 DMX Thru XLR 5-poles for connection to another distributor
- 1 Standard rack 19" unit

POWER SUPPLY

- AC~100-240V - 50/60Hz
- Power In connection with powerCON socket

WEIGHT AND DIMENSIONS

- Net weight: 2,0 kg
- Dimensions: 480x150x50 mm

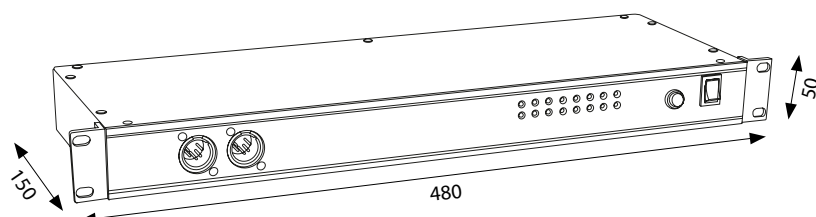



AMBIENT EFFECTS



SG HYH900 - PRODUCT CODE

EFFECTS

- Hazer/smoke effect

CONTROL AND PROGRAMMING

- 1 DMX channels configuration: 2 channels
- Fan's speed adjustable via software and via DMX
- USITT DMX 512 protocol
- Heating time: 5 mins
- Continue output
- Manual mode adjustable via display

STRUCTURE AND CABINET


- Metal housing, black color
- LCD blue graphic display
- Comfortable handle for transportation
- High performance pump for optimal emission
- High speed axial fan
- External tank: 2 litres
- DMX 3/5-poles XLR In/Out connectors
- IP rating: IP20
- For best applications and correct function we recommend using Sagitter fluids

POWER SUPPLY

- Input Voltage: AC~230V 50Hz
- Max power: 900W @ 230VAC
- Power IN connection with VDE sockets
- Power supply cable 1,5 mt included

WEIGHT AND DIMENSIONS

- Net weight: 10,4 kg
- Dimensions: 425x480x330 mm

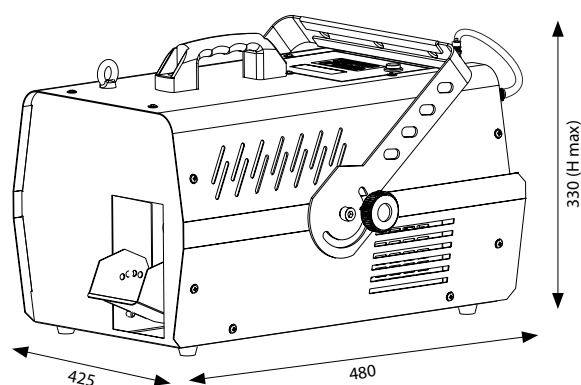



SG HS200 - PRODUCT CODE

EFFECTS

- Hazer effect

CONTROL AND PROGRAMMING

- 1 DMX channel configuration: 1 channel
- USITT DMX 512 protocol
- Radio remote controller included
- Heating time: 2 mins
- Smoke output: 800cuft
- Continue output
- Manual mode adjustable via display

STRUCTURE AND CABINET


- Metal housing, black color
- Red LED display
- Led indicator for heating and ready to smoke
- High performance pump for optimal emission
- High speed fan
- External tank: 2 litres
- DMX 3-poles XLR In/Out connectors
- IP rating: IP20
- For best applications and correct function we recommend using Sagitter fluids

POWER SUPPLY

- Input Voltage: AC~230V, 50Hz
- Max Power: 480W @ 230VAC
- Power IN connection with VDE sockets
- Power supply cable 1,5 mt included

WEIGHT AND DIMENSIONS

- Net weight: 4,7 kg
- Dimensions: 357x231x304 mm

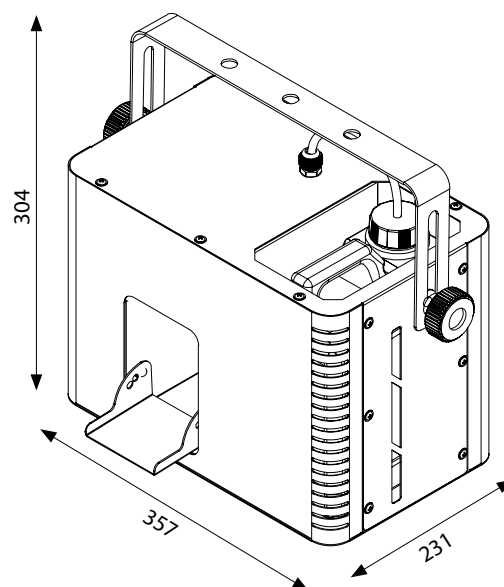



SG MIMETIKM - PRODUCT CODE

EFFECTS

- Smoke effect

CONTROL AND PROGRAMMING

- Radio remote controller included
- Wired remote controller with built-in timer
- Heating time: 5 min
- Continue output time: 20 sec.

STRUCTURE AND CABINET


- Metal housing, black/green color
- Adjustable bracket
- Led indicator for heating and ready to smoke
- High performance pump for long-range
- External tank: 0,9 litres
- IP rating: IP20
- For best applications and correct function we recommend using Sagitter fluids

POWER SUPPLY

- Input Voltage: AC~230V, 50 Hz
- Max power: 900W @ 230VAC

WEIGHT AND DIMENSIONS

- Net weight: 4,5 kg
- Dimensions: 235x240x140 mm

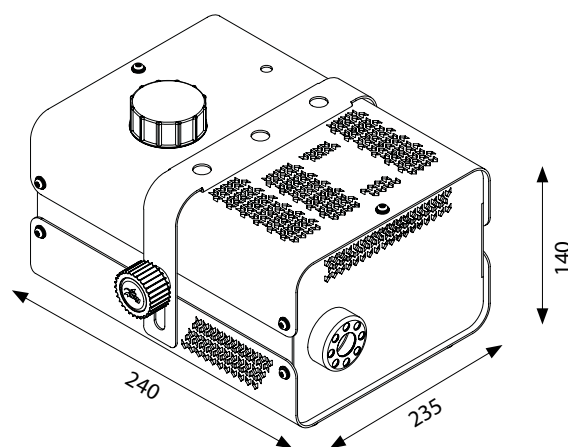



SG MIMETIKXL - PRODUCT CODE

EFFECTS

- Smoke effect

CONTROL AND PROGRAMMING

- USITT DMX 512 protocol
- Radio remote controller included
- Manual mode with specific button
- Heating time: 8 mins
- Continue output time: 10s

STRUCTURE AND CABINET


- Metal housing, black/green color
- Comfortable handle for transportation
- Red led indicator for heating and ready to smoke
- High performance pump for long-range
- External tank: 2,5 litres
- DMX 3-poles XLR In/Out connectors
- IP rating: IP20
- For best applications and correct function we recommend using Sagitter fluids

POWER SUPPLY

- Input Voltage: AC~230V 50Hz
- Max power: 1500W @ 230VAC
- Power IN connection with VDE sockets
- Power supply cable 1,5 mt included

WEIGHT AND DIMENSIONS

- Net weight: 7,3 kg
- Dimensions: 190x440x305 mm

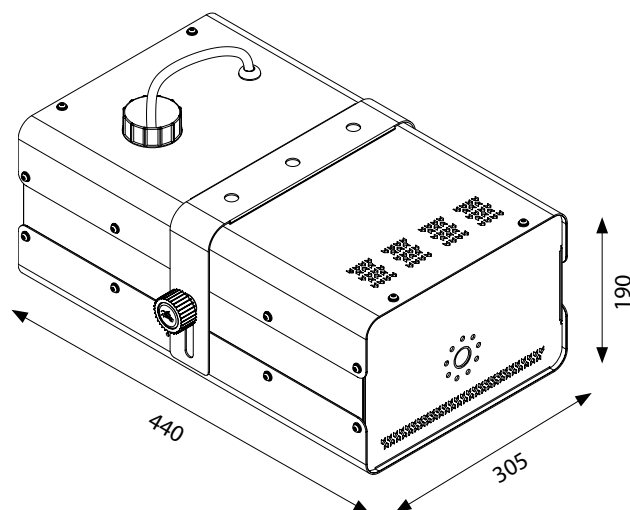



SG ARS1500FC - PRODUCT CODE

EFFECTS

- Smoke effect
- Geyser smoke effect 6 LED RGB full color

CONTROL AND PROGRAMMING

- 1 DMX configurations available: 7 channels
- Independent control smoke output and leds
- USITT DMX 512 protocol
- Radio remote controller included
- Auto mode with 7 pre-programmed colors
- Manual mode with specific button
- Automatic safety shutdown circuit for pump prevention in case of finished liquid in the circuit
- Heating time: 5 min
- Continue output time: 10 sec.

STRUCTURE AND CABINET


- Metal housing, black color
- Red LED display
- Comfortable handle for transportation
- Led indicator for heating and ready to smoke
- High performance pump for long-range smoke jet
- Auxiliary pump for instant smoke stop
- Double working mode: horizontal and vertical
- External tank: 2,5 litres
- DMX 3-5 poles XLR In/Out connectors
- IP rating: IP20
- For best applications and correct function we recommend using Sagitter fluids

POWER SUPPLY

- Input Voltage: AC~230V, 50 Hz
- Max power: 1600W @ 230VAC
- Power IN connection with VDE sockets
- Power supply cable 1mt included

WEIGHT AND DIMENSIONS

- Net weight: 8,5 kg
- Dimensions: 415x358x225 mm

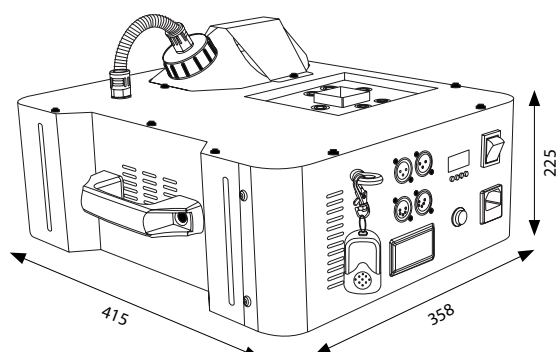



SG ARS900FC - PRODUCT CODE

EFFECTS

- Smoke effect
- Geyser smoke effect 6 LED RGB full color

CONTROL AND PROGRAMMING

- 1 DMX configurations available: 7 channels
- Independent control smoke output and leds
- USITT DMX 512 protocol
- Radio remote controller included
- Auto mode with 7 pre-programmed colors
- Manual mode with specific button
- Automatic safety shutdown circuit for pump prevention in case of finished liquid in the circuit
- Heating time: 5 min
- Continue output time: 10 sec.

STRUCTURE AND CABINET



- Metal housing, black color
- Red LED display
- Comfortable handle for transportation
- Led indicator for heating and ready to smoke
- High performance pump for long-range smoke jet
- Auxiliary pump for instant smoke stop
- Double working mode: horizontal and vertical
- External tank: 2,5 litres
- DMX 3-poles XLR In/Out connectors
- IP rating: IP20
- For best applications and correct function we recommend using Sagitter fluids

POWER SUPPLY

- Input Voltage: AC~230V, 50 Hz
- Max power: 950wW @ 230VAC
- Power IN connection with VDE sockets
- Power supply cable 1mt included

WEIGHT AND DIMENSIONS

- Net weight: 7 kg
- Dimensions: 408x264x192 mm

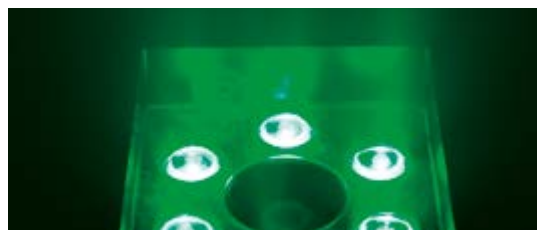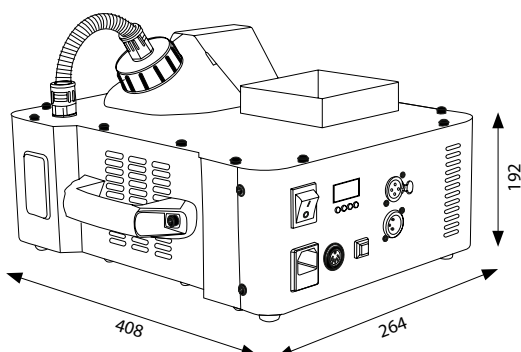



SG ARS900DJ - PRODUCT CODE

EFFECTS

- Smoke effect
- Geyser smoke effect 3 LED RGB full color

CONTROL AND PROGRAMMING

- Radio remote controller included
- Static color mode: 7 built-in colors
- Auto mode: 1 built-in color change program
- Manual mode with specific button
- Heating time: 8 min
- Continue output time: 10 sec.

STRUCTURE AND CABINET



- Metal housing, black color
- Comfortable handle for transportation
- Led indicator for heating and ready to smoke
- High performance pump for long-range smoke jet
- Double working mode: horizontal and vertical
- External tank: 0,25 litres
- IP rating: IP20
- For best applications and correct function we recommend using Sagitter fluids

POWER SUPPLY

- Input Voltage: AC~230V, 50 Hz
- Max power: 900W @ 230VAC
- Power IN connection with VDE sockets
- Power supply cable 1mt included

WEIGHT AND DIMENSIONS

- Net weight: 3,5 kg
- Dimensions: 280x245x140 mm

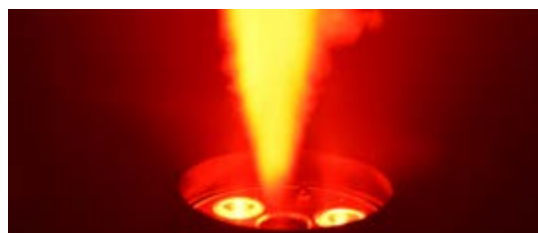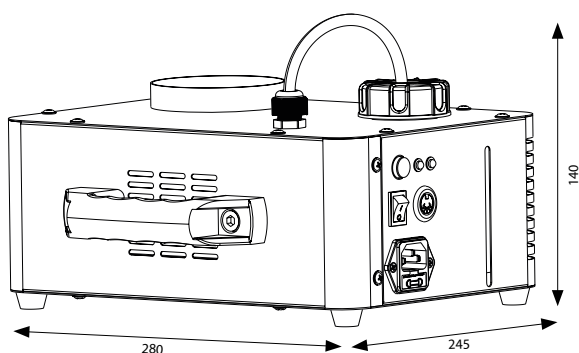



SAGITTER
genuine
ACCESSORIES

ACCESSORIES

PRO FLUIDS



LIGHT

Light version, suitable for small environments and 'occasional' users who want to get a nice smoke effect minimizing the expenses. This version can also be used for those who need a fast fading effect. 5 liters tank

SG SMKFLD5L

MEDIUM

Version that provides an adequate coverage and durability for any kind of show, suitable for any location, i.e. live events, theaters and nightclubs. 5 liters tank

SG SMKFLD5M

HIGH DENSITY

Condensed version which guarantees a long durability and an adequate coverage for a professional and covering smoke effect. 5 liters tank

SG SMKFLD5D



HAZER

Condensed version which guarantees a long durability and an adequate coverage for a professional and covering smoke effect. 5 liters tank

SG HZRFLD5



QUICK DISSIPATION

Quick dissipation version, this liquid guarantees intensity and fading similar to a CO2 gas effect. 5 liter tank

• SG SMKFLD5QD

ACCESSORIES

LAMPS

CODE	OSRAM	W	V	SOCKET	LIFETIME (H)	LM	PHILIPS	GE	NAED	ANSI	LIF
DOUBLEPLUG HALOGEN											
PLLPP300M38	64662	300	230	GY9,5	2000	5000	6874P	M38-39785			M/38
PLLPP500M40	64672	500	230	GY9,5	2000	8500	6877P	M40-39621			M/40
PLLPP1000T19	64744	1000	230	GX9,5	750	20500	6996P	T19FWP-39657		FWP	T/19
PLLPP200016	64788	2000	230	GY16	400	52000	6994P				CP/72
PLLPS575HTC	93728	575	230	G9,5	300	14900		HPL575-37128	54618		
PLLPP750HTC	93729	750	230	G9,5	300	19750		HPL750-37824			
PAR 36											
PLLPP36V		30	6	screw	100	55000		4515-24673			
PLLPPDWE		650	120	screw	100	24000		DWE-41667			
PAR 56											
PLLPP56V		300	230	GX16d	2000	10000			300PAR56\NSP		
PAR 64											
PLLPP645V		500	230	GX16d	300			CP87-30283			CP/87
PLLPP64A		1000	230	GX16d	300	320000	PAR64NSP	CP60EXC-19909	56332	EXC	CP/60
PLLPP64B		1000	230	GX16d	300	270000	PAR64SP	CP61EXD-19911	56233	EXD	CP/61
PLLPP64C		1000	230	GX16d	300	125000	PAR64FL	CP62EXE-19913	56234	EXE	CP/62
PLLPP6428V		250	28	screw	25			4552-VNSP			
CODE	OSRAM	W	V	SOCKET	LIFETIME (H)	LM	PHILIPS	GE	NAED	ANSI	LIF
Made in China											
DISCHARGE HMI SERIES											
PLLPHMI575CN	HMI 575W/GS	575	VG	SFc 10-4	nd	nd	MSI 575W	CSR575/DE			
DISCHARGE HSD SERIES											
PLLPHSD250CN	HSD 250	250	VG	GY9,5	nd	nd	MSD 250	CSD 250			
DISCHARGE HSR/MSR SERIES											
PLLPHSR575CN	HSR 575/60	575	VG	GX9,5	nd	nd	MSR 575	CSR 575			

ACCESSORIES

LAMPS

CODE	OSRAM	W	V	SOCKET	LIFETIME (H)	LM	PHILIPS	GE	NAED	ANSI	LIF
WOOD TUBE											
PLL18W		18	VG	G13	9000		TLD18W/08	F20T12/BLB			
PLL36W		36	VG	G13	20000		TLD36W/08	F40T12/BLB			
STROBE HIGH POWER											
PLLXP15N		1000	VS	CAP15.8\14.7cab	250	350000	XOP15-OF				
DISCHARGE HMI SERIES											
PLLPHMI575GS	HMI 575W/GS	575	VG	SFc 10-4	1000	49000	MSI 575W	CSR575/DE			
PLLPHMI1200GS	HMI 1200W/GS	1200	VG	SFc 15,5-6	1000	110000	MSI 1200W	CSR1200/DE			
DISCHARGE HSD SERIES											
PLLPHSD250	HSD 250	250	VG	GY9,5	2000	17000	MSD 250				
DISCHARGE HSR/MSR SERIES											
PLLPHSR575	HSR 575/60	575	VG	GX9,5	1000	49000					
PLLPMR1200SA		1200	VG	GY22	750	96000	MSR 1200SA	CSR1200SA			
DISCHARGE REFLECTOR SERIES											
SG LTUHP190W		190/160		2 terminations			UHP 160/190W 0.9 E20.9				
SG LTUHP200W		200/170		2 terminations			TOP UHP 200/170W				
SG LTVIP280W	P-VIP 280/1.0 E20.6	280		2 terminations							
SG PLHRI230	SIRIUS HRI 230W	230		2 terminations	2500						
SG PLHRI280	SIRIUS HRI 280W	280		2 terminations	2000						
SG PLHRI132	SIRIUS HRI 132W	132		2 terminations	6000						
SG PLHRI100	SIRIUS HRI 100W	100		2 terminations	6000						
DISCHARGE FASTFIT SERIES											
SG PL300LK		300		PGJX28	750	23000	MSR Gold 300/2 Mini FastFit1CT/4				
SG PL700LK		700		PGJX50	750	50000	MSR Gold 700/2 FastFit 1CT/8				
SG PL700LK28		700		PGJX28	750	47000	MSR Gold 700/2 Mini FastFit 1CT/4				

ACCESSORIES

SAGITTER DMX CABLES



DMX CABLE 3-poles

Professional DMX cable made in Italy with Neutrik connections series XX XLR 3-poles.
Composition: 1x NC3FXXBAG 1x SG DMXBK 1x NC3MXXBAG. Cable color: Black

- SG DMX3PLU01 - 1 mt.
- SG DMX3PLU02 - 2 mt.
- SG DMX3PLU03 - 3 mt.
- SG DMX3PLU05 - 5 mt.
- SG DMX3PLU10 - 10 mt.
- SG DMX3PLU15 - 15 mt.
- SG DMX3PLU20 - 20 mt.

DMX CABLE 5-poles

Professional DMX cable made in Italy with Neutrik connections series XX XLR 5-poles.
Composition: 1x NC5FXXBAG 1x SG DMXBK 1x NC5MXXBAG. Cable color: Black

- SG DMX5PLU01 - 1 mt.
- SG DMX5PLU02 - 2 mt.
- SG DMX5PLU03 - 3 mt.
- SG DMX5PLU05 - 5 mt.
- SG DMX5PLU10 - 10 mt.
- SG DMX5PLU15 - 15 mt.
- SG DMX5PLU20 - 20 mt.

SDJ DMX CABLES

DMX CABLE 3-poles

Professional DMX 512 cable with YONGSCHENG connectors XLR 3-poles.
Cable color: Black

- SG DMX3CLU02 - 2 mt.
- SG DMX3CLU03 - 3 mt.
- SG DMX3CLU05 - 5 mt.
- SG DMX3CLU010 - 10 mt.

DMX CABLE 5-poles

Professional DMX 512 cable with YONGSCHENG connectors XLR 5-poles.
Cable color: Black

- SG DMX5CLU02 - 2 mt.
- SG DMX5CLU03 - 3 mt.
- SG DMX5CLU05 - 5 mt.
- SG DMX5CLU010 - 10 mt.



ACCESSORIES

CABLES

POWERCON EXTENSION CABLES

SDC775LU015	Powercon cable 3x2,5mm 1,5 mt
SDC775LU025	Powercon cable 3x2,5mm 2,5 mt
SDC775LU05	Powercon cable 3x2,5mm 5 mt
SDC775LU10	Powercon cable 3x2,5mm 10 mt
SM300LU5	Power cable mounth EC female socket - SCHIUKO 3x1mm 5mt
SM300LU10	Power cable mounth EC female socket - SCHIUKO 3x1mm 10mt
SM300LU15	Power cable mounth EC female socket - SCHIUKO 3x1mm 15mt

IP DMX EXTENSION CABLES FOR IP LED SERIES

SG IPCDLU3	DMX cable IP 65 3 mt
SG IPCDLU05	DMX cable IP 65 5 mt
SG IPCDLU10	DMX cable IP 65 10 mt

IP POWER EXTENSION CABLES FOR IP LED SERIES

SG IPCPLU3	Power cable IP 65 3 mt
SG IPCPLU5	Power cable IP 65 5 mt
SG IPCPLU10	Power cable IP 65 10 mt

ACCESSORIES

CABLECROSS

SG CABLECRS2 - PRODUCT CODE

TECHNICAL DATA


- 2 ways cable cross
- Conduits for cable routing up to 30 mm section
- Base made of thermoplastic polyurethane
- Closing panel: made of yellow PVC
- Capacity: ≤ 3000 kg (uniformly distributed load)
- Conduits measures: 1000x30x30 mm
- Platform measures: 1000x45x250 mm
- Weight: 4.0 kg



SG CABLECRS5 - PRODUCT CODE

TECHNICAL DATA

- 5 ways cable cross
- Conduits for cable routing up to 35 mm section
- Base made of thermoplastic polyurethane
- Closing panel: made of yellow PVC
- Capacity: ≤ 4500 kg (uniformly distributed load)
- Conduits measures: 4x(1000x35x40 mm) / 1x(1000x40x40 mm)
- Platform measures: 1000x500x55 mm
- Weight: 9.0 kg

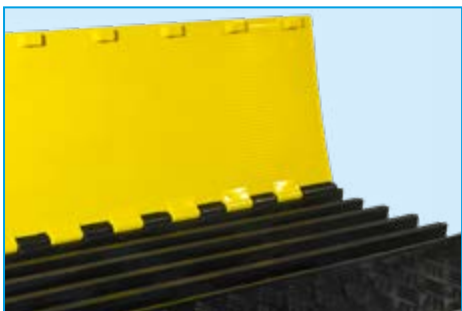

ACCESSORIES

CABLECROSS

SG CABLECVR1S - PRODUCT CODE

TECHNICAL DATA

- 1 way cable cross
- Conduits for cable routing up to 30 mm section
- Cable cross made of thermoplastic polyurethane
- Capacity: ≤ 1000 kg (uniformly distributed load)
- Conduits measures: 1000x40x13 mm
- Platform measures: 1000x135x25 mm
- Weight: 2.0 kg



SG CABLECVR1XS - PRODUCT CODE

TECHNICAL DATA

- 1 way cable cross
- Conduits for cable routing up to 6.4mm section
- Cable cross made of PVC and NBR
- Capacity: ≤ 200 kg (uniformly distributed load) per 9 mt.
- Conduits measures: 9000x19x9.5 mm
- Platform measures: 9000x77x16 mm
- Weight: 7.0 kg



ACCESSORIES

CLAMPS



PLH290BK

Black Simple extruded aluminium coupler



PLH295BK

Black Simple extruded aluminium coupler



PLH10NBK

Black Galvanized steel hook clamp



PLH350BK

Black Simple extruded aluminium coupler



**PLH232
PLH248**

Security PVC covered galvanized stainless steel cable with snap hook.



PLH10N

Galvanized steel hook clamp



PLH270

Simple extruded aluminium coupler



PLH290

Simple extruded aluminium coupler



PLH295

Simple extruded aluminium coupler



PLH300

Simple extruded aluminium coupler



PLH340

Accoppiatore in robusto alluminio 6061 T6 estruso.



PLH420

Staffa zincata regolabile per truss con doppio accoppiatore singolo.



ACCESSORIES

FLIGHTCASES

SG CASESAGOLED	Flightcase with wheels for 4 SAGOLED
SG CASECLUB	Flightcase with wheels for 4 CLUB SERIES SPOT BEAM
SG CASEPIXI5	Flightcase with wheels for 6 PIXI5/5W
SG CASEACLBAR	Flightcase with wheels for 4 ACL LED BAR
SG CASESAGOLEDM	Flightcase for 4 SAGOLED MINI
SG CASESCLWASH	Flightcase with wheels for 4 CLUB WASH
SG CASEHTZ	Flightcase with wheels for 6 HTZ LED
SG CASEHTZCOB	Flightcase with wheels for 6 HTZ LED COB
SG CASEBATI4DLH	Flightcase with wheels for 8 BATI 4DLH with battery charge system
SG CASEQUARTZ100	Flightcase with wheels for 4 QUARTZ100
SG CASEQUARTZ300	Flightcase with wheels for 2 QUARTZ300
SG CASEQUARTZ300X4	Flightcase with wheels for 4 QUARTZ300
SG CASEHALOFM	Flightcase for 4 HALOFWWM60
SG CASEHALOPR	Flightcase with wheels for 4 HALOPFWW 200
SG CASEQUIVER	Flightcase for QUIVER
SG CASEQUIVER1X	Flightcase for QUIVER + 1 QUIVERX
SG CASEQUIVER2X	Flightcase for QUIVER + 2 QUIVERX
SG CASESLIMBAR16DL	Flightcase with wheels for 4 SLIMBAR16DL
SG CASESLIMBAR8DL	Flightcase with wheels for 6 SLIMBAR8DL
SG CASEPIXI5WL	Flightcase with wheels for 8 PIXI5WL
SG CASEHALOFR	Flightcase with wheels for 4 HALOFWW 100/200
SG CASESTUDIOP	Flightcase with wheels for 4 STUDIO PANEL LED
SG CASESOLPAR60	Flightcase with wheels for 6 SOLPAR 60
SG CASESOLPAR150	Flightcase with wheels for 4 SOLPAR 150
SG CASEAQUAPAR	Flightcase with wheels for 6 AQUAPAR
SG CASEQUARIUX	Flightcase with wheels for 6 QUARIUX
SG CASESAGOLED300	Flightcase with wheels for 4 SAGOLED 300
SG CASEBLAZERC	Flightcase with wheels for 4 BLAZER 1500 C
SG CASEIPLD32C	Flightcase with wheels for 4 IPLD 32C DL
SG CASEIPLD BARBAT	Flightcase with wheels for 4 IPLD BAR 8 BATTERY
SG CASEJNRPRO	Flightcase with wheels for 6 JUNIOR PROFILE
SG CASEHALOPM	Flightcase with wheels for 4 HALO PROFILE ZOOM 60
SG CASEBLOK2	Flightcase with wheels for 4 BLOK 2TW
SG CASECLBEAM7R	Flightcase with wheels for 2 CLUB BEAM 7R
SG CASESLIMPARBAT	Flightcase with wheels for 6 SLIMPAR 6 BATTERY
SG CASESLIMBARBAT	Flightcase with wheels for 5 SLIMBAR 8 BATTERY

ACCESSORIES

CODE	DESCRIPTION	COMPATIBLE MODEL
SG SOLPARC60BN	Directional barndoor	SG SOLPARC60Z
SG SOLPARC150BN	Directional barndoor	SG SOLPARC150Z
SG LENS19C	Optics 19°	SG SAGOLEDW - SG SAGOLEDWW
SG LENS26C	Optics 26°	SG SAGOLEDW - SG SAGOLEDWW
SG LENS36C	Optics 36°	SG SAGOLEDW - SG SAGOLEDWW
SG LENS50C	Optics 50°	SG SAGOLEDW - SG SAGOLEDWW
SG IRIS	Iris Accessory	SG SAGOLEDW - SG SAGOLEDWW
SG LENS19M	Optics 19°	SG SAGOLEDWWM - SG SAGOLEDWWM
SG LENS26M	Optics 26°	SG SAGOLEDWWM - SG SAGOLEDWWM
SG LENS36M	Optics 36°	SG SAGOLEDWWM - SG SAGOLEDWWM
SG LENS50M	Optics 50°	SG SAGOLEDWWM - SG SAGOLEDWWM
SG IRISM	Iris Accessory	SG SAGOLEDWWM - SG SAGOLEDWWM
SG LENS19	Optics 19°	SG SAGOLEDWW300 - SG SAGOLEDWW300
SG LENS26	Optics 26°	SG SAGOLEDWW300 - SG SAGOLEDWW300
SG LENS36	Optics 36°	SG SAGOLEDWW300 - SG SAGOLEDWW300
SG LENS50	Optics 50°	SG SAGOLEDWW300 - SG SAGOLEDWW300
SG IRIS	Iris Accessory	SG SAGOLEDWW300 - SG SAGOLEDWW300
SG IRISM	Iris Accessory	SG HALOPWWW60 - SG HALOPWWW60
SG IRIS	Iris Accessory	SG HALOPWWW2045 - SG HALOPWWW1528
SG IRISJ	Iris Accessory	SG JNRPROWW - SG JNRPROCW - SG JNRPRORGW
SG LENS14J	Optics 14°	SG JNRPROWW - SG JNRPROCW - SG JNRPRORGW
SG LENS19J	Optics 19°	SG JNRPROWW - SG JNRPROCW - SG JNRPRORGW
SG LENS26J	Optics 26°	SG JNRPROWW - SG JNRPROCW - SG JNRPRORGW
SG LENS36J	Optics 36°	SG JNRPROWW - SG JNRPROCW - SG JNRPRORGW



SAGITTER

is a brand of

PROEL SPA
(Worldwide Headquarters)
Via alla Ruenia, 37/43
64027 Sant'Omero (TE) - ITALY
Tel. +39 0861 81241
Fax +39 0861 887862
P.I. 00778590679
N.Reg.AEE IT 08020000002762

sagitter.com

