



LIGHTING



# INDEX

## SAGITTER

---

<b>4</b>	Led Moving Heads
<b>7</b>	AcI Leds
<b>11</b>	Architectural Leds
<b>20</b>	Stage Leds
<b>35</b>	Led Projectors
<b>39</b>	Cob Projectors
<b>42</b>	Led Battery Projectors
<b>46</b>	Controllers
<b>49</b>	Ambient Effects

## SDJ


---

<b>54</b>	Moving Heads
<b>63</b>	Led Projectors
<b>74</b>	Stage Leds
<b>78</b>	Led Battery Projectors
<b>80</b>	Led Bars
<b>86</b>	Led Pixel
<b>90</b>	Led Kits
<b>95</b>	Controllers
<b>103</b>	Ambient Effects

## genuine Accessories

---

<b>112</b>	Pro Fluids
<b>114</b>	Lamps
<b>116</b>	DMX Cables
<b>117</b>	Cables
<b>118</b>	Cablecross
<b>120</b>	Clamps
<b>121</b>	Modula Series
<b>128</b>	Flightcases
<b>129</b>	Accessories

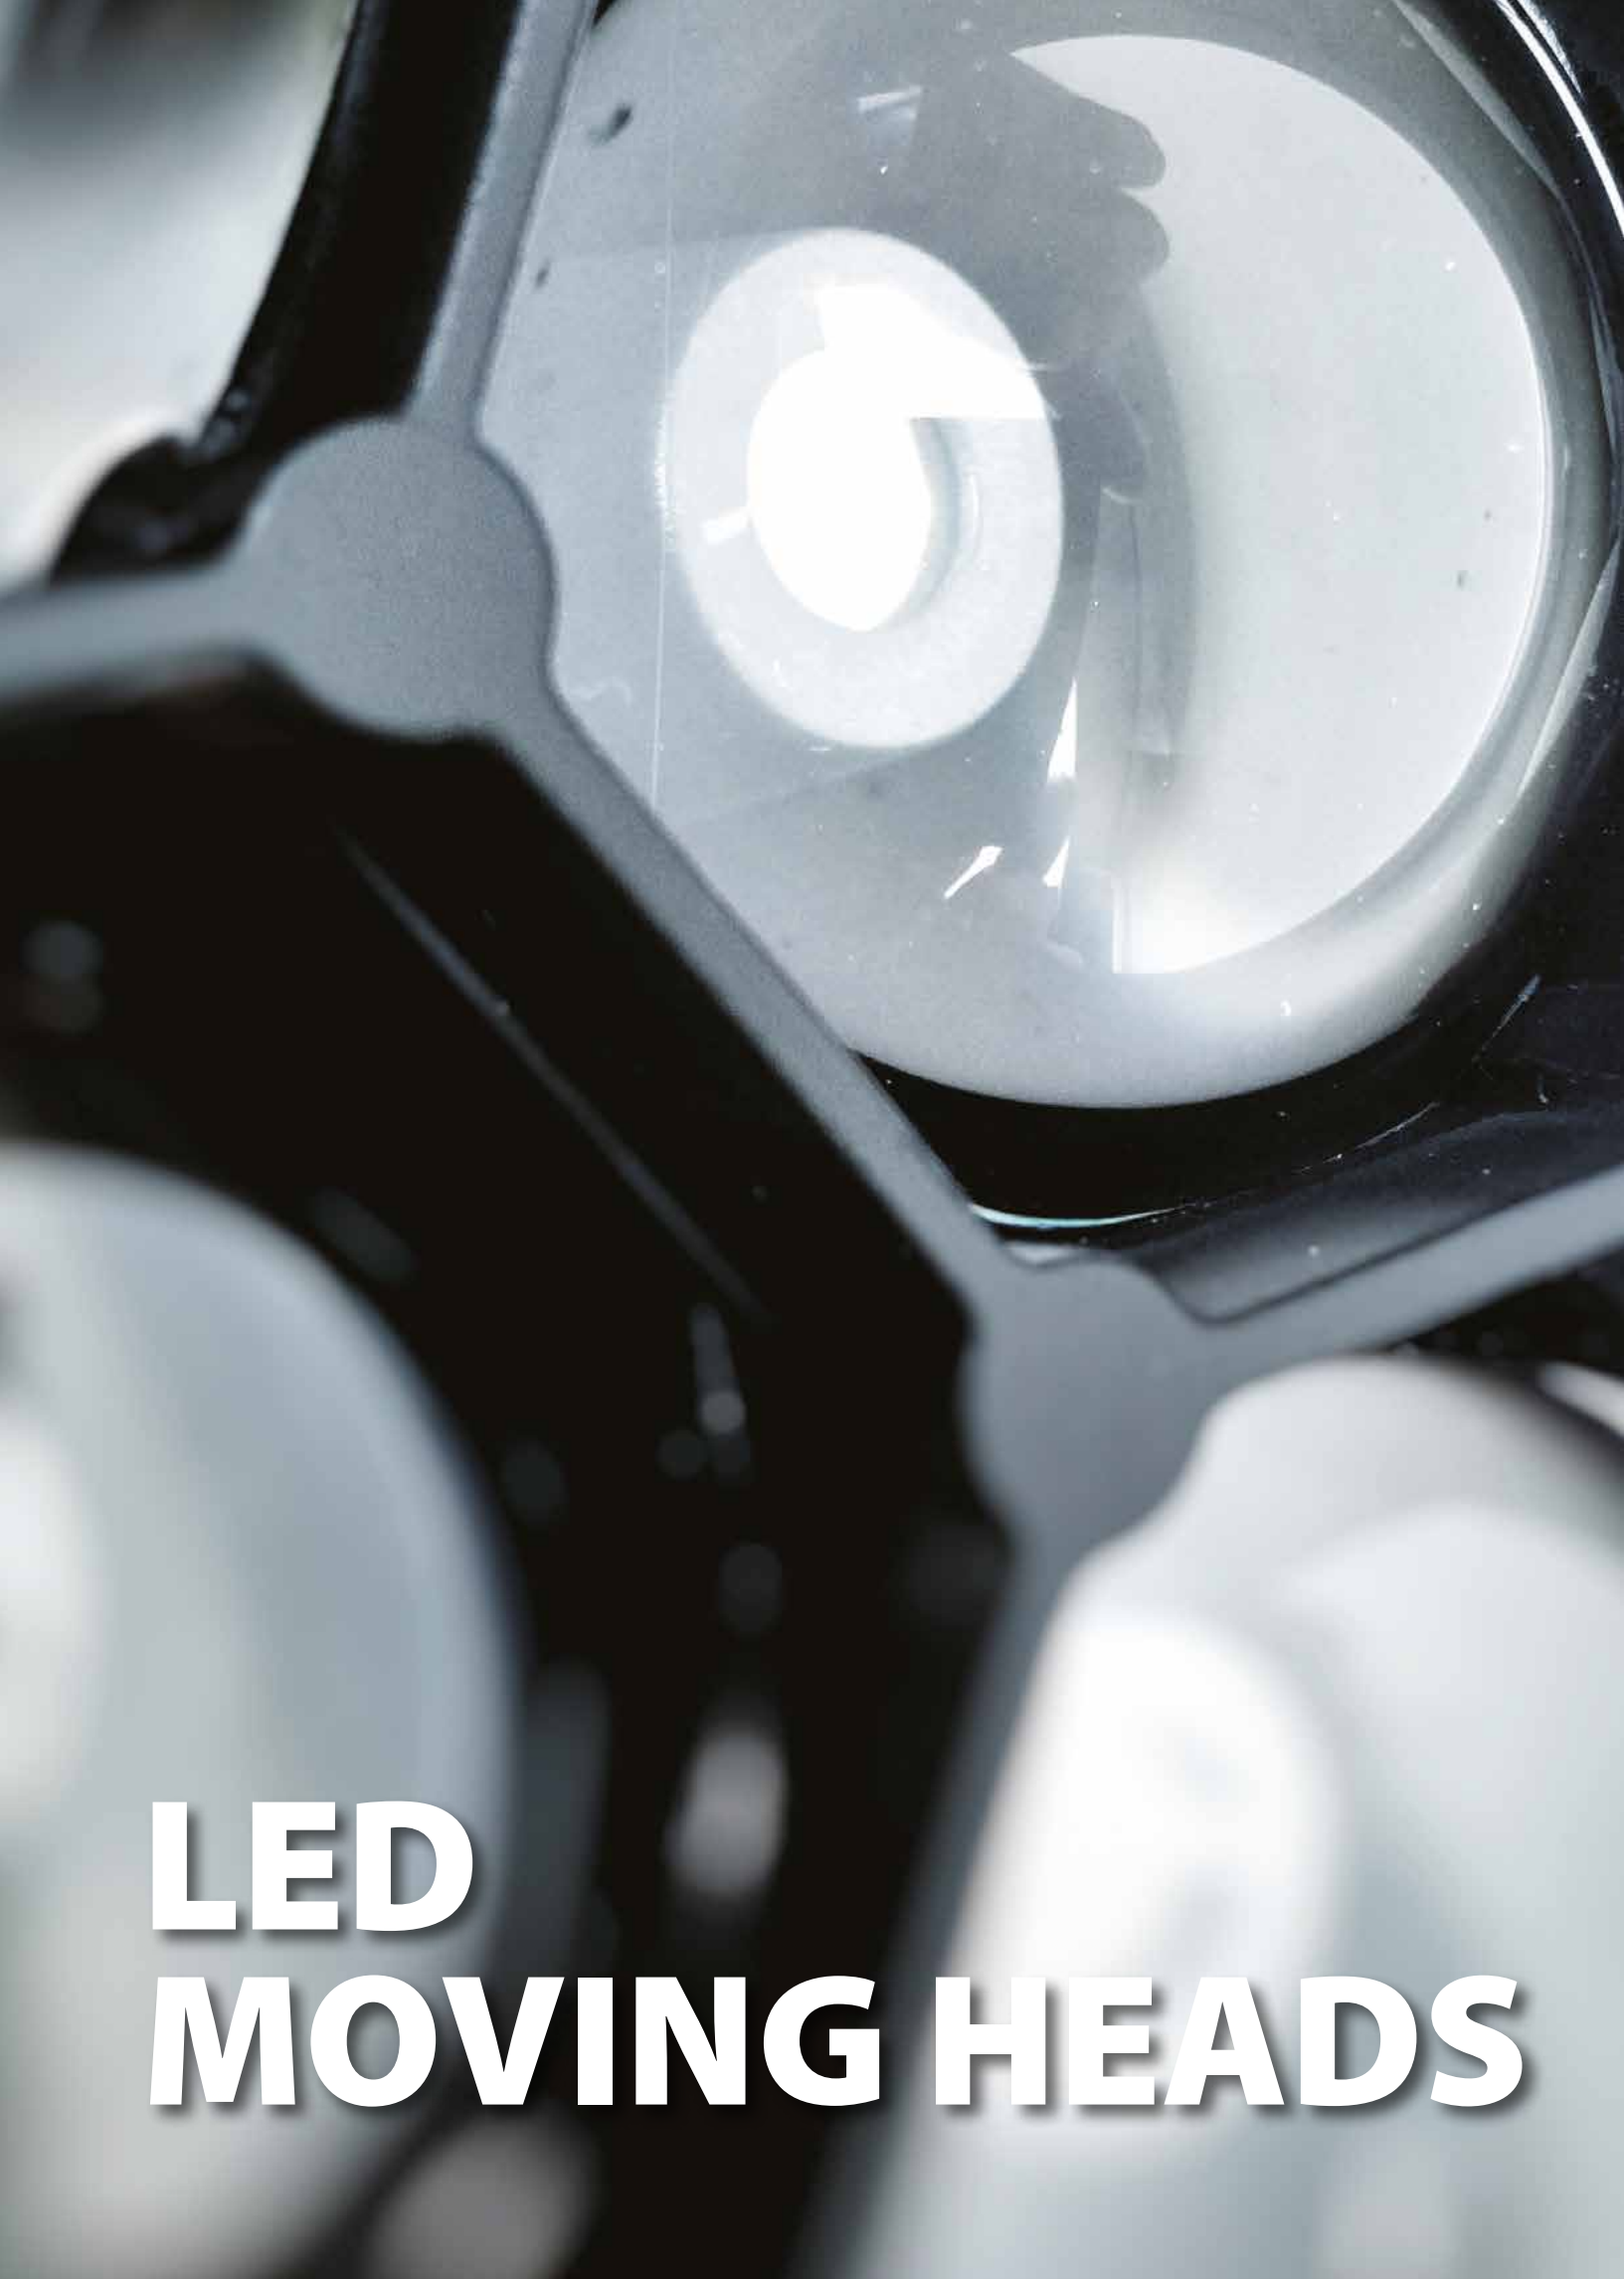

# **LED MOVING HEADS**



# LED MOVING HEADS

## QUARTZ 300



### SG QUARTZ300 - PRODUCT CODE

**SG CASEQUARTZ300** - CASE (2X SG QUARTZ300)

**SG CASEQUARTZ300X4** - CASE (4X SG QUARTZ300)

**SG QUARTZ300KIT** - KIT (2X SG QUARTZ300 + 1X SG CASEQUARTZ300)

### LIGHT SOURCE

- 19x15W RGBW Full Color led
- LED lifespan: >50.000h
- Led refresh frequency: >400Hz anti-flicker

### OPTIC SYSTEM

- Beam angle: motorized zoom from 8° to 62°
- Luminous flux: 8600Lux (5m – full ON – 8°) / 800Lux (5m – full ON – 62°)

### COLOR SYSTEM

- RGBW full color mixing
- Infinite chromatic possibilities

### EFFECTS

- Linear dimmer 0-100%
- Electronic high speed strobe from 1 to 20 flashes/s, adjustable speed
- Random strobe and pulse effect with adjustable speed
- Single Pixel control
- Color macros and Pixel macros selectable from dmx

### CONTROL AND PROGRAMMING

- 3 different dmx configurations: 14/20/92 channels
- USITT DMX 512 protocol
- Pan&Tilt 8/16 bit resolution selectable
- Master/Slave mode
- Reset via dmx

### STRUCTURE AND CABINET


- Metal housing and high resistance plastic covers, black color
- LCD graphic color display
- PAN 630°/540°/360° selection and TILT 270°/180°/90° selection
- Mounting points: 1 pair of ¼ turn lock omega holders
- Automatic Pan&Tilt repositioning after accidental movement
- DMX 3-poles XLR In/Out connections
- IP rating: IP20
- Forced air fan cooling system with electronic control

### POWER SUPPLY

- Input Voltage: AC~100-240V 50/60Hz
- Switching power supply unit
- Max power: 350W @ 230VAC
- In/Out connection with Powercon sockets
- Power supply cable included

### WEIGHT AND DIMENSIONS

- Net weight: 11,5 kg
- Dimensions: 420x205x450 mm

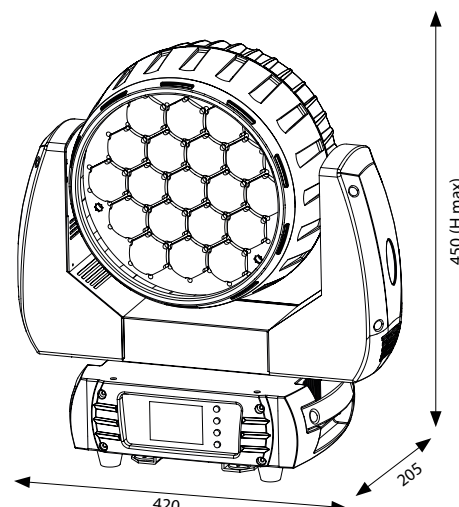

# LED MOVING HEADS

## QUARTZ 100



**SG QUARTZ100** - PRODUCT CODE  
**SG CASEQUARTZ100** - CASE (4X SG QUARTZ100)

### LIGHT SOURCE

- 7x15W RGBW Full Color led
- LED lifespan: >50.000h
- Led refresh frequency: >400Hz anti-flicker

### OPTIC SYSTEM

- Beam angle: motorized zoom from 8° to 62°
- Luminous flux: 2167Lux (5m – full ON – 8°) / 154Lux (5m – full ON – 62°)

### COLOR SYSTEM

- RGBW full color mixing
- Infinite chromatic possibilities

### EFFECTS

- Linear dimmer 0-100%
- Electronic high speed strobe from 1 to 20 flashes/s, adjustable speed
- Random strobe and pulse effect with adjustable speed
- Single Pixel control
- Color macros and Pixel macros selectable from dmx

### CONTROL AND PROGRAMMING

- 3 different dmx configurations: 14/20/44 channels
- USITT DMX 512 protocol
- Pan&Tilt 8/16 bit selectable resolution
- Master/Slave mode
- Reset via dmx

### STRUCTURE AND CABINET


- Metal housing and high resistance plastic covers, black color
- LCD graphic color display
- PAN 630°/540°/2700° selection and TILT 270°/180°/90° selection
- Mounting points: 1 pair of ¼ turn lock omega holders
- Automatic Pan&Tilt repositioning after accidental movement
- DMX 3-poles XLR In/Out connections
- IP rating: IP20
- Forced air fan cooling system with electronic control

### POWER SUPPLY

- Input Voltage: AC~100-240V 50/60Hz
- Switching power supply unit
- Max power: 110W @ 230VAC
- In/Out connection with Powercon sockets
- Power supply cable included

### WEIGHT AND DIMENSIONS

- Net weight: 6,2 kg
- Dimensions: 290x160x350 mm

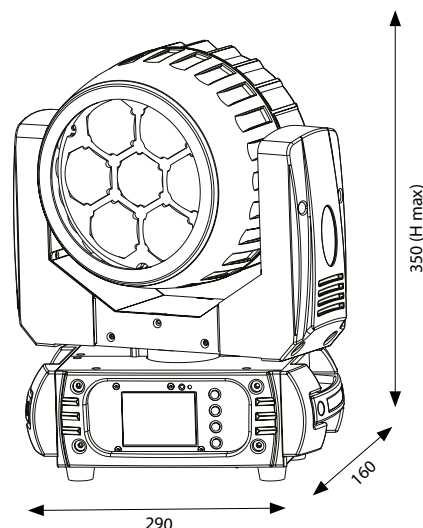




**ACL  
LEDs**

# ACL LEDS

## ACL BAR 10

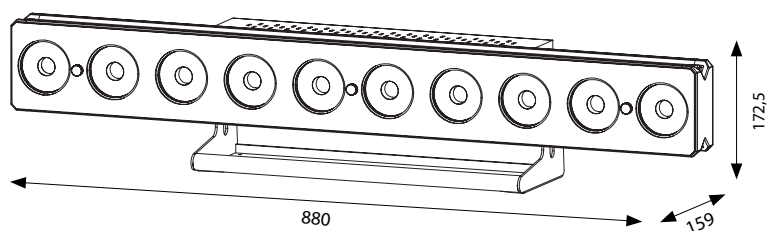

**SG ACLBAR10** - PRODUCT CODE  
**SG CASEACLBAR** - CASE (4X SG ACLBAR10)

### LIGHT SOURCE

- 10x15W led RGBW Full Color
- LED lifespan: > 50.000h
- LED refresh frequency: > 400Hz flicker-free

### OPTIC SYSTEM

- Beam Angle: 4°

### COLOR SYSTEM

- LED source RGBW Full color
- Infinite chromatic possibilities

### EFFECTS

- Linear dimmer 0-100%
- Adjustable strobe effect
- Color macros selectable via DMX
- Single pixel control
- Removable frost filter included

### CONTROL AND PROGRAMMING

- 5 DMX configurations available: 4/6/8/40/44 channels
- USITT DMX 512 protocol
- Art-Net protocol
- Master/Slave mode
- Auto mode
- Sound mode

### STRUCTURE AND CABINET

- Die cast aluminium and metal housing, black color
- Blue LCD graphic display
- "Light up" positioning with adjustable angle
- IP rating: IP20
- DMX 3/5-poles XLR In/Out connectors
- In/Out Art-Net connectors
- Convection cooling system without fans

### POWER SUPPLY

- Input Voltage: AC~100-240V, 50/60 Hz
- Switching power supply unit
- Max power: 160W @ 230VAC
- In/Out connection with Powercon sockets
- Power supply cable 1mt included

### WEIGHT AND DIMENSIONS

- Net weight: 9,4 kg
- Dimensions: 880x159x172,5 mm



**SG ACLBAR5 - PRODUCT CODE**  
**SG CASEACLBAR - CASE (4X SG ACLBAR5)**

**LIGHT SOURCE**

- 5x15W led RGBW Full Color
- LED lifespan: > 50.000h
- LED refresh frequency: > 400Hz flicker-free

**OPTIC SYSTEM**

- Beam Angle: 4°

**COLOR SYSTEM**

- LED source RGBW Full color
- Infinite chromatic possibilities

**EFFECTS**

- Linear dimmer 0-100%
- Adjustable strobe effect
- Color macros selectable via DMX
- Single pixel control
- Removable frost filter included

**CONTROL AND PROGRAMMING**

- 5 DMX configurations available: 4/6/8/20/24 channels
- USITT DMX 512 protocol
- Art-Net protocol
- Master/Slave mode
- Auto mode
- Sound mode

**STRUCTURE AND CABINET**


- Die cast aluminium and metal housing, black color
- Blue LCD graphic display
- "Light up" positioning with adjustable angle
- IP rating: IP20
- DMX 3/5-poles XLR In/Out connectors
- In/Out Art-Net connectors
- Convection cooling system without fans

**POWER SUPPLY**

- Input Voltage: AC~100-240V, 50/60 Hz
- Switching power supply unit
- Max power: 85W @ 230VAC
- In/Out connection with Powercon sockets
- Power supply cable 1mt included

**WEIGHT AND DIMENSIONS**

- Net weight: 6 kg
- Dimensions: 440x160x172,5 mm

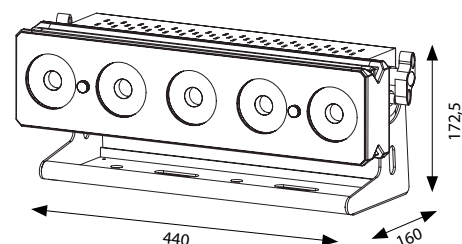



# ACL PAR BATTERY



**SG ACLPARBATBKC** - PRODUCT CODE BLACK VERION  
**SG ACLPARBATWHC** - PRODUCT CODE WHITE VERION  
**SG ACLPARBAG** - SOFT BAG (6X SG ACLPARBATBKC)  
**SG ACLPARCHR** - CHARGER FOR 6X SG ACLPARBATBKC

## LIGHT SOURCE

- 1x15W led RGBW Full Color
- LED lifespan: > 50.000h
- LED refresh frequency: > 400Hz anti flicker

## OPTIC SYSTEM

- Beam Angle: 4°
- Luminous flux: 2300 lux @ 5m (full on max power)

## COLOR SYSTEM

- LED source RGBW Full color
- Infinite chromatic possibilities

## EFFECTS

- Linear dimmer 0-100%
- Adjustable strobe effect
- Color macros selectable via DMX
- Two removable frost filters included

## CONTROL AND PROGRAMMING

- 4 DMX configurations available: 1/4/6/7 channels
- USITT DMX 512 protocol
- Built-in wireless DMX transceiver by Wireless Solution
- Master/Slave mode
- Auto mode with 3 different programs with adjustable strobe and speed
- Sound mode with adjustable sensitivity
- Remote controller included

## STRUCTURE AND CABINET


- Die cast aluminium housing, black color
- Blue LCD graphic display
- "Light up" positioning with adjustable angle
- IP rating: IP20
- Convection cooling system without fans

## POWER SUPPLY

- Input Voltage: 12-15VDC – 2A min, for normal working and battery recharge
- Max power: 24W
- Internal rechargeable battery: 11,1VDC
- Capacity: 2,6Ah
- Runtime battery: ~2/4/6/8h (Adjustable max power)
- Charging cycle: ~5h (Projector off)
- Power adapter included

## WEIGHT AND DIMENSIONS

- Net weight: 1,2 kg
- Dimensions: 130x180x160 mm

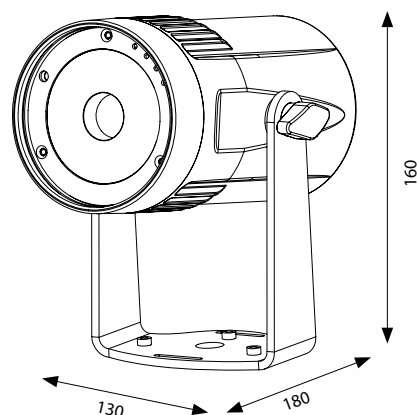




# ARCHITECTURAL LEDs

# ARCHITECTURAL LEDS

# QUARIUX

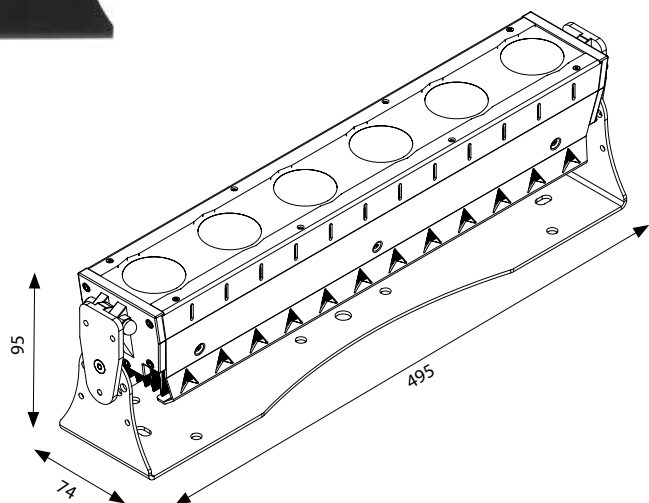

**SG QUARIUXRGB** - PRODUCT CODE RGB VERSION  
**SG QUARIUXRGBZ** - PRODUCT CODE RGB VERSION ZOOM  
**SG QUARIUXRGBW** - PRODUCT CODE RGBW VERSION  
**SG QUARIUXRGBWZ** - PRODUCT CODE RGBW VERSION ZOOM  
**SG QUARIUXRGBL** - PRODUCT CODE RGB-LIME VERSION  
**SG QUARIUXRGBLZ** - PRODUCT CODE RGB-LIME VERSION ZOOM  
**SG QUARIUXWW** - PRODUCT CODE Warm White VERSION  
**SG QUARIUXCW** - PRODUCT CODE COLD WHITE VERSION  
**SG QUARIUXVW** - PRODUCT CODE VARIABLE WHITE VERSION  
**SG CASEQUARIUX** - CASE (6x SG QUARIUX)

## LIGHT SOURCE

- 6x40W COB led
- LED lifespan: >50.000h
- LED refresh frequency: >500Hz flicker free

## OPTIC SYSTEM

- Beam angle: 12° (standard)
- SSZ: Solid State Zoom (from 12° to 90°) upon request
- Optional optic: 24° - 48° - 80° - 12°x90° (asymmetric)

## COLOR SYSTEM

- 3 in 1 led source RGB Full Color (standard)
- Available possibilities: RGBW – RGBL – WW – CW – VW
- Macro colors selectable via DMX
- Halogen and CMY Simulation

## EFFECTS

- Linear dimmer 16 bit 0 - 100%
- Electronic strobo 1-20 flash/s adjustable speed
- Overboost Blinder

## CONTROL AND PROGRAMMING

- DMX configurations availables: 1/2/3/5/7/10 channels
- 4 dimmer curves selectables
- USITT DMX 512 protocol
- Master/Slave mode
- Presetted macro colors with speed regulation
- Static Color: static reproduction of one color
- Touch pad with led indicators
- Built-in wireless DMX by Wireless Solution

## STRUCTURE

- Aluminium structure, available in black or customizable with other colors
- High tightness Lexan, resistant to cuts and perforations
- Fast coupling system
- Bracket for anchoring and ground support
- IP rating: IP 67
- Convection cooling system without fans
- Optional barndoor
- Operating temperature -20°C ~ 40°C

## POWER SUPPLY

- Input Voltage: ~88-264Vac 47/63Hz
- Universal switching power supply
- Double temperature control
- Max power: 200W @ 230VAC
- In/Out power connection

## WEIGHT AND DIMENSIONS

- Net weight: 5,7 kg
- Dimension: 495x74x95 mm






# ARCHITECTURAL LEDS

## IP LED 32C DL



NEW

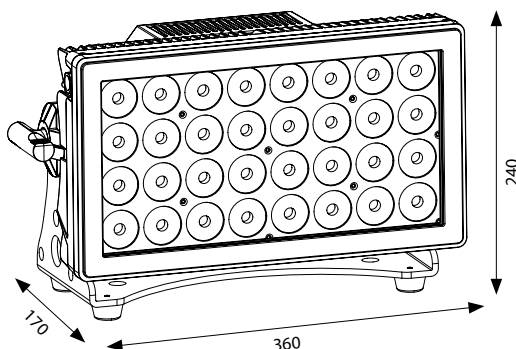

**SG IP LED 32C DLWD** - PRODUCT CODE  
**SG CASE IP LED 32C** - CASE (4X SG IP LED 32C DLWD)  
**SG IP LED 32C BN** - BARNDOOR

### LIGHT SOURCE

- 32x12W led RGBWA-UV Full Color
- LED lifespan: > 50.000h
- LED refresh frequency: > 400Hz flicker-free

### OPTIC SYSTEM

- Beam Angle: 25°
- Luminous flux: 2500lux @ 5m (full on)

### COLOR SYSTEM

- LED source RGBWA-UV Full color
- Infinite chromatic possibilities

### EFFECTS

- Linear dimmer 0-100%
- Adjustable strobe effect
- Color macros selectable via DMX
- 8 sectors control

### CONTROL AND PROGRAMMING

- 6 DMX configurations available: 6/10/11/16/48/96 channels
- Key lock password for display lock
- USITT DMX 512 protocol
- Built-in Wireless DMX by Wireless Solution
- Master/Slave mode
- Static color mode
- Auto mode with 4 different programs selectable from the display, with speed adjustment
- Color mode with 63 different pre-programmed color macros
- White balance control

### STRUCTURE AND CABINET

- Die cast aluminium housing, black color
- Blue LCD graphic display
- Soft touch buttons
- Front tempered glass
- "Light up" positioning with adjustable angle
- IP rating: IP65
- IP65 DMX 3-poles XLR In/Out connectors
- Low Noise controlled forced ventilation cooling system
- Frost filter included

### POWER SUPPLY

- Input Voltage: AC~100-240V, 50/60 Hz
- Switching power supply unit
- Max Power: 390W @ 230VAC
- IP65 True ONE In/Out connectors

### WEIGHT AND DIMENSIONS

- Net weight: 8,2 kg
- Dimensions: 360x170x240 mm

# ARCHITECTURAL LEDS

## IP LED 24C



### SG IPLED24C - PRODUCT CODE

#### LIGHT SOURCE

- 24x8W led RGBW Full Color
- LED lifespan: > 50.000h
- LED refresh frequency: > 400Hz flicker-free

#### OPTIC SYSTEM

- Beam Angle: 25°

#### COLOR SYSTEM

- LED source RGBW Full color
- Infinite chromatic possibilities

#### EFFECTS

- Linear dimmer 0-100%
- Adjustable strobe effect
- Color macros selectable via DMX

#### CONTROL AND PROGRAMMING

- 3 DMX configurations available: 3/6/7 channels
- Key lock password for display lock
- USITT DMX 512 protocol
- Master/Slave mode
- Auto mode
- Remote controller included

#### STRUCTURE AND CABINET


- Die cast aluminium housing
- Blue LCD graphic display
- Front tempered glass
- "Light up" positioning with adjustable angle
- IP rating: IP65
- IP65 DMX In/Out connectors
- Convection cooling system without fans

#### POWER SUPPLY

- Input Voltage: AC~100-240V, 50/60 Hz
- Switching power supply unit
- Max power: 200W @ 230VAC
- IP65 In/Out power connection

#### WEIGHT AND DIMENSIONS

- Net weight: 8,4 kg
- Dimensions: 288x130x325,6 mm

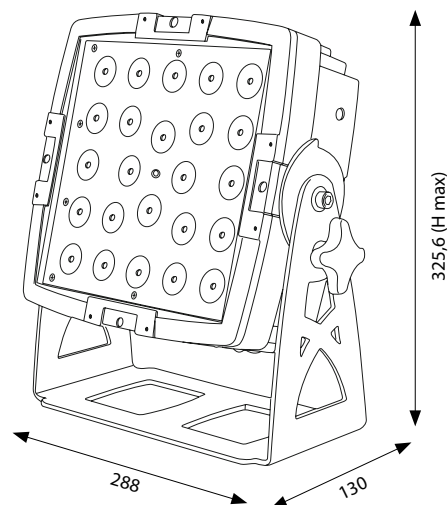



# ARCHITECTURAL LEDS

## IP LED 9C



### SG IPLED9C - PRODUCT CODE

#### LIGHT SOURCE

- 9x8W led RGBW Full Color
- LED lifespan: > 50.000h
- LED refresh frequency: > 400Hz flicker-free

#### OPTIC SYSTEM

- Beam Angle: 25°

#### COLOR SYSTEM

- LED source RGBW Full color
- Infinite chromatic possibilities

#### EFFECTS

- Linear dimmer 0-100%
- Adjustable strobe effect
- Color macros selectable via DMX

#### CONTROL AND PROGRAMMING

- 3 DMX configurations available: 3/6/7 channels
- Key lock password for display lock
- USITT DMX 512 protocol
- Master/Slave mode
- Auto mode
- Remote controller included

#### STRUCTURE AND CABINET


- Die cast aluminium housing
- Blue LCD graphic display
- Front tempered glass
- "Light up" positioning with adjustable angle
- IP rating: IP65
- IP65 DMX In/Out connectors
- Convection cooling system without fans

#### POWER SUPPLY

- Input Voltage: AC~100-240V, 50/60 Hz
- Switching power supply unit
- Max power: 80W @ 230VAC
- IP65 In/Out power connection


#### WEIGHT AND DIMENSIONS

- Net weight: 3,8 kg
- Dimensions: 202x122,3x222 mm

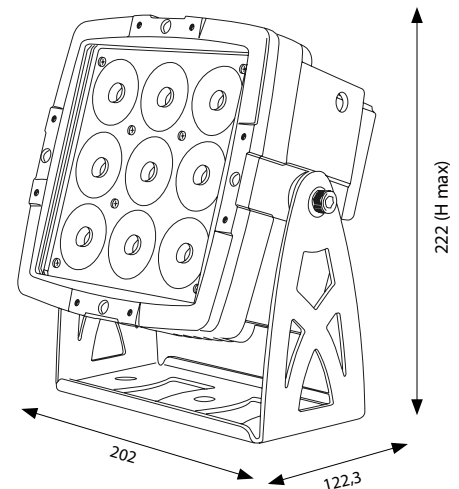

# ARCHITECTURAL LEDS

## IP LED BAR 12C

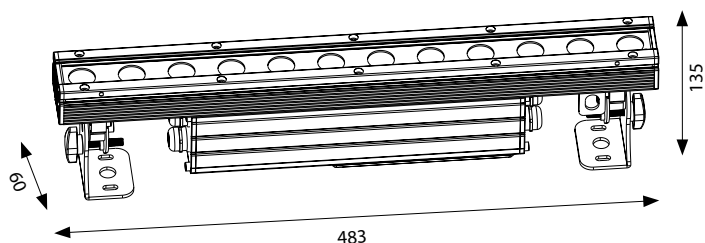

### SG IP LED BAR 12C - PRODUCT CODE

#### LIGHT SOURCE

- 12x8W led RGBW Full Color
- LED lifespan: > 50.000h
- LED refresh frequency: > 400Hz flicker-free
- Optic system
- Beam Angle: 15°
- Luminous flux: 1221 lux @3mt

#### COLOR SYSTEM

- LED source RGBW Full color
- Infinite chromatic possibilities

#### EFFECTS

- Linear dimmer 0-100%
- Adjustable strobe effect
- Color macros selectable via DMX
- 2 sector control system

#### CONTROL AND PROGRAMMING

- 5 DMX configurations available: 3/4/7/8/10 channels
- USITT DMX 512 protocol
- Master / Slave mode
- Static color mode
- Automatic mode with 5 different programs selectable from the display
- Effect mode with 8 different programs selectable from the display
- Color mode with 6 different programs selectable from the display
- 4 dimmer curve

#### STRUCTURE AND CABINET

- Die cast aluminium housing, black color
- OLED display
- Soft touch buttons
- Front tempered glass
- Antiglare blade (included)
- "Light up" positioning with adjustable angle
- IP rating: IP65
- IP65 DMX In/Out connectors
- Convection cooling system without fans

#### POWER SUPPLY

- Input Voltage: AC~100-240V, 50/60 Hz
- Switching power supply unit
- Max power: 96W @ 230VAC
- IP65 In/Out power connection


#### WEIGHT AND DIMENSIONS

- Net weight: 3,3 kg
- Dimensions: 483x60x135 mm



# ARCHITECTURAL LEDS

## IP LED BAR 24C

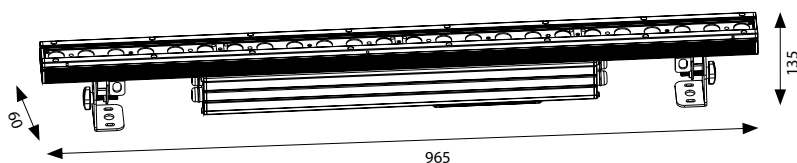

### SG IPLEDBAR24C - PRODUCT CODE

#### LIGHT SOURCE

- 24x8W led RGBW Full Color
- LED lifespan: > 50.000h
- LED refresh frequency: > 400Hz flicker-free

#### OPTIC SYSTEM

- Beam Angle: 15°
- Luminous flux: 1221 lux @3mt

#### COLOR SYSTEM

- LED source RGBW Full color
- Infinite chromatic possibilities

#### EFFECTS

- Linear dimmer 0-100%
- Adjustable strobe effect
- Color macros selectable via DMX
- 4 sector control system

#### CONTROL AND PROGRAMMING

- 7 DMX configurations available: 3/4/7/8/10/16/20 channels
- USITT DMX 512 protocol
- Master / Slave mode
- Static color mode
- Automatic mode with 5 different programs selectable from the display
- Effect mode with 8 different programs selectable from the display
- Color mode with 6 different programs selectable from the display
- 4 dimmer curve

#### STRUCTURE AND CABINET

- Die cast aluminium housing
- OLED display
- Soft touch buttons
- Front tempered glass
- Antiglare blade (included)
- "Light up" positioning with adjustable angle
- IP rating: IP65
- IP65 DMX In/Out connectors
- Convection cooling system without fans

#### POWER SUPPLY

- Input Voltage: AC~100-240V, 50/60 Hz
- Switching power supply unit
- Max power: 192W @ 230VAC
- IP65 In/Out power connection

#### WEIGHT AND DIMENSIONS

- Net weight: 5,6 kg
- Dimensions: 965x60x135 mm

## IP LED MICRO BAR 54C



### SG IP LED MICRO BAR 54C - PRODUCT CODE

#### LIGHT SOURCE

- 54x3W led RGB
- LED lifespan: > 50.000h
- LED refresh frequency: > 400Hz flicker-free

#### OPTIC SYSTEM

- Beam Angle: 60x10°

#### COLOR SYSTEM

- LED source RGB
- Infinite chromatic possibilities

#### EFFECTS

- Linear dimmer 0-100%
- Adjustable strobe effect
- Color macros selectable via DMX

#### CONTROL AND PROGRAMMING

- 5 DMX configurations available: 1/3/4/7/10 channels
- USITT DMX 512 protocol
- Master/Slave mode
- Auto mode with 10 different programs selectable from the display with speed adjustment
- Static color mode with strobe adjustment
- Color mode with 55 pre-programmed color macros

#### STRUCTURE AND CABINET


- Die cast aluminium housing, black color
- Color LCD display
- Front tempered glass
- "Light up" positioning with adjustable angle
- IP rating: IP65
- IP65 Power and DMX In/Out connector
- Convection cooling system without fans

#### POWER SUPPLY

- Input Voltage: AC~100-240V, 50/60 Hz
- Switching power supply unit
- IP65 Power and DMX In/Out connector

#### WEIGHT AND DIMENSIONS

- Net weight: 1,9 kg (bar)
- Dimensions: 395x55x85 mm (bar)

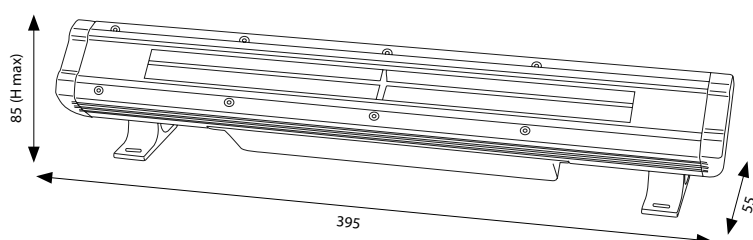






## ARCHITECTURAL LEDS

# IP LED BAR 8 BATTERY



NEW

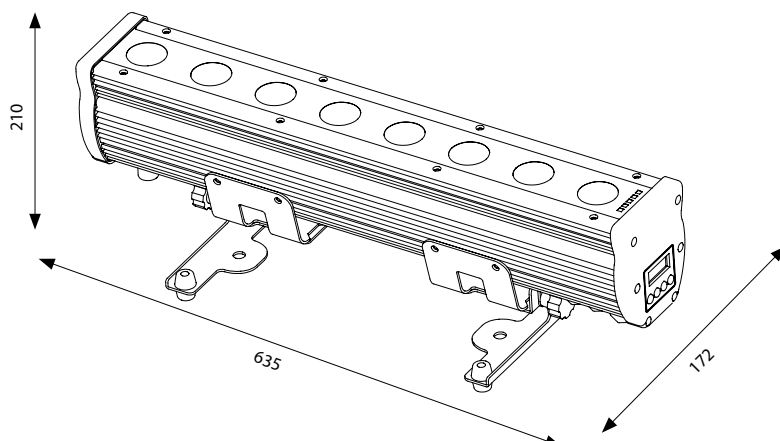

### SG IP LED BAR 8 BAT - PRODUCT CODE

SG CASE IP LED BAR BAT - CASE WITH CHARGE SYSTEM (4X SG IP LED BAR 8 BAT)

### LIGHT SOURCE

- 8x10W led RGBW Full Color
- LED lifespan: >50,000h
- LED refresh frequency: >400Hz anti-flicker

### OPTIC SYSTEM

- Beam angle: 10° x 40°
- Luminous flux: 600 lux @5mt (full on)

### COLOR SYSTEM

- LED source 4 in 1 RGBW Full Color
- Infinite chromatic possibilities and colour temperature control

### EFFECTS

- Linear Dimmer 0-100%
- Electronic strobe: 1-20 flashes/s with adjustable speed
- Color macros selectable by DMX
- Single pixel control

### CONTROL AND PROGRAMMING

- 5 DMX configurations available: 1/4/9/32/36 channels
- USITT DMX 512 protocol
- Built-in DMX wireless receiver by Wireless Solutions
- Master / Slave mode with cable
- Static color mode with strobe adjustment
- Automatic mode with 13 different programs selectable from the display with speed adjustment
- Color mode with 51 different pre-programmed color macros
- IR remote controller included with possibility to select colors or macros (Included)
- Work power function for energy saving (eco mode)

### STRUCTURE AND CABINET


- Die cast aluminium housing, black color
- Blue LCD graphic display
- Front tempered glass
- "Light up" positioning with adjustable angle
- IP65DMX 3-poles XLR In/Out connectors
- IP rating: IP65
- Convection cooling system without fans

### POWER SUPPLY

- Input Voltage: AC~100-240V, 50/60 Hz, for normal working and battery recharge
- Switching power supply unit
- Internal rechargeable battery: 12VDC
- Capacity: 2x12 Ah
- Runtime battery: ~ 5 h (full ON)
- Max power: 80W @ 230VAC
- Charging cycle: ~ 8 h (Projector off)
- IP65 True ONE input power connection

### WEIGHT AND DIMENSIONS

- Net weight: 9.3 kg
- Dimensions: 635x172x210 mm

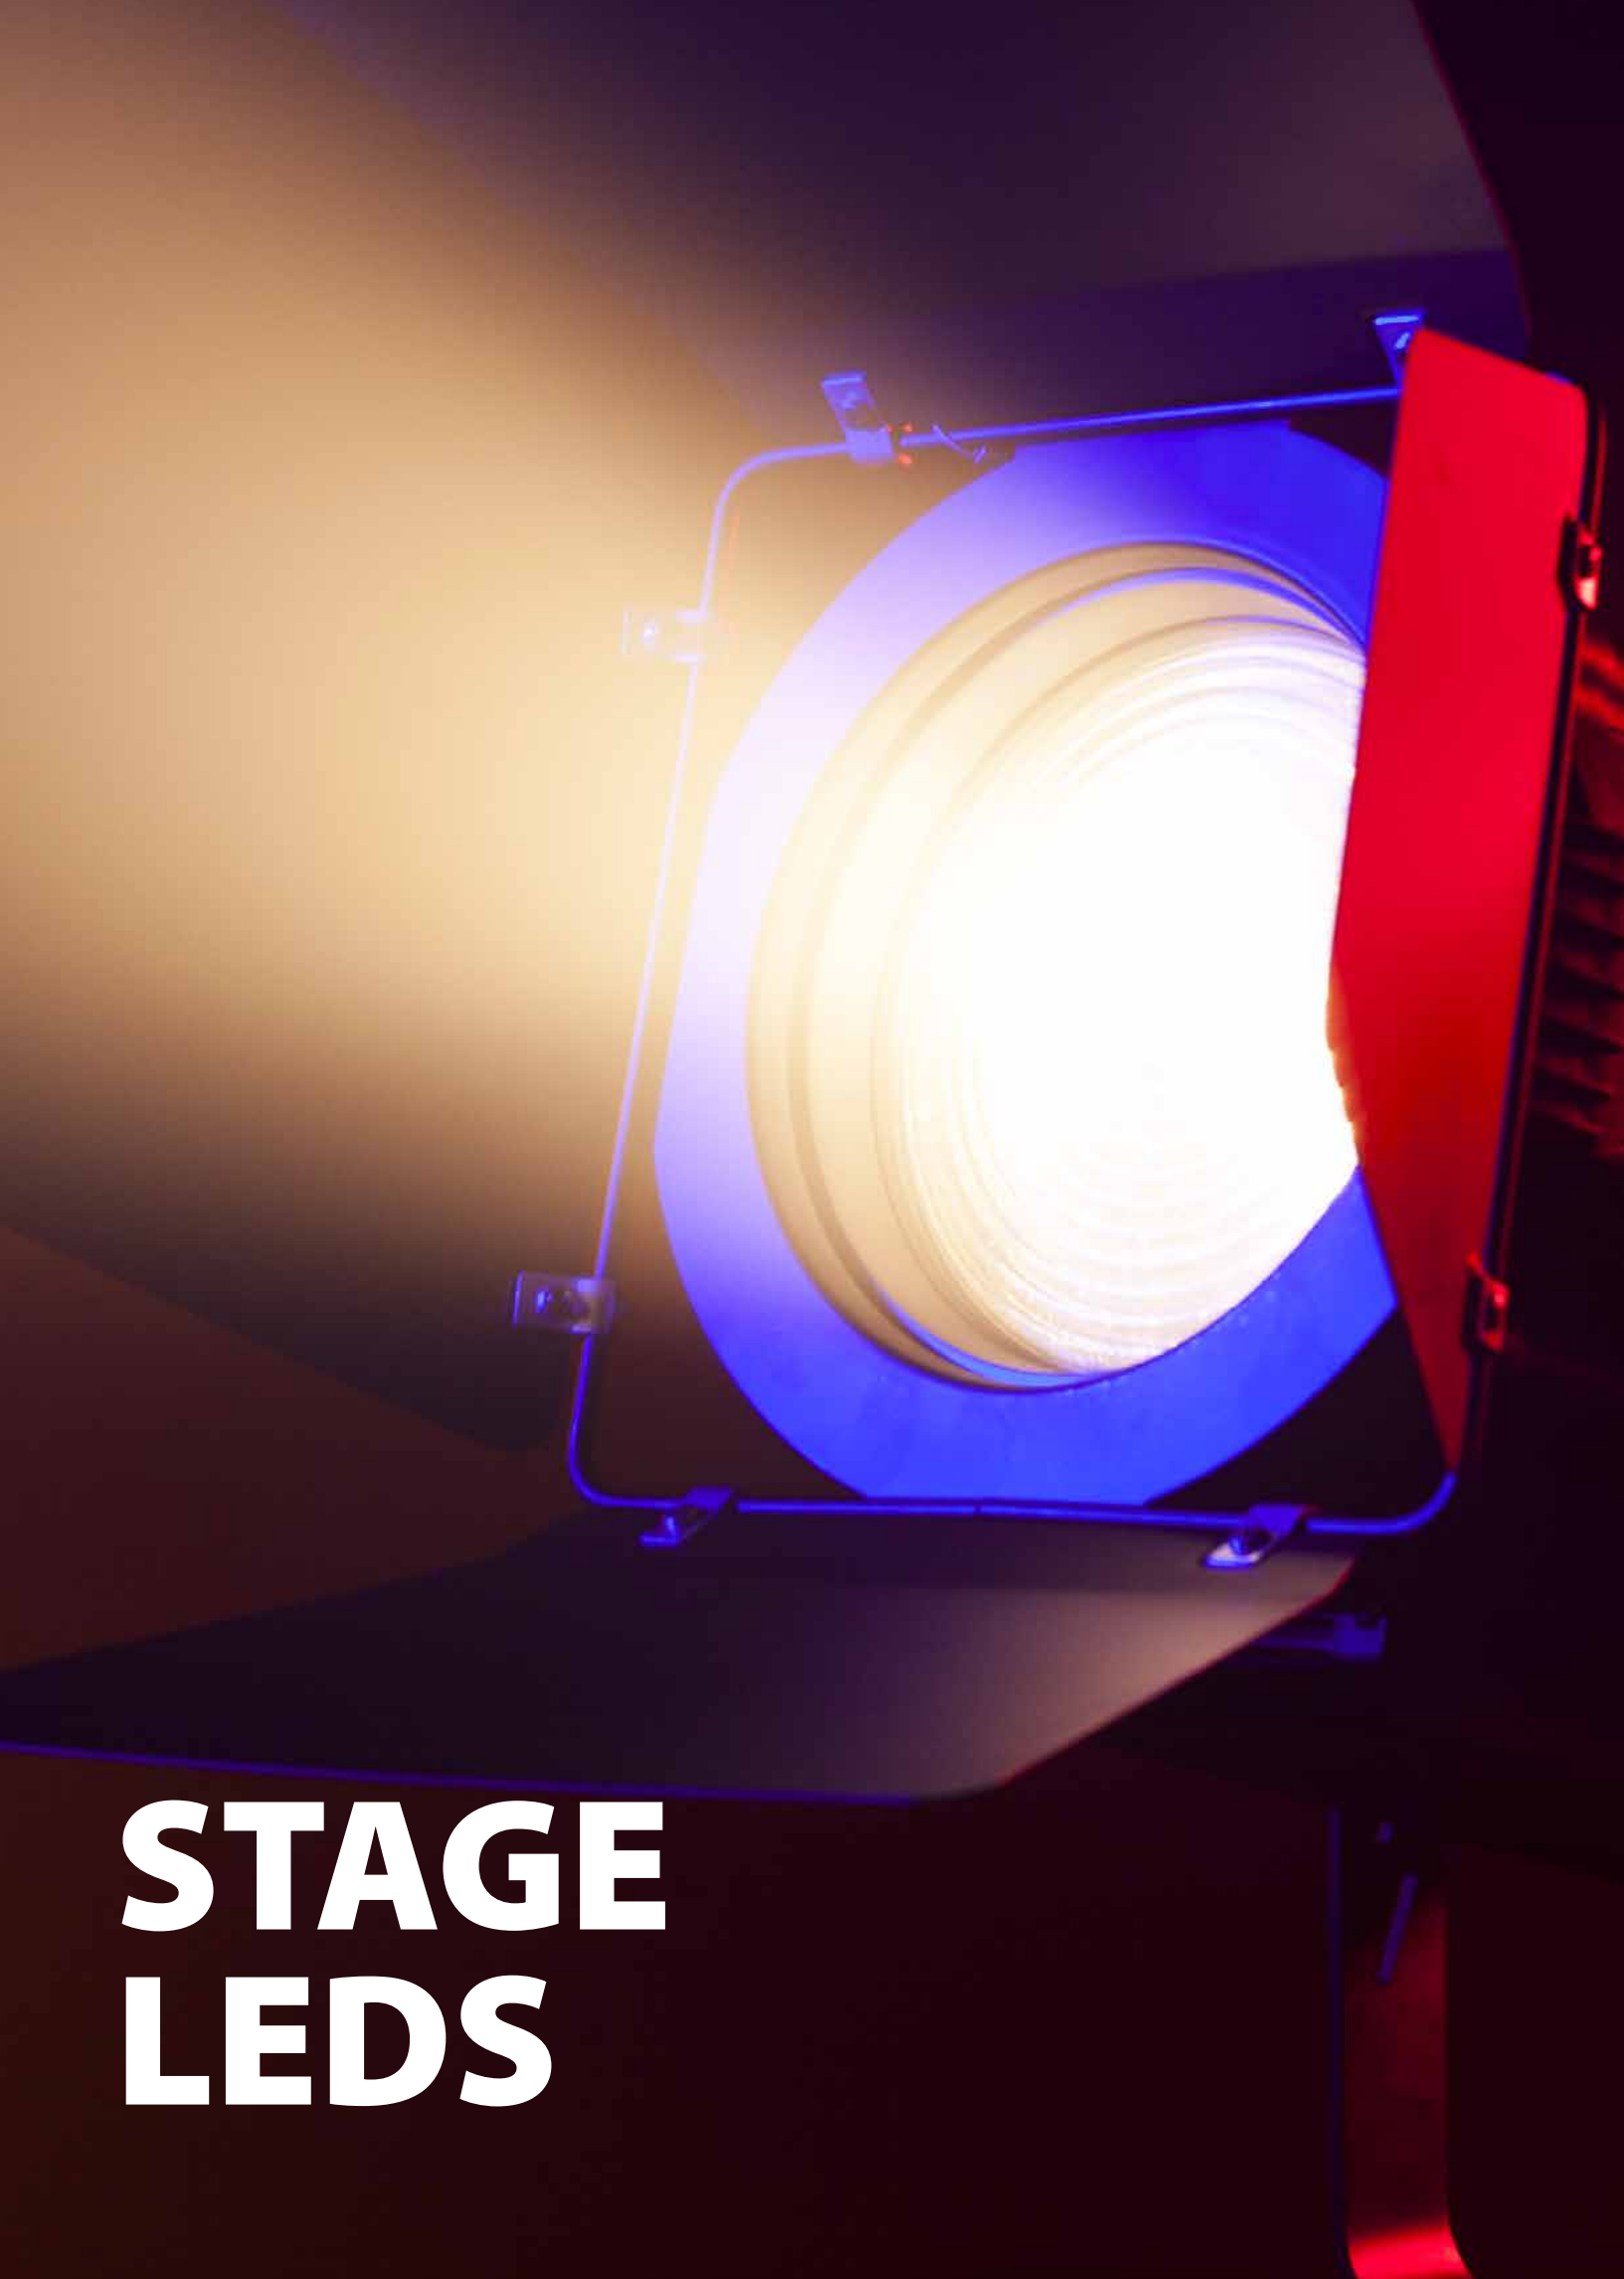

**STAGE  
LEDs**





STAGE LEDS

# SAGOLED 300



**SG SAGOLEDWW300** - PRODUCT CODE Warm White VERSION  
**SG SAGOLEDWCW300** - PRODUCT CODE Cold White VERSION  
**SG CASESAGOLED300** - CASE (4x SG SAGOLED300)

## LIGHT SOURCE

- 1x300W Led Warm White 3200K
- CRI \90Ra
- LED lifespan: >50,000h
- LED refresh frequency: >400Hz flicker free

## OPTIC SYSTEM

- Beam angle: 26° (included)
- Optional: 19° - 36° - 50°
- Luminous flux: 6150 lux @5mt (19°)

## COLOR SYSTEM

- Warm White 3200K COB LED Source

## EFFECTS

- Linear dimmer 0-100%
- Electronic strobe: 1-20 flashes/s with adjustable speed

## CONTROL AND PROGRAMMING

- 2 DMX channels configuration: 1/2 channels
- USITT DMX 512 protocol

## STRUCTURE AND CABINET


- High resistance black Alluminium housing
- Blue LCD graphic display
- Mounting points: single bracket for suspension
- Gel filter frame included
- Gobo holder included
- Iris (sold separately)
- DMX 3-poles XLR In/Out connectors
- IP rating: IP20
- Forced Air fan cooling system with "Low Noise" electronic control

## POWER SUPPLY

- Input Voltage: AC~100-240V 50/60Hz
- Switching power supply unit
- Max power: 350W @ 230VAC
- In/Out connection with Powercon sockets
- Power supply cable included

## WEIGHT AND DIMENSIONS

- Net weight: 10,5kg
- Dimensions: 690x360x465 mm

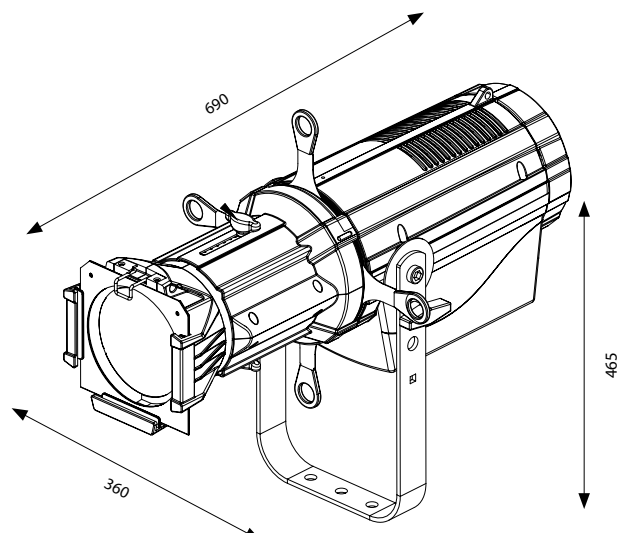

# STAGE LEDS

## SAGOLED 120



**SG SAGOLEDWW** - PRODUCT CODE Warm White VERSION  
**SG SAGOLEDW** - PRODUCT CODE Cold WHITE VERSION  
**SG CASESAGOLED** - CASE (4x SG SAGOLEDWW)

### LIGHT SOURCE

- 1x120W Led Warm White 3200K
- LED lifespan: >50.000h
- LED refresh frequency: >400Hz flicker free

### OPTIC SYSTEM

- Beam angle: 19° (included)
- Optional: 26° - 36° - 50°
- Luminous flux: 2950 lux @5mt (19°)

### COLOR SYSTEM

- Warm White 3200K LED Source

### EFFECTS

- Linear dimmer 0-100%
- Electronic strobe: 1-20 flashes/s with adjustable speed

### CONTROL AND PROGRAMMING

- 1 DMX channels configuration: 2 channels
- USITT DMX 512 protocol
- Master / Slave mode
- Auto mode: 2 programs can be selected from display

### STRUCTURE AND CABINET


- Metal housing and high resistance plastic covers, black color
- Red LED display
- Mounting points: single bracket
- Gel filter frame included
- Gobo holder included
- Iris (sold separately)
- DMX 3-poles XLR In/Out connectors
- IP rating: IP20
- Forced Air fan cooling system with "Low Noise" electronic control

### POWER SUPPLY

- Input Voltage: AC~100-240V 50/60Hz
- Switching power supply unit
- Max power: 150W @ 230VAC
- Power supply cable 1,5 mt

### WEIGHT AND DIMENSIONS

- Net weight: 4,8 kg
- Dimensions: 643x360x465 mm

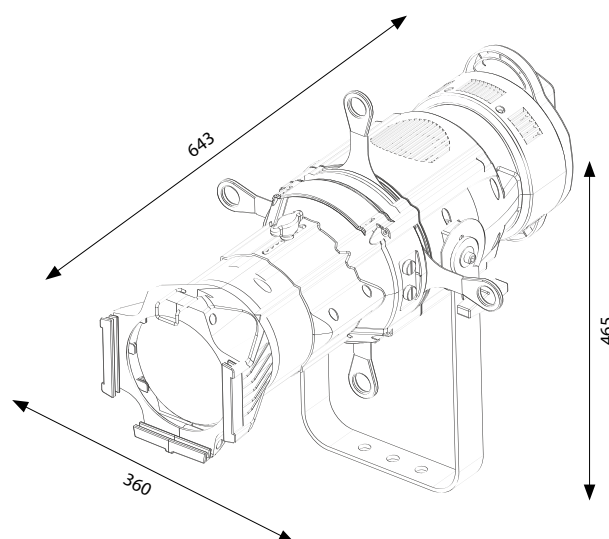



# MINI SAGOLED 60



**SG SAGOLEDWWM** - PRODUCT CODE Warm White VERSION  
**SG SAGOLEDWWM** - PRODUCT CODE Cold WHITE VERSION  
**SG CASESAGOLEDM** - CASE (4x SG SAGOLEDWWM)

## LIGHT SOURCE

- 1x60W Led Warm White 3200K
- LED lifespan: > 50.000h
- LED refresh frequency: > 400Hz flicker-free

## OPTIC SYSTEM

- Beam Angle: 19° (included)
- Optional: 26° - 36° - 50°

## COLOR SYSTEM

- Warm White 3200K LED Source

## EFFECTS

- Linear dimmer 0-100%
- Electronic Strobe: 1-20 flashes/s with adjustable speed

## CONTROL AND PROGRAMMING

- 1 DMX configurations available: 2 channels
- USITT DMX 512 protocol
- Master/Slave mode
- Auto mode: 2 programs can be selected from display

## STRUCTURE AND CABINET


- Metal housing and high resistance plastic covers, black color
- Red LED display
- Mounting points: single bracket
- Gel filter frame included
- Gobo holder included
- Iris not included (sold separately)
- DMX 3-poles XLR In/Out connection with external USB box
- IP rating: IP20
- Forced Air fan cooling system with "Low Noise" electronic control

## POWER SUPPLY

- Input Voltage: AC~100-240V, 50/60 Hz
- Switching power supply unit
- Max power: 70W @ 230VAC
- Power supply cable 1mt included
- Max 4 pcs linkable @ 240VAC

## WEIGHT AND DIMENSIONS

- Net weight: 2,2 kg
- Dimensions: 158x305x238 mm

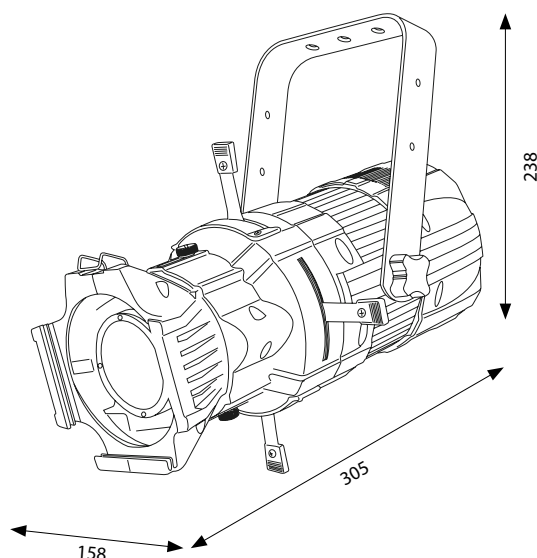

# STAGE LEDS

## JUNIOR PROFILE



NEW



**SG JNRPROWW** - PRODUCT CODE Warm White VERSION  
**SG JNRPROCW** - PRODUCT CODE Cold WHITE VERSION  
**SG JNRPRORGBW** - PRODUCT CODE RGBW VERSION  
**SG CASEJNRPRO** - CASE (6X SG JNRPROWW)

### LIGHT SOURCE

- 1x30W Led Warm White 3200K
- LED lifespan: > 50.000h
- LED refresh frequency: > 400Hz anti-flicker

### OPTIC SYSTEM

- Beam Angle: 19° (included)
- Optional: 14° - 26° - 36°
- Luminous flux: 215 lux @5m (full on)

### COLOR SYSTEM

- Warm White 3200K LED source

### EFFECTS

- Linear dimmer 0-100%
- Electronic Strobe: 1-20 flashes/s with adjustable speed

### CONTROL AND PROGRAMMING

- 1 DMX channels configuration: 2 channels
- USITT DMX 512 protocol
- Auto mode: 1 programs can be selected from dip switch

### STRUCTURE AND CABINET


- High resistance black plastic and aluminium housing
- Mounting points: single bracket
- Gel filter frame included
- Gobo holder included
- Iris not included (sold separately)
- DMX 3-poles XLR In/Out connectors
- IP rating: IP20

### POWER SUPPLY

- Input Voltage: AC~100-240V, 50/60 Hz
- Max power: 35W @ 230VAC
- Power supply cable 1mt included

### WEIGHT AND DIMENSIONS

- Net weight: 1,1 kg
- Dimensions: 160x265x205 mm

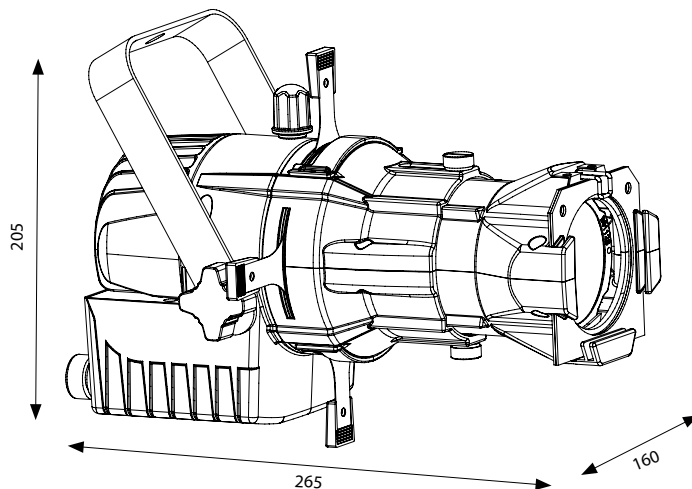



# HALO FRESNEL LED 200



**SG HALOFWW** - PRODUCT CODE Warm White VERSION  
**SG HALOFCW** - PRODUCT CODE Cold WHITE VERSION  
**SG CASEHALOFR** - CASE (4x SG HALOFWW)

## LIGHT SOURCE

- 1X200W led COB Warm White 3200K
- CRI  $\geq 85$ Ra
- LED lifespan: >50.000h
- LED refresh frequency: >400Hz flicker-free

## OPTIC SYSTEM

- Beam angle: zoom from 15° to 55°
- Luminous flux: 2500 lux @5mt (15°)
- Luminous flux: 1390 lux @5mt (55°)

## COLOR SYSTEM

- Warm White 3200K COB LED Source

## EFFECTS

- Linear dimmer 0-100%
- Electronic Strobe: 1-20 flashes/s with adjustable speed

## CONTROL AND PROGRAMMING

- 2 different DMX channels configurations: 2/3 channels
- USITT DMX 512 protocol
- Manual mode for dimmer and zoom adjustment
- Direct manual control for zoom on the rear panel

## STRUCTURE AND CABINET


- Black aluminum housing
- Blue LCD graphic display
- Mounting points: single bracket for suspension
- Rotating barn door with "safety cable" (included)
- Single handle in the rear side for easy transportation
- DMX 3/5-poles XLR In/Out connectors
- IP rating: IP20
- Forced Air fan cooling system with "Low Noise" electronic control

## POWER SUPPLY

- Input Voltage: AC~100-240V 50/60Hz
- Switching power supply unit
- Max power: 250W @ 230VAC
- In/Out connection with Powercon sockets
- Power supply cable 1,5 mt included
- Max 4 pcs linkable @ 240VAC

## WEIGHT AND DIMENSIONS

- Net Weight: 8,4 kg
- Dimensions: 260x450x310 mm

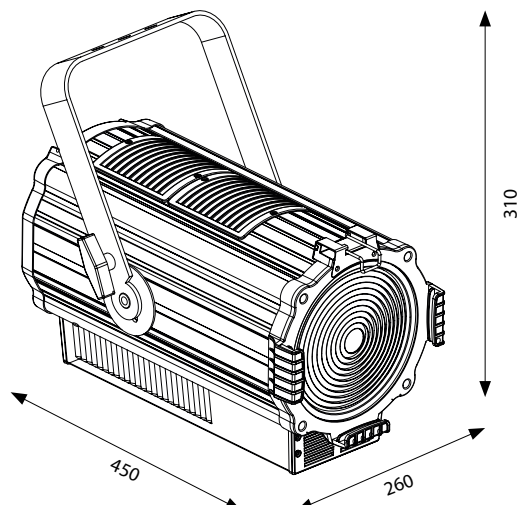



# HALO FRESNEL LED 100



**SG HALOFWWM** - PRODUCT CODE Warm White VERSION  
**SG HALOFCWM** - PRODUCT CODE Cold White VERSION  
**SG CASEHALOFR** - CASE (4x SG HALOFWWM)

## LIGHT SOURCE

- 1x100W Led COB Warm White 3200K
- CRI ≥ 85Ra
- LED lifespan: > 50.000h
- LED refresh frequency: > 400Hz flicker-free

## OPTIC SYSTEM

- Beam Angle: manual zoom from 15° to 55°
- Luminous flux: 1683lux @ 5mt (15°)
- Luminous flux: 886lux @ 5mt (55°)

## COLOR SYSTEM

- Warm White 3200K COB LED Source

## EFFECTS

- Linear dimmer 0-100%
- Electronic Strobe: 1-20 flashes/s with adjustable speed

## CONTROL AND PROGRAMMING

- 2 DMX configurations available: 1/2 channels
- USITT DMX 512 protocol
- Manual dimmer mode

## STRUCTURE AND CABINET


- Aluminium housing, black color
- Blue LCD graphic display
- Mounting points: single bracket
- Rotating barndoor with "safety cable" included
- Single handle in the rear side for easy transportation
- DMX 3/5-poles XLR In/Out connection
- IP rating: IP20
- Forced Air fan cooling system with "Low Noise" electronic control

## POWER SUPPLY

- Input Voltage: AC~100-240V, 50/60 Hz
- Switching power supply unit
- Max power: 150W @ 230VAC
- In/Out connection with PowerCON sockets
- Power supply cable 1mt included
- Max 8 pcs linkable @ 240VAC

## WEIGHT AND DIMENSIONS

- Net weight: 7 kg
- Dimensions: 260x330x310 mm (without barndoor)

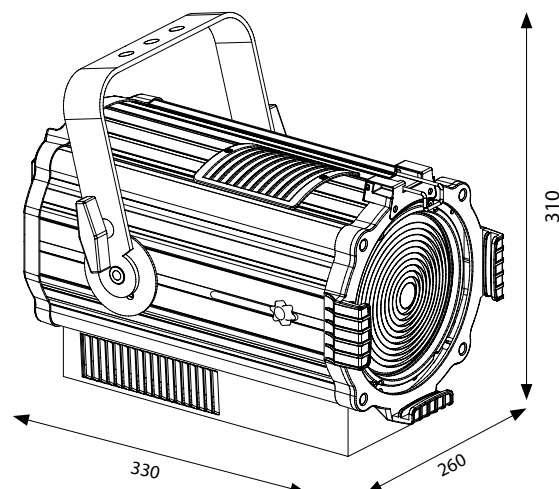



# HALO FRESNEL LED 60



**SG HALOFWWM60** - PRODUCT CODE Warm White VERSION  
**SG HALOFCWM60** - PRODUCT CODE Cold White VERSION  
**SG CASEHALOFM** - CASE (4X SG HALOFWWM60)

## LIGHT SOURCE

- 1x60W Led COB Warm White 3200K
- CRI  $\geq$  85Ra
- LED lifespan: > 50.000h
- LED refresh frequency: > 400Hz flicker-free

## OPTIC SYSTEM

- Beam Angle: manual zoom from 15° to 55°
- Luminous flux: 1490lux @ 5mt (15°)
- Luminous flux: 530lux @ 5mt (55°)

## COLOR SYSTEM

- Warm White 3200K COB LED Source

## EFFECTS

- Linear dimmer 0-100%
- Electronic Strobe: 1-20 flashes/s with adjustable speed

## CONTROL AND PROGRAMMING

- 1 DMX configurations available: 2 channels
- USITT DMX 512 protocol
- Manual dimmer mode

## STRUCTURE AND CABINET


- High resistance plastic housing, black color
- Red LED display
- Mounting points: single bracket
- Rotating barndoor with "safety cable" included
- DMX 3-poles XLR In/Out connection with external USB box
- IP rating: IP20
- Forced Air fan cooling system with "Low Noise" electronic control

## POWER SUPPLY

- Input Voltage: AC~100-240V, 50/60 Hz
- Switching power supply unit
- Max power: 70W @ 230VAC
- Power supply cable 1mt included
- Max 4 pcs linkable @ 240VAC

## WEIGHT AND DIMENSIONS

- Net weight: 2 kg
- Dimensions: 165x260x230 mm (without barndoor)

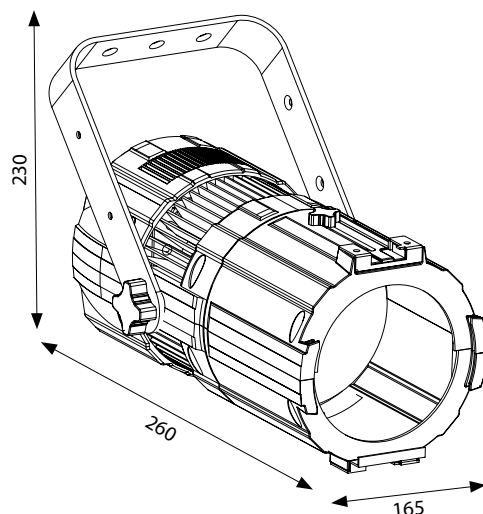

# HALO PROFILE LED ZOOM 200 15-28



**SG HALOPWW1528** - PRODUCT CODE Warm White VERSION  
**SG HALOPCW1528** - PRODUCT CODE Cold White VERSION  
**SG CASEHALOPR** - CASE (4X SG HALOPWW1528)

## LIGHT SOURCE

- 1X200W led COB Warm White 3200K
- CRI  $\geq 85$ Ra
- LED lifespan: >50.000h
- LED refresh frequency: >400Hz flicker-free

## OPTIC SYSTEM

- Beam angle: zoom from 15° to 28°
- Luminous flux: 4090lux @5mt (15°)
- Luminous flux: 1800lux @5mt (28°)

## COLOR SYSTEM

- Warm White 3200K COB LED Source

## EFFECTS

- Linear dimmer 0-100%
- Electronic Strobe: 1-20 flashes/s with adjustable speed

## CONTROL AND PROGRAMMING

- 2 different DMX channels configurations: 1/2 channels
- USITT DMX 512 protocol

## STRUCTURE AND CABINET


- Black aluminum housing
- Blue LCD graphic display
- Mounting points: single bracket
- Single handle in the rear side for easy transportation
- Gel filter frame included
- Gobo holder included
- Iris (sold separately)
- DMX 3/5-poles XLR In/Out connection
- IP rating: IP20
- Forced Air fan cooling system with "Low Noise" electronic control

## POWER SUPPLY

- Input Voltage: AC~100-240V 50/60Hz
- Switching power supply unit
- Max power: 250W @ 230VAC
- In/Out connection with PowerCON sockets
- Power supply cable 1,5 mt included
- Max 4 pcs linkable @ 240VAC

## WEIGHT AND DIMENSIONS

- Net Weight: 10kg
- Dimensions: 275x745x410 mm

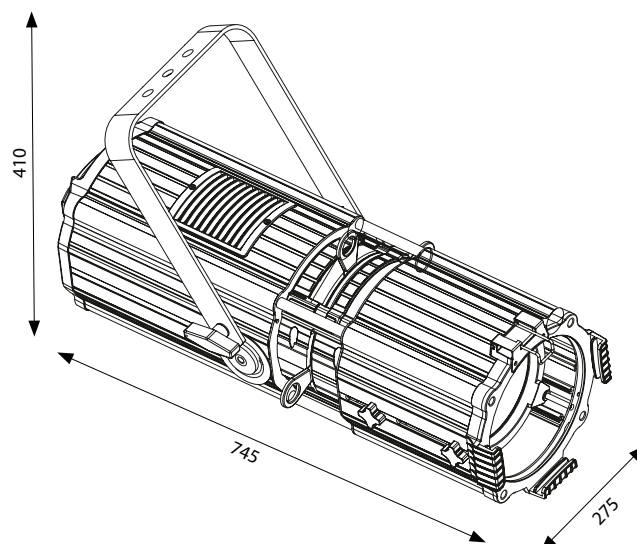





# HALO PROFILE LED ZOOM 200 20-45

**SG HALOPWW2045** - PRODUCT CODE Warm White VERSION  
**SG HALOPCW2045** - PRODUCT CODE Cold White VERSION  
**SG CASEHALOPR** - CASE (4X SG HALOPWW2045)



## LIGHT SOURCE

- 1X200W LED COB Warm White 3200K
- CR  $\geq 85$ Ra
- LED lifespan > 50.000h
- LED refresh frequency: > 400Hz flicker free

## OPTIC SYSTEM

- Beam angle: zoom from 20° to 45°
- Luminous flux: 2950lux@5mt (20°)
- Luminous flux: 1550lux@5mt (45°)

## COLOR SYSTEM

- Warm White 3200K COB LED Source

## EFFECTS

- Linear dimmer 0 - 100%
- Electronic Strobe: 1-20 flashes/s with adjustable speed

## CONTROL AND PROGRAMMING

- 2 different DMX channels configurations: 1/2 channels
- USITT DMX 512 protocol

## STRUCTURE AND CABINET


- Black aluminium housing
- Blue LCD graphic display
- Mounting points: single bracket
- Single handle in the rear side of the for easy transportation
- Gel filter frame included
- Gobo holder included
- Iris (sold separately)
- DMX 3/5-poles XLR In/Out connection
- IP rating: IP20
- Forced Air fan cooling system with "Low Noise" electronic control

## POWER SUPPLY

- Input voltage: AC~100-240V 50/60Hz
- Switching power supply unit
- Max power: 250W @ 230VAC
- In/Out connection with PowerCON sockets
- Power supply cable 1,5 mt included
- Max 4 pcs linkable @ 240VAC

## WEIGHT AND DIMENSIONS

- Net Weight: 10kg
- Dimension: 275x645x410 mm

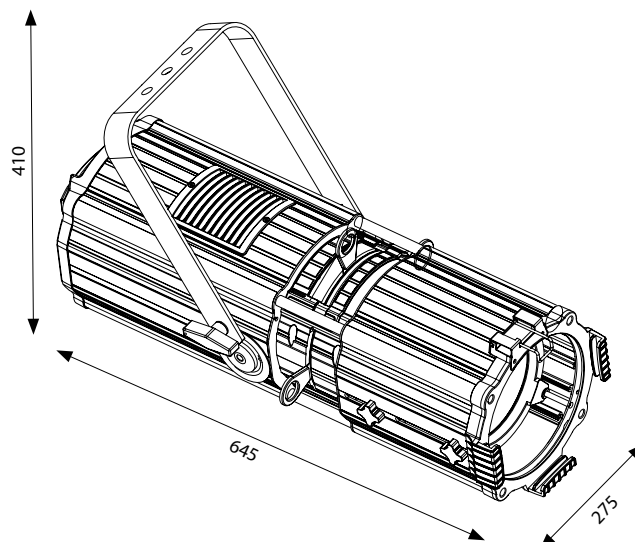

# HALO PROFILE LED ZOOM 60



NEW



**SG HALOPWWM60** - PRODUCT CODE Warm White VERSION  
**SG HALOPCWM60** - PRODUCT CODE Cold White VERSION  
**SG CASEHALOPM** - CASE (4X SG HALOPWWM60)

## LIGHT SOURCE

- 1X60W LED COB Warm White 3200K
- CRI≥85Ra
- LED lifespan > 50,000h
- LED refresh frequency: > 400Hz anti-flicker

## OPTIC SYSTEM

- Beam angle: zoom from 19° to 36°
- Luminous flux: 890lux@5mt (19°)
- Luminous flux: 280lux@5mt (36°)

## COLOR SYSTEM

- Warm White 3200K COB LED Source

## EFFECTS

- Linear dimmer 0 - 100%
- Electronic Strobe: 1-20 flashes/s with adjustable speed

## CONTROL AND PROGRAMMING

- 1 different DMX channels configuration: 2 channels
- USITT DMX 512 protocol

## STRUCTURE AND CABINET


- Black aluminium housing
- Mounting points: single bracket
- External box for address, function settings and manual control of Dimmer
- DMX 3-poles XLR In/Out connection with external USB box
- IP rating: IP20
- Forced Air fan cooling system with "Low Noise" electronic control

## POWER SUPPLY

- Input voltage: AC~100-240V 50/60Hz
- Switching power supply unit
- Max power: 65W @ 230VAC
- Max 4 pcs linkable @ 240VAC

## WEIGHT AND DIMENSIONS

- Net Weight: 3.5 kg
- Dimension: 180x440x300 mm

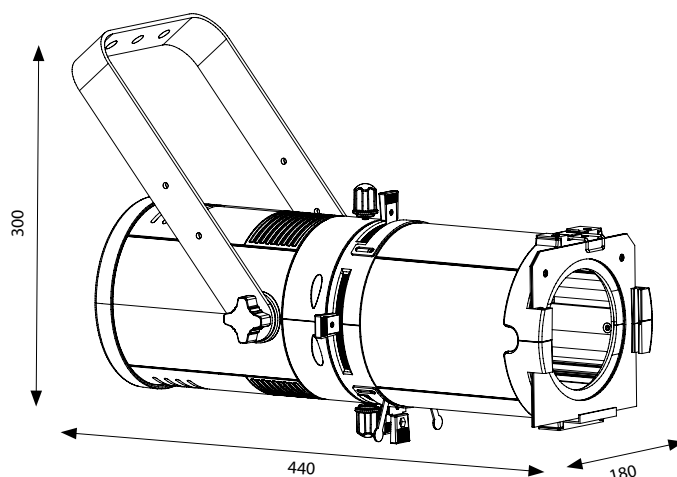

# STUDIO LED PANEL RGB



**SG STUDIOPRGB** - PRODUCT CODE  
**SG CASESTUDIOP** - CASE (4x SG STUDIOP)

## LIGHT SOURCE

- 1456 RGB leds
- LED lifespan: >50.000h
- LED refresh frequency: >400Hz flicker-free

## OPTIC SYSTEM

- Beam angle: 110°

## COLOR SYSTEM

- RGB led color mixing

## EFFECTS

- Linear Dimmer 0-100%
- Adjustable Strobe

## CONTROL AND PROGRAMMING

- 1 DMX configuration available: 6 channels
- USITT DMX 512 protocol
- Master/Slave mode

## STRUCTURE AND CABINET


- Die cast aluminum housing
- Blue LCD graphic display
- DMX 3/5-poles XLR In/Out connectors
- Convection cooling system without fans
- Barn door included

## POWER SUPPLY


- Input Voltage: AC~100-240V, 50/60 Hz
- Switching power supply unit
- Max power: 250W @ 230VAC
- In/Out connection with PowerCON sockets
- Power supply cable included

## WEIGHT AND DIMENSIONS

- Net weight: 11,5 kg
- Dimensions: 490x150x275 mm

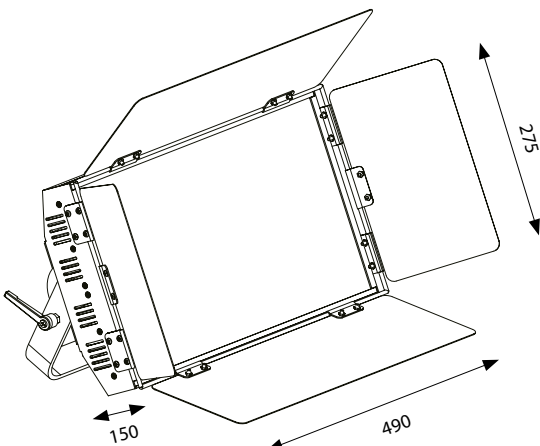

# STUDIO LED PANEL WHITE

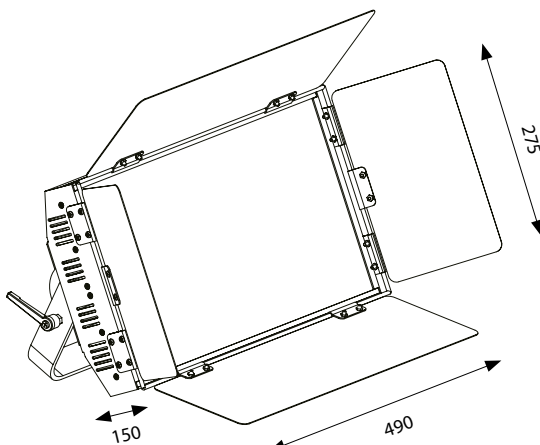

**SG STUDIOPWW** - PRODUCT CODE Warm White VERSION  
**SG STUDIOPCW** - PRODUCT CODE Cold White VERSION  
**SG CASESTUDIOP** - CASE (4x SG STUDIOP)

## LIGHT SOURCE

- 1456 Warm White 3200K leds
- CRI  $\geq$  90 Ra
- LED lifespan: >50,000h
- LED refresh frequency: >400Hz flicker-free

## OPTIC SYSTEM

- Beam angle: 110°

## EFFECTS

- Linear Dimmer 0-100%
- Adjustable Strobe

## CONTROL AND PROGRAMMING

- 2 DMX configuration available: 1/2 channels
- USITT DMX 512 protocol
- Master/Slave mode

## STRUCTURE AND CABINET

- Die cast aluminum housing
- Blue LCD graphic display
- DMX 3/5-poles XLR In/Out connectors
- Convection cooling system without fans
- Barn door included

## POWER SUPPLY


- Input Voltage: AC~100-240V, 50/60 Hz
- Switching power supply unit
- Max power: 250W @ 230VAC
- In/Out connection with PowerCON sockets
- Power supply cable included

## WEIGHT AND DIMENSIONS

- Net weight: 11,5 kg
- Dimensions: 490x150x275 mm



NEW

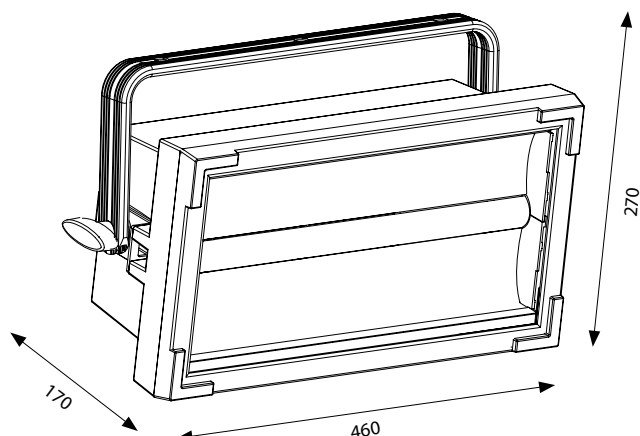

**SG BLAZER1500S - PRODUCT CODE**  
**SG CASEBLAZERS - CASE (4X SG BLAZER1500S)**

**LIGHT SOURCE**

- 228 White led 6500K
- LED lifespan: > 50.000h
- LED refresh frequency: > 400Hz flicker-free

**OPTIC SYSTEM**

- Beam Angle: 90x140°

**EFFECTS**

- Linear dimmer 0-100%
- Adjustable strobe effect
- Random strobe effect
- Sectors control

**CONTROL AND PROGRAMMING**

- Dynamic patterns with direction and speed control
- 4 DMX configurations available: 3/4/14 channels
- USITT DMX 512 protocol

**STRUCTURE AND CABINET**

- Metal housing and high resistance plastic covers, black color
- LCD Graphic display
- Mounting points: single adjustable bracket
- DMX 3-poles XLR In/Out connections
- Controlled forced air fan cooling system

**POWER SUPPLY**

- Input Voltage: AC~100-240V, 50/60 Hz
- Switching power supply unit
- Max power: 2000W @ 230VAC
- In/Out connection with PowerCON sockets
- Power supply cable included

**WEIGHT AND DIMENSIONS**

- Net weight: 6,5 kg
- Dimensions: 460x170x270 mm

# STAGE LEDS

## BLOK 2TW



NEW



**SG BLOK2TW** - PRODUCT CODE  
**SG CASEBLOK2** - CASE (4X SG BLOK2TW)  
**SG BLOK2TWH** - HARDWARE CONNECTION SYSTEM

### LIGHT SOURCE

- 2x100W led COB Warm White 3200K
- CRI≥85Ra
- LED lifespan: > 50.000h
- LED refresh frequency: > 400Hz anti-flicker

### OPTIC SYSTEM

- Beam Angle: 94°

### COLOR SYSTEM

- Warm White 3200K COB LED Source

### EFFECTS

- Linear dimmer 0-100%
- Adjustable strobe effect
- RED-Shift effect for Halogen blinder simulation
- Single pixel control

### CONTROL AND PROGRAMMING

- 6 DMX configurations available: 1/4/6/2/6/10 channels
- Key lock password for display lock
- USITT DMX 512 protocol

### STRUCTURE AND CABINET


- Die cast aluminium housing, black color
- Hardware system connection for multiple projectors stack (SG BLOK2TWH sold separately)
- LCD graphic display
- Soft touch buttons
- "Light up" positioning with adjustable angle
- IP rating: IP65
- IP65 DMX 3-poles XLR In/Out connectors
- Forced Air fan cooling system with "Low Noise" electronic control

### POWER SUPPLY


- Input Voltage: AC~100-240V, 50/60 Hz
- Switching power supply unit
- Max Power: 315W @ 230VAC
- IP65 True ONE In/Out connectors

### WEIGHT AND DIMENSIONS

- Net weight: 8,2 kg
- Dimensions: 400x240x230 mm

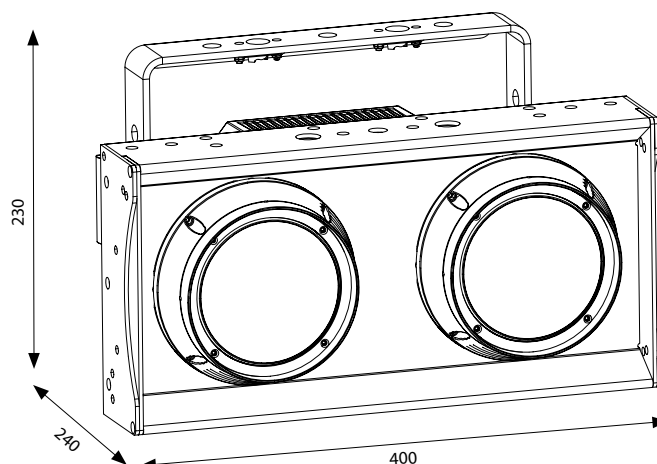



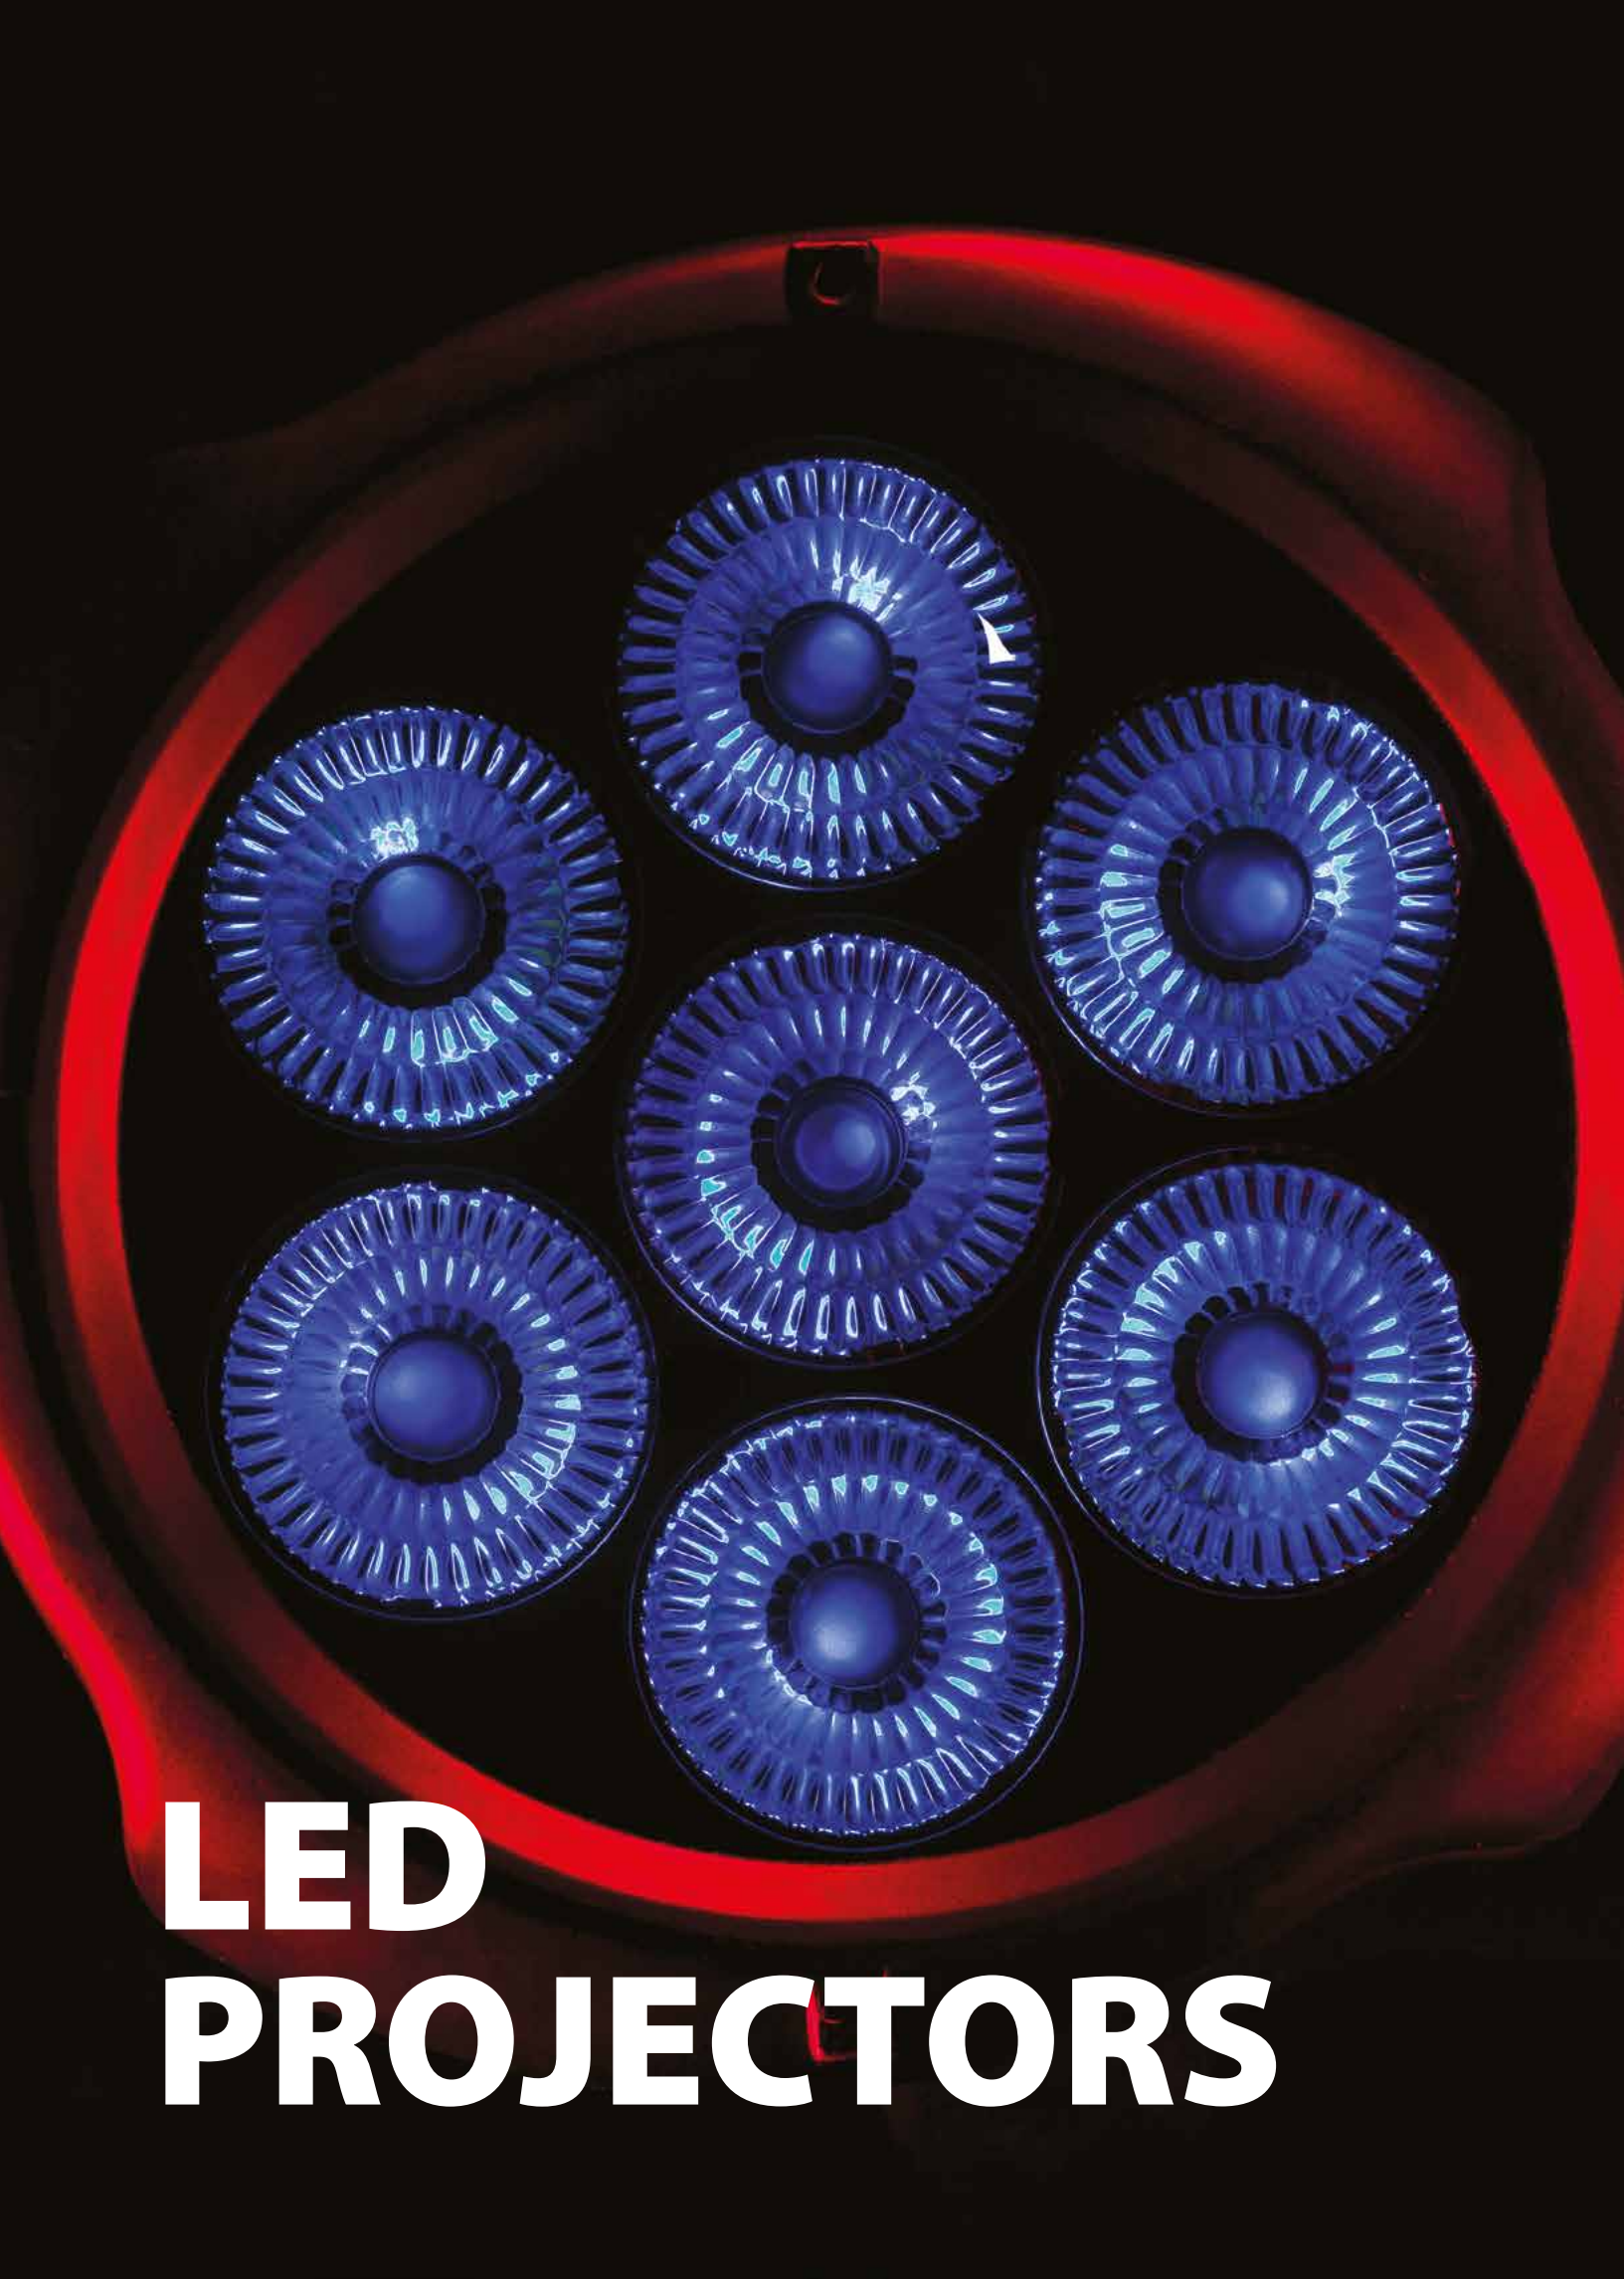

# LED PROJECTORS

# LED PROJECTORS

## AQUPAR 7



### SG AQUPAR7 - PRODUCT CODE

### SG CASEAQUPAR - CASE (6x SG AQUPAR)

#### LIGHT SOURCE

- 7x12W RGBWA-UV led
- LED lifespan: >50,000h
- LED refresh frequency: >400Hz flicker free

#### OPTIC SYSTEM

- Beam angle: 25°

#### COLOR SYSTEM

- RGBWA-UV full color mixing
- Infinite chromatic possibilities and color temperature control

#### EFFECTS

- Linear Dimmer 0-100%
- Electronic strobe: 1-20 flashes/s with adjustable speed
- Color macros selectable via DMX

#### CONTROL AND PROGRAMMING

- 4 DMX configurations available: 3/6/8/13 channels
- Key lock password for display lock
- USITT DMX 512 protocol
- Master / Slave mode
- Automatic mode with 21 different programs selectable from the display with independent adjustment of the speed and strobe
- Color mode with independent adjustment of single color with 70 different selections
- 11 white balance selections
- 4 dimmer curves

#### STRUCTURE AND CABINET


- Die cast aluminum housing, black color
- Color LCD display
- Front tempered glass
- Mounting points: double bracket for suspension or floor mount
- IP rating: IP65
- IP65 DMX 3-poles XLR In/Out connectors
- Convection cooling system without fans

#### POWER SUPPLY

- Input Voltage: AC~100-240V, 50/60 Hz
- Switching power supply unit
- Max power: 85W @ 230VAC
- IP65 True ONE In/Out connectors

#### WEIGHT AND DIMENSIONS

- Net weight: 3,2 kg
- Dimensions: 250x175x230 mm

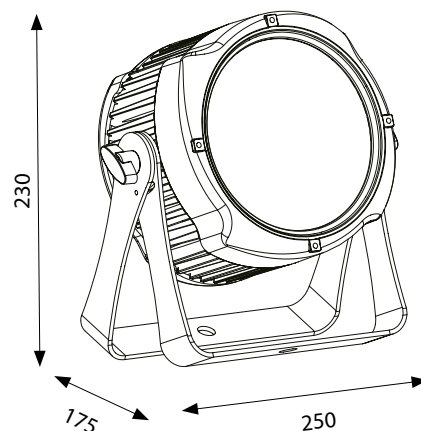



# LED PROJECTORS

## AQUPAR 12



**SG AQUPAR12** - PRODUCT CODE  
**SG CASEAQUPAR** - CASE (6x SG AQUPAR)  
**SG AQUPARBN** - BARNDOOR

### LIGHT SOURCE

- 12x12W RGBWA-UV led
- LED lifespan: >50.000h
- LED refresh frequency: >400Hz flicker free

### OPTIC SYSTEM

- Beam angle: 25°

### COLOR SYSTEM

- RGBWA-UV full color mixing
- Infinite chromatic possibilities and color temperature control

### EFFECTS

- Linear Dimmer 0-100%
- Electronic strobe: 1-20 flashes/s with adjustable speed
- Color macros selectable via DMX

### CONTROL AND PROGRAMMING

- 4 DMX configurations available: 3/6/8/13 channels
- Key lock password for display lock
- USITT DMX 512 protocol
- Master / Slave mode
- Automatic mode with 21 different programs selectable from the display with independent adjustment of the speed and strobe
- Color mode with independent adjustment of single color with 70 different selections
- 11 white balance selections
- 4 dimmer curves

### STRUCTURE AND CABINET


- Die cast aluminum housing, black color
- Color LCD display
- Front tempered glass
- Mounting points: double bracket for suspension or floor mount
- IP rating: IP65
- IP65 DMX 3-poles XLR In/Out connectors
- Convection cooling system without fans

### POWER SUPPLY

- Input Voltage: AC~100-240V, 50/60 Hz
- Switching power supply unit
- Max power: 145W @ 230VAC
- IP65 True ONE In/Out connectors

### WEIGHT AND DIMENSIONS

- Net weight: 4,8 kg
- Dimensions: 300x215x290 mm

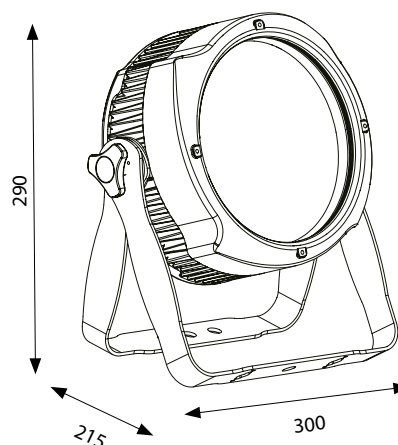

# LED PROJECTORS

## AQUPAR 18



**SG AQUPAR18** - PRODUCT CODE  
**SG CASEAQUPAR** - CASE (6x SG AQUPAR)  
**SG AQUPARBN** - BARNDOOR

### LIGHT SOURCE

- 18x10W RGBW led
- LED lifespan: >50.000h
- LED refresh frequency: >400Hz flicker free

### OPTIC SYSTEM

- Beam angle: 25°

### COLOR SYSTEM

- RGBW full color mixing
- Infinite chromatic possibilities and color temperature control

### EFFECTS

- Linear Dimmer 0-100%
- Electronic strobe: 1-20 flashes/s with adjustable speed
- Color macros selectable via DMX

### CONTROL AND PROGRAMMING

- 4 DMX configurations available: 3/4/6/11 channels
- Key lock password for display lock
- USITT DMX 512 protocol
- Master / Slave mode
- Automatic mode with 21 different programs selectable from the display with independent adjustment of the speed and strobe
- Color mode with independent adjustment of single color with 70 different selections
- 11 white balance selections
- 4 dimmer curves

### STRUCTURE AND CABINET


- Die cast aluminum housing, black color
- Color LCD display
- Front tempered glass
- Mounting points: double bracket for suspension or floor mount
- IP rating: IP65
- IP65 DMX 3-poles XLR In/Out connectors
- Convection cooling system without fans

### POWER SUPPLY

- Input Voltage: AC~100-240V, 50/60 Hz
- Switching power supply unit
- Max power: 185W @ 230VAC
- IP65 True ONE In/Out connectors

### WEIGHT AND DIMENSIONS

- Net weight: 4,8 kg
- Dimensions: 300x215x290 mm

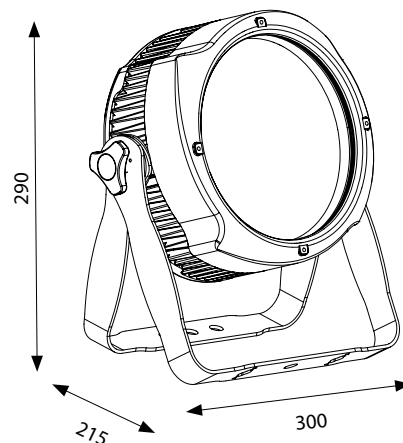



# **COB PROJECTORS**

# COB PROJECTORS

## SOLPAR C60Z



**SG SOLPARC60Z** - PRODUCT CODE  
**SG CASESOLPAR60** - CASE (6x SG SOLPARC60)  
**SG SOLPARC60BN** - BARNDOR

### LIGHT SOURCE

- 1x60W RGBW COB led
- LED lifespan: >50.000h
- LED refresh frequency: >400Hz flicker-free

### OPTIC SYSTEM

- Beam angle: motorized zoom from 15° to 40°

### COLOR SYSTEM

- RGBW full color mixing
- Infinite chromatic possibilities

### EFFECTS

- Linear dimmer 0-100%
- Adjustable strobe
- Color Macros selectable from DMX

### CONTROL AND PROGRAMMING

- 4 DMX configuration available: 3/5/7/9 channels
- Key password for display settings lock
- USITT DMX 512 protocol
- Master/Slave mode
- Macro mode with 63 built-in programs selectable from the display
- Play/Edit User Mode with the possibility to run and edit 20 timed programs
- 5 dimmer curves

### STRUCTURE AND CABINET


- Die cast aluminum housing, black color
- Blue LCD graphic display
- Soft touch buttons
- Tempered front glass
- "Light up" positioning without brackets
- IP rating: IP65
- IP65 DMX 3/5-poles XLR In/Out connectors
- Convection cooling system without fans
- Optional barndoor (code:SG SOLPARC60BN)

### POWER SUPPLY

- Input Voltage: AC~100-240V, 50/60 Hz
- Switching power supply unit
- Max power: 78W @ 230VAC
- IP65 True ONE In/Out power connections
- Power supply cable included

### WEIGHT AND DIMENSIONS

- Net weight: 5,5 kg
- Dimensions: 280x300x280 mm

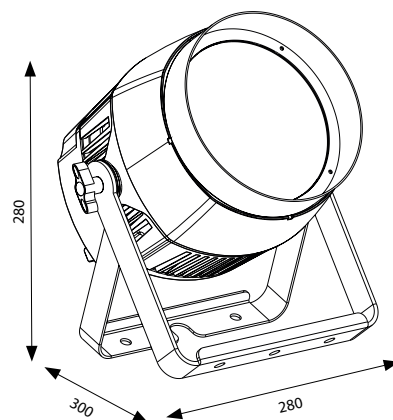



# COB PROJECTORS

## SOLPAR C150Z



**SG SOLPARC150Z** - PRODUCT CODE  
**SG CASESOLPAR150** - CASE (6x SG SOLPARC150)  
**SG SOLPARC150BN** - BARNDOOR

### LIGHT SOURCE

- 1x120W RGBW COB led
- LED lifespan: >50.000h
- LED refresh frequency: >400Hz flicker-free

### OPTIC SYSTEM

- Beam angle: motorized zoom from 15° to 40°

### COLOR SYSTEM

- RGBW full color mixing
- Infinite chromatic possibilities

### EFFECTS

- Linear dimmer 0-100%
- Adjustable strobe
- Color Macros selectable from DMX

### CONTROL AND PROGRAMMING

- 4 DMX configuration available: 3/5/7/9 channels
- Key password for display settings lock
- USITT DMX 512 protocol
- Master/Slave mode
- Macro mode with 63 built-in programs selectable from the display
- Play/Edit User Mode with the possibility to run and edit 20 timed programs
- 5 dimmer curves

### STRUCTURE AND CABINET


- Die cast aluminum housing, black color
- Blue LCD graphic display
- Soft touch buttons
- Tempered front glass
- "Light up" positioning without brackets
- IP rating: IP65
- IP65 DMX 3/5-poles XLR In/Out connectors
- Convection cooling system without fans
- Optional barndoor (code:SG SOLPARC150BN)

### POWER SUPPLY


- Input Voltage: AC~100-240V, 50/60 Hz
- Switching power supply unit
- Max power: 135W @ 230VAC
- IP65 True ONE In/Out power connections
- Power supply cable included

### WEIGHT AND DIMENSIONS

- Net weight: 9,2 kg
- Dimensions: 355x330x330 mm

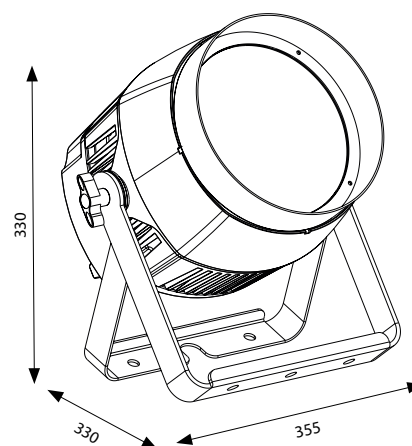



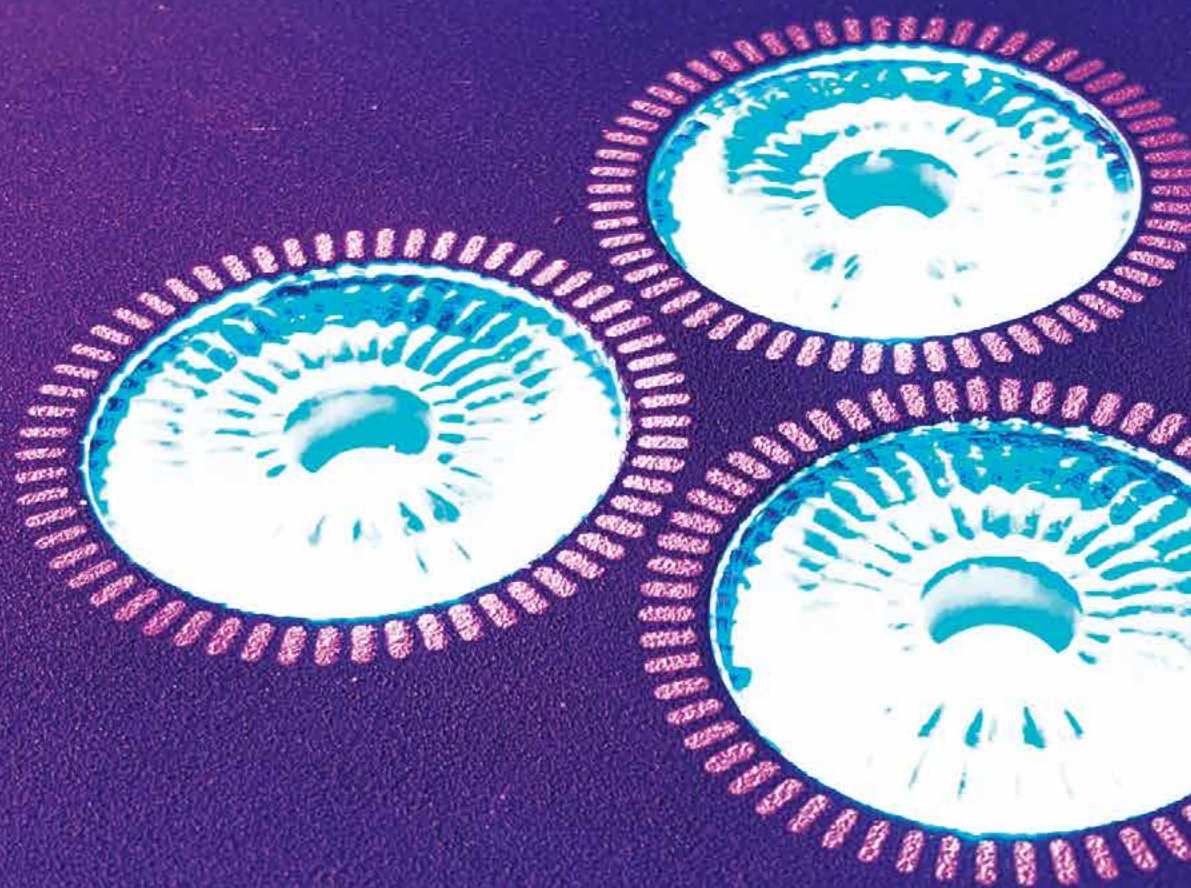

# LED BATTERY PROJECTORS



# LED BATTERY PROJECTORS

## FLOORBAT Q3



**SG FLBATQ3** - PRODUCT CODE  
**SG FLBATCBOX** - CHARGER BOX

### LIGHT SOURCE

- 3x12W led RGBWA - UV full color led
- LED lifespan: > 50.000h
- LED refresh frequency: > 400Hz flicker-free

### OPTIC SYSTEM

- Beam Angle: 15°

### COLOR SYSTEM

- RGBWA-UV full color mixing
- Infinite chromatic possibilities

### EFFECTS

- Linear dimmer 0-100%
- Adjustable strobe effect
- Static color mode: manual adjustment for each color
- Manual color mode: static built-in color macros
- Auto mode: built-in automatic programs with adjustable speed
- Sound mode: sound activation with internal microphone with adjustable sensitivity
- 3 dimmer curves

### CONTROL AND PROGRAMMING

- 3 DMX configurations available: 6/8/12 channels
- USITT DMX 512 protocol
- Built-in DMX wireless transceiver by Wireless Solutions
- Master/Slave mode
- Auto mode
- IR remote controller included with possibility to recall colors or macros

### STRUCTURE AND CABINET


- Metal housing, black color
- OLED display
- Soft touch buttons
- "Light up" positioning with adjustable angle
- IP rating: IP20
- Convection cooling system without fans

### POWER SUPPLY

- Power supply: 12,8Vdc, 1,4A
- Rechargeable internal Lithium battery
- Runtime battery: ~ 4 hrs (full ON)
- Max power: 36W

### WEIGHT AND DIMENSIONS

- Net weight: 1,6 kg
- Dimensions: 145x145x65 mm

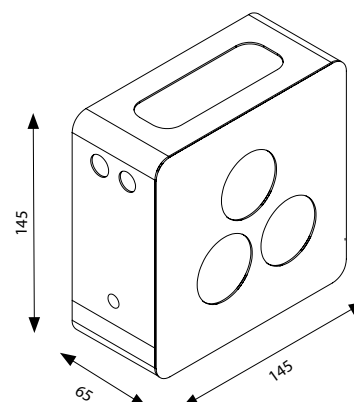

# LED BATTERY PROJECTORS

## FLOORBAT Q1



**SG FLBATQ1** - PRODUCT CODE  
**SG FLBATCHBOX** - CHARGER BOX

### LIGHT SOURCE

- 1x15W RGBW full color led
- LED lifespan: > 50.000h
- LED refresh frequency: > 400Hz flicker-free

### OPTIC SYSTEM

- Beam Angle: 15°

### COLOR SYSTEM

- RGBW full color mixing
- Infinite chromatic possibilities

### EFFECTS

- Linear dimmer 0-100%
- Adjustable strobe effect
- Static color mode: manual adjustment for each color
- Manual color mode: static built-in color macros
- Auto mode: built-in automatic programs with adjustable speed
- Sound mode: sound activation with internal microphone with adjustable sensitivity
- 3 dimmer curves

### CONTROL AND PROGRAMMING

- 3 DMX configurations available: 4/6/11 channels
- USITT DMX 512 protocol
- Built-in DMX wireless transceiver by Wireless Solutions
- Master/Slave mode
- Auto mode
- IR remote controller included with possibility to recall colors or macros

### STRUCTURE AND CABINET


- Metal housing, black color
- OLED display
- Soft touch buttons
- "Light up" positioning with adjustable angle
- IP rating: IP20
- Convection cooling system without fans

### POWER SUPPLY

- Power supply: 12,8Vdc, 1,4A
- Rechargeable internal Lithium battery
- Runtime battery: ~ 5 hrs (full ON)
- Max power: 15W

### WEIGHT AND DIMENSIONS

- Net weight: 1,6 kg
- Dimensions: 145x145x65 mm

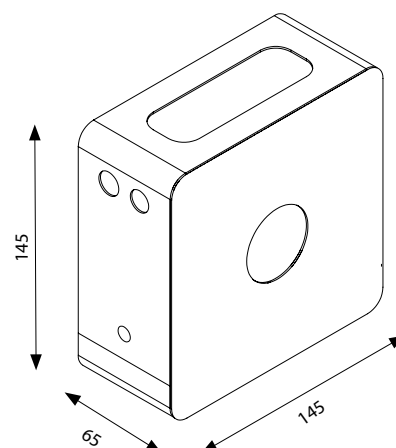



# LED BATTERY PROJECTORS

## AIR BOX

**SG AIRBOX** - PRODUCT CODE  
**SG AIRBOXIP** - IP VERSION

### TECHNICAL DATA


- DMX Wireless Transmitter/Receiver by Wireless Solution for FLOORBAT Serie
- Number of channels: 512
- Operational mode: Transmitter/Receiver
- Operational Frequency: 2.4 GHZ
- Up to 250m range working distance
- Interference free
- USITT DMX 512 protocol
- DMX 3-poles XLR In/Out connectors
- Modulation method: GFSK
- Adaptive Frequency Hopping
- Error correction

### POWER SUPPLY

- Input voltage: 5 Vdc

### WEIGHT AND DIMENSIONS

- Weight: 0,39 Kg
- Dimensions: 135x140x34 mm

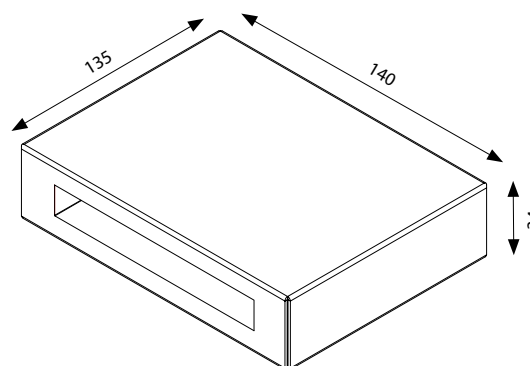





# CONTROLLERS



# CONTROLLERS

# QUIVER



## SG QUIVER - PRODUCT CODE

**SG CASEQUIVER** - CASE (1X SG QUIVER)

**SG CASEQUIVER1X** - CASE (1X SG QUIVER + 1X SG QUIVERX)

**SG CASEQUIVER2X** - CASE (1X SG QUIVER + 2X SG QUIVERX)

**SG QUIVERWI** - WIRELESS TRANSMITTER DMX WIDMX

**SG QUIVERWI2** - WIRELESS TRANSMITTER DMX WSOLUTION

## CONTROLS

- Touch-screen TFT LCD 7" colour display
- 6 control keys for editor
- 6 configurable slider as playback, master group
- 6 configurable key as play, flash, DBO
- 12 keys for direct access to playback and CUES
- 4 touch-fader for the control of the attributes during the programming and control of the effects and during playback and manual use
- Joystick for PAN and TILT movement control with lock and fine/super fine keys

## DESCRIPTION


- Effective graphic interface able to easily manage programming and playback for a maximum of 144 cue-list organize in 12 pages each having a maximum of 999 cues
- 512 channel for each single universe DMX for the control of dimmer and/or intelligent projector, available simultaneously on XLR connector 3-poles
- Up to 1536 channel with Quiver Expand
- Up to 36 Cue-list run concurrently (with 2 Expand connected)
- "Shape engine" customizable and applicable to different functions (PAN&TILT - DIM - COLOR - GOBO - BLADE)
- Up to 6 different families of "palettes" programmable for a flexible and easy control of intelligent projectors
- Up to 999 Cues for each playback
- Library "personalities" upgradeable, creating fixture via software for PC (included)
- "Palettes" Chris/Gam/Lee and Rosco pre-program usable on all machines with mixing colors RGB or CMY
- Maximum Number of storable cues to show: 999
- RDM ready (Prepared for enlargement of technology)
- Wireless ready (Designed for the insertion of a wireless transmitter sold separately)
- External Power Supply: 100-240V 50-60Hz
- USB Pendrive (included)
- USB Gooseneck led light (included)
- Protective cover (included)

## CONNECTIONS

- DMX out: 1x XLR 3-poles
- Expand: 2x RJ45 for expansions connection
- USB 1x port for backup, lamp power supply and update the fixture
- Jack 6,3mm for connecting the pedals for controlling the gearbox scenes

## WEIGHT AND DIMENSIONS

- Net weight: 3,4 kg
- Dimensione: 420X98X288 mm

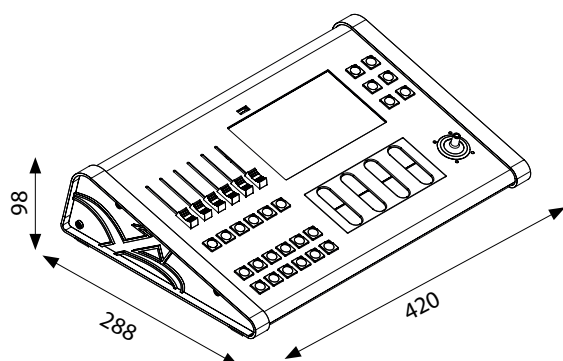

# CONTROLLERS

## QUIVER X



### SG QUIVERX - PRODUCT CODE

#### CONTROLS

- 6 configurable slider as playback, master group
- 6 configurable key as play, flash, DBO
- 12 keys for direct access to playback and CUES

#### CONNECTIONS

- DMX out: 1x XLR 3-poles
- Expand: 1x RJ45 for expansions connection to Quiver

#### WEIGHT AND DIMENSIONS

- Net weight: 1,4 kg
- Dimensions: 196x98x288 mm




### EXAMPLE OF CASE



### QUIVER + 1 QUIVER X



### QUIVER + 2 QUIVER X

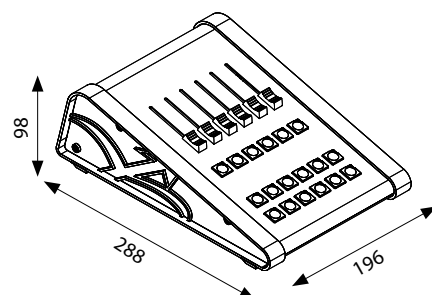


A close-up photograph of a fog machine's control panel. The panel is dark with a digital display at the top showing the text "Hazer Heating is Complete". Below the display are four buttons labeled "FUNC / EBC", "TIMER", "START", and "SET". Further down are two DMX 5-pin ports, each with "OUT" and "IN" labels. To the right of the panel is a large, metallic, funnel-shaped nozzle filled with a dark, granular substance. The entire scene is illuminated with a strong blue and purple light, creating a dramatic, low-key effect. The background is dark and out of focus.

Hazer Heating  
is Complete

**AMBIENT  
EFFECTS**

# AMBIENT EFFECT

# HAZER 1500

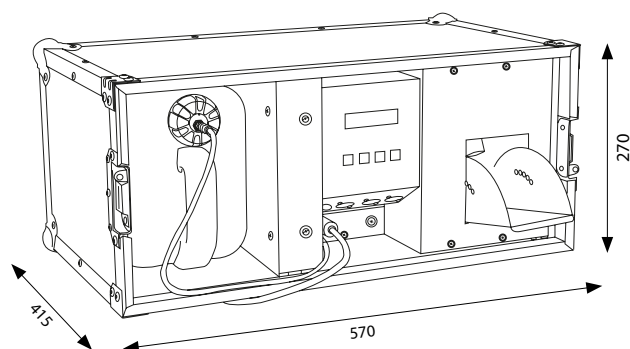

## SG H1500 - PRODUCT CODE

### EFFECTS

- Hazer effect

### CONTROL AND PROGRAMMING

- 2 different DMX channels configurations
- Fan's speed adjustable via software and via DMX
- USITT DMX 512 protocol
- Automatic safety shutdown circuit for pump prevention in case of finished liquid in the circuit
- Heating time: 4 mins
- Smoke output: 1700 cuft
- Continue output
- Manual mode adjustable via display

### STRUCTURE AND CABINET

- Metal housing, black color
- Blue LCD graphic display
- Flight case included, for easy transportation
- Comfortable handle for transportation
- High performance pump for optimal emission
- High speed axial fan
- External tank: 6 litres
- DMX 3/5-poles XLR In/Out connectors
- IP rating: IP20
- For best applications and correct function we recommend using Sagitter fluids

### POWER SUPPLY

- Input Voltage: AC~230V 50Hz
- Max power: 1500W @ 230VAC
- Power IN connection with powerCON sockets
- Power supply cable 1,5 mt included

### WEIGHT AND DIMENSIONS

- Net weight: 18 kg
- Dimensions: 570x415x270 mm



# AMBIENT EFFECT

## HS - 900



NEW

### SG HS900 - PRODUCT CODE

#### EFFECTS

- Hazer effect

#### CONTROL AND PROGRAMMING

- 1 DMX channel configuration: 2 channels
- Fan's speed adjustable via DMX
- USITT DMX 512 protocol
- Radio remote controller included
- Heating time: 2 mins
- Smoke output: 1300 cuft
- Continue output
- Manual mode adjustable via display

#### STRUCTURE AND CABINET


- Metal housing, black color
- Blue LCD graphic display
- Led indicator for heating and ready to smoke
- High performance pump for optimal emission
- High speed fan
- External tank: 3 litres
- DMX 3-poles XLR In/Out connectors
- IP rating: IP20
- For best applications and correct function we recommend using Sagitter fluids

#### POWER SUPPLY

- Input Voltage: AC~230V, 50Hz
- Max Power: 650 W @ 230VAC
- Power IN connection with VDE sockets
- Power supply cable 1,5 mt included

#### WEIGHT AND DIMENSIONS

- Net weight: 7,3 kg
- Dimensions: 357x335x323 mm

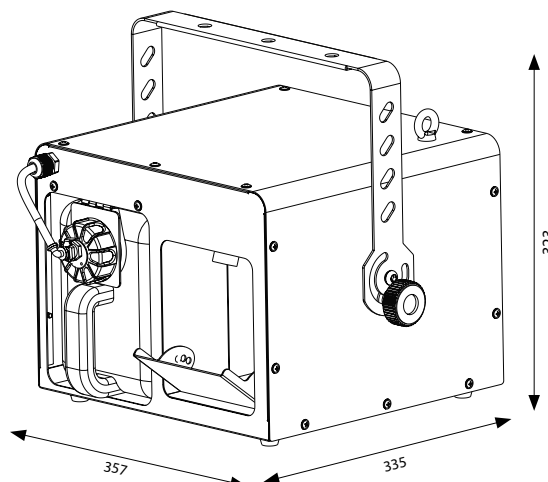










**MOVING HEADS**





NEW

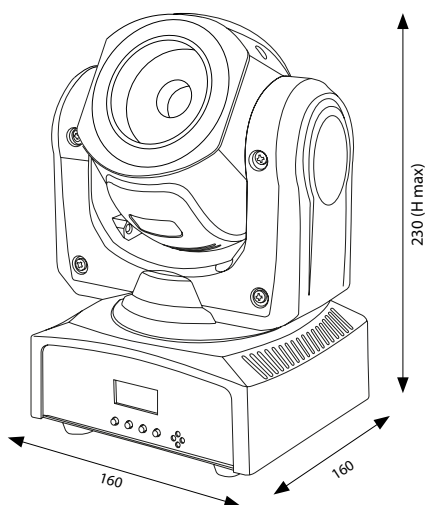**SG SMTDOT - PRODUCT CODE****LIGHT SOURCE**

- 1x40W RGBW led high brightness
- 12 RGB led for external ring
- LED lifespan: >50.000h

**OPTIC SYSTEM**

- Beam angle: 4°

**COLOR SYSTEM**

- LED source RGBW Full color
- Infinite chromatic possibilities

**EFFECTS**

- Ring color rainbow effect in both directions with adjustable speed
- Linear dimmer 0-100%
- Electronic high speed strobe from 1 to 20 flashes/s, with adjustable speed.
- Color macros selectable from DMX

**CONTROL AND PROGRAMMING**

- 2 different DMX channels configurations: 16/30 channels
- USITT DMX 512 protocol
- Master/Slave mode selectable
- Sound mode with adjustable sensitivity of microphone
- Reset via DMX

**STRUCTURE AND CABINET**

- Metal housing and high resistance plastic covers, black color
- Red LED display
- Pan 540° / Tilt 210°
- Mounting points: 1 omega holder + safety ring
- DMX 3-poles XLR In/Out connectors
- IP Rating: IP20
- Forced air fan cooling system

**POWER SUPPLY**

- Input Voltage: AC~100-240V 50/60Hz
- Switching power supply unit
- Max Power: 60W @ 230VAC
- Power IN connection with VDE sockets
- Power supply cable 1,5 mt included


**WEIGHT AND DIMENSIONS**

- Net weight: 2,4 kg
- Dimensions: 160x160x230mm





NEW

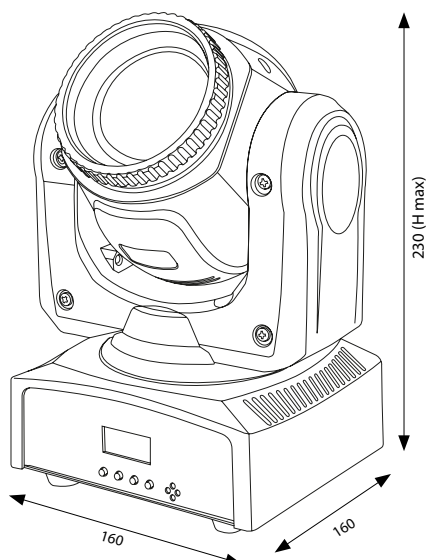**SG SMTBEAM - PRODUCT CODE****LIGHT SOURCE**

- 1x40W White led high brightness
- LED lifespan: >50.000h

**OPTIC SYSTEM**

- Beam angle: 4°
- Manual focus

**COLOR SYSTEM**

- Color wheel: 11 colors + white

**EFFECTS**

- Gobo wheel: 11 fixed gobos
- Gobo scroll from slow to fast
- Color rainbow effect with adjustable speed
- Linear dimmer 0-100%
- Electronic high speed strobe from 1 to 20 flashes/s, with adjustable speed.
- Pan/Tilt macros selectable from DMX

**CONTROL AND PROGRAMMING**

- 2 different DMX channels configurations: 9/11 channels
- USITT DMX 512 protocol
- Master/Slave mode
- Sound mode with adjustable sensitivity of microphone
- Reset via DMX

**STRUCTURE AND CABINET**

- Metal housing and high resistance plastic covers, black color
- Red LED display
- Pan 540° / Tilt 210°
- Mounting points: 1 omega holder + safety ring
- DMX 3-poles XLR In/Out connectors
- IP Rating: IP20
- Forced air fan cooling system

**POWER SUPPLY**

- Input Voltage: AC~100-240V 50/60Hz
- Switching power supply unit
- Max Power: 50W @ 230VAC
- Power IN connection with VDE sockets
- Power supply cable 1,5 mt included

**WEIGHT AND DIMENSIONS**

- Net weight: 2,4 kg
- Dimensions: 160x160x230mm





**SG SMTWHPLUS - PRODUCT CODE****LIGHT SOURCE**

- 7x12W led RGBWA Full Color
- LED lifespan: > 50.000h

**OPTIC SYSTEM**

- Beam Angle: 25°

**COLOR SYSTEM**

- Led Source 5 in 1 RGBWA Full Color
- Infinite chromatic possibilities

**EFFECTS**

- Linear dimmer 0-100%
- Adjustable strobe effect
- Color macro selectable from DMX

**CONTROL AND PROGRAMMING**

- 2 DMX configurations available: 5/14 channels
- USITT DMX 512 protocol
- Master/Slave mode
- Sound mode with adjustable microphone sensitivity
- Auto mode

**STRUCTURE AND CABINET**


- Metal housing and high resistance plastic covers, black color
- Red LED display
- Pan angle 540°
- Tilt angle 180°
- Mounting points: 1 omega holder + safety ring
- DMX 3-poles XLR In/Out connectors
- IP rating: IP20
- Forced air cooling system

**POWER SUPPLY**

- Input Voltage: AC~100-240V, 50/60 Hz
- Switching power supply unit
- Max power: 100W @ 230VAC
- Power IN connection with VDE sockets
- Power supply cable 1mt included

**WEIGHT AND DIMENSIONS**

- Net weight: 3,5 kg
- Dimensions: 175x175x250 mm

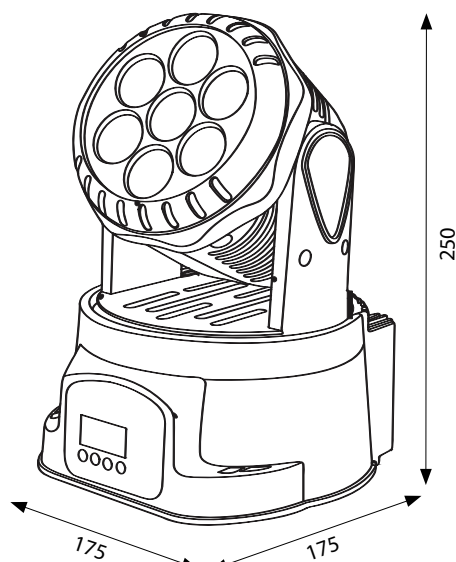

# SMART SPOT PLUS



## SG SMTSPOTPLUS - PRODUCT CODE

### LIGHT SOURCE

- 1x60W white LED high brightness
- LED Color temperature: 5600K
- LED lifespan: >50.000h

### OPTIC SYSTEM

- Beam angle: 13°
- Manual focus

### COLOR SYSTEM

- Color wheel: 7 colors + white

### EFFECTS

- Gobo wheel: 7 fixed gobos that can be combined with color wheel
- Gobo shake
- Gobo scroll in both directions
- Color rainbow effect in both directions with adjustable speed
- Linear dimmer 0-100%
- High speed electronic strobe from 1 to 20 flashes/s, adjustable speed
- Color and Pan&Tilt macros selectable from DMX

### CONTROL AND PROGRAMMING

- 3 different DMX channels configurations: 5/9/11 channels
- USITT DMX 512 protocol
- Pan&Tilt 8/16 bit selectable resolution
- Master/Slave mode
- Sound mode with adjustable sensitivity of microphone
- Reset via DMX

### STRUCTURE AND CABINET


- Metal housing and high resistance plastic covers, black color
- Blue LED display
- Pan 540° / Tilt 230°
- Mounting points: 1 omega holder + safety ring
- DMX 3-poles XLR In/Out connectors
- IP Rating: IP20
- Forced air fan cooling system

### POWER SUPPLY

- Input Voltage: AC~100-240V 50/60Hz
- Switching power supply unit
- Max power: 70W @ 230VAC
- Power IN connection with VDE sockets
- Power supply cable 1,5 mt included

### WEIGHT AND DIMENSIONS

- Net weight: 3,0 kg
- Dimensions: 205x145x275 mm

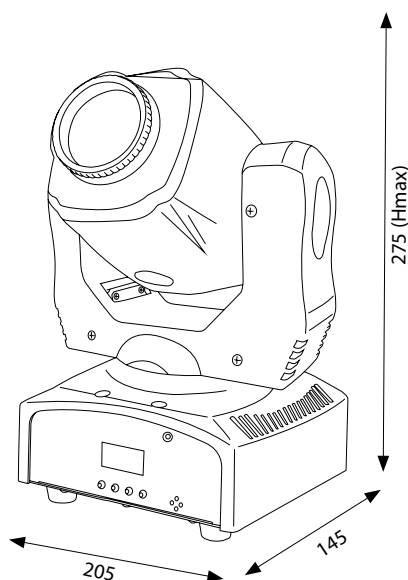



**SG CLSPOT100** - PRODUCT CODE  
**SG CASECLUB** - CASE (4X SG CLSPOT100)

#### LIGHT SOURCE

- 1x100W white led high brightness
- Color temperature 5600K
- LED lifespan: >50.000h
- LED Refresh frequency: >400Hz flicker-free

#### OPTIC SYSTEM

- Beam angle: 9,4°
- Electronic focus
- Luminous flux: 3600 lux @5mt (9.4°)

#### COLOR SYSTEM

- Color wheel with 7 colors + white

#### EFFECTS

- 7 dichroic rotating gobos, the gobos are interchangeable with the "plug & play" system. Gobo size 21,8mm / focus 14,5mm
- Bidirectional gobo scroll with adjustable speed
- Gobo shake effect
- Gobo Scroll with variable speed
- 3-facet rotating prism with adjustable speed in both directions
- Color rainbow effect in both directions
- Linear dimmer 0 - 100%
- High speed electronic strobe max.25 flashes/s, with adjustable speed
- Random strobe and pulse dimmer effects with adjustable speed

#### CONTROL AND PROGRAMMING

- 2 DMX configurations available: 11/13 channels
- USITT DMX 512 protocol
- Pan&Tilt 8/16 bit selectable resolution
- Master / Slave mode
- Sound mode with adjustable microphone sensitivity
- Auto mode with 7 internal programs selectable from display
- Reset via DMX

#### STRUCTURE AND CABINET


- Metal housing and high resistance plastic covers, black color
- Red LED display
- 3 different Pan&Tilt angle presets: PAN 360°-540°-630°, TILT 90°-180°-270°
- Mounting points: one 1/4-turn lock omega holder
- Automatic repositioning of PAN and TILT after accidental movement
- DMX 3-poles XLR In/Out connectors
- IP Rating: IP20
- Forced air fan cooling system with electronic control

#### POWER SUPPLY

- Input Voltage: AC~100-240V 50/60Hz
- Switching power supply unit
- Max power: 120W @ 230VAC
- Power IN connection with powerCON sockets
- Power supply cable 1,5 mt included

#### WEIGHT AND DIMENSIONS

- Net weight: 6,8 kg
- Dimensions: 270x149x366 mm

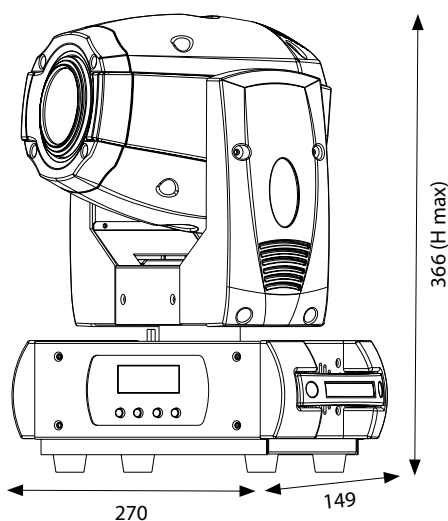



**SG CLBEAM100** - PRODUCT CODE  
**SG CASECLUB** - CASE (4X SG CLBEAM100)

#### LIGHT SOURCE

- 1x100W white led high brightness
- Color temperature 5600K
- LED lifespan: >50.000h
- LED Refresh frequency: >400Hz flicker-free

#### OPTIC SYSTEM

- Beam angle: 2°
- Electronic focus
- Luminous flux: 21300 lux @5mt (2°)

#### COLOR SYSTEM

- Color wheel with 14 colors + white

#### EFFECTS

- Gobo wheel: 17 fixed gobos
- Bidirectional gobo scroll with adjustable speed
- 8-facet rotating prism with adjustable speed
- Color rainbow effect in both directions
- Linear dimmer 0 - 100%
- High speed electronic strobe max.25 flashes/s, with adjustable speed
- Random strobe and pulse dimmer effects with adjustable speed

#### CONTROL AND PROGRAMMING

- 2 DMX configurations available: 10/12 channels
- USITT DMX 512 protocol
- Pan&Tilt 8/16 bit selectable resolution
- Master / Slave mode
- Sound mode with adjustable microphone sensitivity
- Auto mode with 7 internal programs selectable from display
- Reset via DMX

#### STRUCTURE AND CABINET


- Metal housing and high resistance plastic covers, black color
- Red LED display
- 3 different Pan&Tilt angle presets: PAN 360°-540°-630°, TILT 90°-180°-270°
- Mounting points: 1 omega holder
- Automatic repositioning of PAN and TILT after accidental movement not controlled by control unit
- DMX 3-poles XLR In/Out connectors
- IP Rating: IP20
- Forced air fan cooling system with electronic control

#### POWER SUPPLY

- Input Voltage: AC~100-240V 50/60Hz
- Switching power supply unit
- Max power: 120W @ 230VAC
- Power IN connection with powerCON sockets
- Power supply cable 1,5 mt included

#### WEIGHT AND DIMENSIONS

- Net weight: 7,3 kg
- Dimensions: 270x149x364 mm

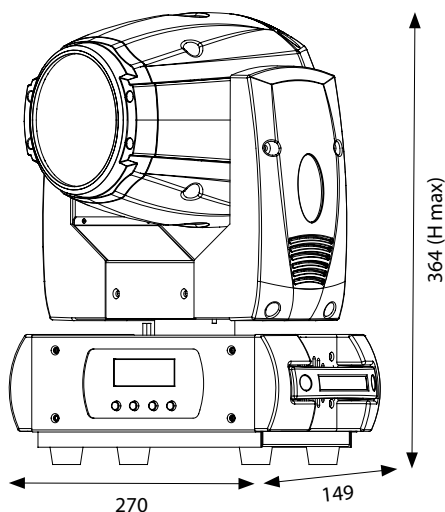



**SG CLWASH - PRODUCT CODE****SG CLWASHKIT** - KIT (2x SG CLWASH + 1 SG CASESCLWASH)**SG CASESCLWASH** - CASE (4x SG CLWASH)**LIGHT SOURCE**

- 36x10W led RGBW Full Color
- LED lifespan: > 50.000h
- LED refresh frequency: > 400Hz flicker-free

**OPTIC SYSTEM**

- Beam Angle: zoom from 8° to 50°
- Luminous flux: 1.130 lux @ 5mt (8°)

**COLOR SYSTEM**

- LED source RGBW Full color
- Infinite chromatic possibilities

**EFFECTS**

- Linear dimmer 0-100%
- Electronic high speed strobe from 1 to 25 flashes/s, with adjustable speed.
- Random strobe and pulse effect with adjustable speed
- Color macros selectable via DMX

**CONTROL AND PROGRAMMING**

- 1 DMX configurations available: 14 channels
- USITT DMX 512 protocol
- Master/Slave mode
- Sound mode with adjustable microphone sensitivity
- Auto mode
- Reset via DMX

**STRUCTURE AND CABINET**



- Metal housing and high resistance plastic covers, black color
- Blue LCD graphic display
- Pan angle: 540°
- Tilt angle: 250°
- Mounting points: 1 pair of 1/4-turn lock omega holders
- Automatic repositioning of Pan and Tilt after accidental movements
- DMX 3-poles XLR In/Out connectors
- IP rating: IP20
- Forced air cooling system with electronic control

**POWER SUPPLY**

- Input Voltage: AC~100-240V, 50/60 Hz
- Switching power supply unit
- Max power: 370W @ 230VAC
- Power IN connection with powerCON sockets
- Power supply cable 1mt included

**WEIGHT AND DIMENSIONS**


- Net weight: 9,8 kg
- Dimensions: 335x235x442 mm

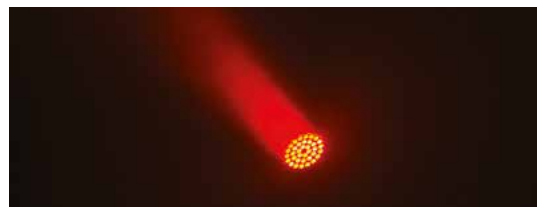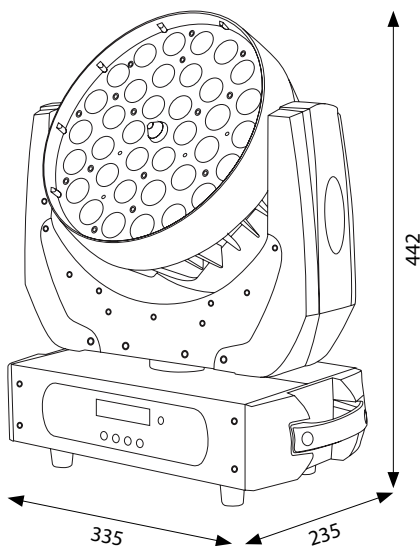





NEW

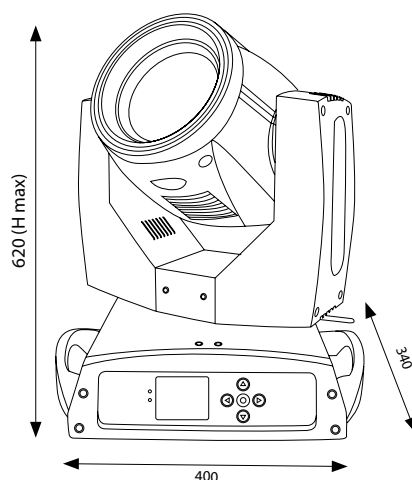**SG CLBEAM7R - PRODUCT CODE****SG CLBEAM7RKIT - KIT (2x SG CLBEAM7R + 1x SG CASECLBEAM7R)****SG CASECLBEAM7R - CASE (2x SG CLBEAM7R)****LIGHT SOURCE**

- Lamp: 7R 230W
- Lamp lifespan: 2000h
- Electronic ballast

**OPTIC SYSTEM**

- Beam Angle: 3,8°
- Electronic focus
- Luminous flux: 41.700 lux @ 20mt

**COLOR SYSTEM**

- Color wheel with 14 colors + white (2x CTO - CTB)

**EFFECTS**

- Fixed gobo wheel with 17 gobos and 6 steps "beam reducer"
- Gobo shacking effect
- Gobo scroll effect with adjustable speed
- 8-facet circular rotating prism with adjustable speed
- Color rainbow effect
- Linear dimmer 0-100%
- Adjustable strobe effect
- Random strobe effect

**CONTROL AND PROGRAMMING**

- 1 DMX configuration available: 16 channels
- USITT DMX 512 protocol
- Built-in analyzer for easy fault finding

**STRUCTURE AND CABINET**

- Metal housing and high resistance plastic covers, black color
- Color LCD display
- Pan angle: 540°
- Tilt angle: 270°
- Mounting points: 2 pairs of 1/4-turn locks
- Automatic repositioning of Pan and Tilt after accidental movements
- DMX 3-poles XLR In/Out connectors
- IP rating: IP20
- Forced air cooling system with electronic control

**POWER SUPPLY**

- Input Voltage: AC~100-240V, 50/60 Hz
- Switching power supply unit
- Max power: 270W @ 230VAC
- Power IN connection with powerCON sockets
- Power supply cable 1mt included

**WEIGHT AND DIMENSIONS**


- Net weight: 16,5 kg
- Dimensions: 400x340x620mm





# LED PROJECTORS

## SLIMPAR 7 DL

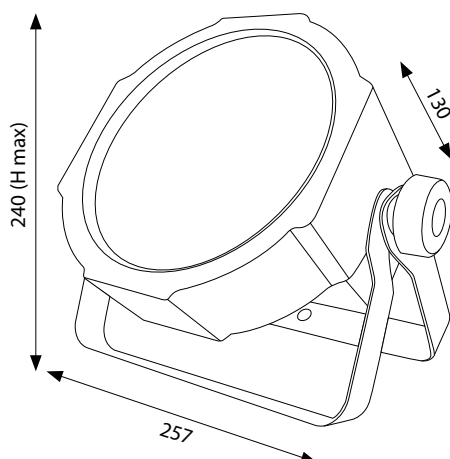**SG SLIMPAR7DL - PRODUCT CODE****LIGHT SOURCE**

- 7x12W led RGBWAU Full Color
- LED lifespan: >50,000h
- LED refresh frequency: >400Hz flicker free

**OPTIC SYSTEM**

- Beam angle: 25°
- Luminous flux: 2290 lux @3mt (25°)

**COLOR SYSTEM**

- LED source 6 in 1 RGBWAU Full Color
- Infinite chromatic possibilities and colour temperature control
- Color temperature control with Amber color
- "Dark Light" technology LED UV (Ultra Violet)
- 2 color macros can be recalled by DMX

**EFFECTS**

- Linear Dimmer 0-100%
- Electronic strobe: 1-20 flashes/s with adjustable speed

**CONTROL AND PROGRAMMING**

- 4 DMX configurations available: 1/6/7/10 channels
- USITT DMX 512 protocol
- Master / Slave mode
- Sound mode with adjustable mic sensitivity
- Static color mode with independent adjustment of strobe
- Automatic mode with 2 different programs selectable from the display with independent adjustment of the speed and strobe
- Color mode with 50 different pre-programmed color macros with independent adjustment of the strobe
- IR remote controller included with possibility to recall colors or macros

**STRUCTURE AND CABINET**

- High resistance ABS housing, black color
- Red LED display
- Mounting points: double adjustable brackets
- "Light up" positioning without brackets
- DMX 3-poles XLR In/Out connectors
- IP rating: IP20
- Forced air fan cooling system


**POWER SUPPLY**

- Input Voltage: AC~100-240V 50/60Hz
- Switching power supply unit
- Max power: 100W @ 230VAC
- Power In/Out connection with VDE socket
- Power supply cable 1,5 mt included
- Max 6 pcs linkable @240V

**WEIGHT AND DIMENSIONS**

- Net weight: 2,1 kg
- Dimensions: 257x130x240 mm

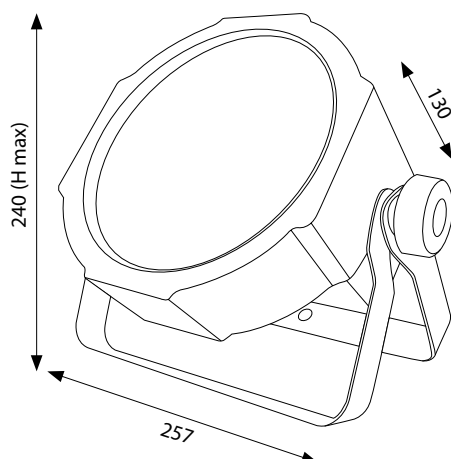

**SG SLIMPAR12DL - PRODUCT CODE****LIGHT SOURCE**

- 12x12W led RGBWAU Full Color
- LED lifespan: >50.000h
- LED refresh frequency: >400Hz flicker free

**OPTIC SYSTEM**

- Beam angle: 25°
- Luminous flux: 1210 lux @5mt (25°)

**COLOR SYSTEM**

- LED source 6 in 1 RGBWAU Full Color
- Infinite chromatic possibilities and colour temperature control
- Color temperature control with Amber color
- "Dark Light" technology LED UV (Ultra Violet)
- 2 color macros can be recalled by DMX

**EFFECTS**

- Linear Dimmer 0-100%
- Electronic strobe: 1-20 flashes/s with adjustable speed

**CONTROL AND PROGRAMMING**

- 4 DMX configurations available: 1/6/7/10 channels
- USITT DMX 512 protocol
- Master / Slave mode
- Sound mode with adjustable mic sensitivity
- Static color mode with independent adjustment of strobe
- Automatic mode with 2 different programs selectable from the display with independent adjustment of the speed and strobe
- Color mode with 50 different pre-programmed color macros with independent adjustment of the strobe
- IR remote controller included with possibility to recall colors or macros

**STRUCTURE AND CABINET**

- High resistance ABS housing, black color
- Red LED display
- Mounting points: double adjustable brackets
- "Light up" positioning without brackets
- DMX 3-poles XLR In/Out connectors
- IP rating: IP20
- Forced air fan cooling system

**POWER SUPPLY**

- Input Voltage: AC~100-240V 50/60Hz
- Switching power supply unit
- Max power: 160W @ 230VAC
- Power In/Out connection with VDE socket
- Power supply cable 1,5 mt included
- Max 4 pcs linkable @240V

**WEIGHT AND DIMENSIONS**

- Net weight: 2,1 kg
- Dimensions: 257x130x240 mm





## SLIMPAR 12

**SG SLIMPAR12 - PRODUCT CODE****LIGHT SOURCE**

- 12x8W led RGBW Full Color
- LED lifespan: >50.000h
- LED refresh frequency: >400Hz flicker free

**OPTIC SYSTEM**

- Beam angle: 25°
- Luminous flux: 1060 lux @5mt (25°)

**COLOR SYSTEM**

- LED source 4 in 1 RGBW Full Color
- Infinite chromatic possibilities and colour temperature control
- 2 color macros can be recalled by DMX

**EFFECTS**

- Linear Dimmer 0-100%
- Electronic strobe: 1-20 flashes/s with adjustable speed

**CONTROL AND PROGRAMMING**

- 4 DMX configurations available: 1/4/5/8 channels
- USITT DMX 512 protocol
- Master / Slave mode
- Sound mode with adjustable mic sensitivity
- Static color mode with independent adjustment of strobe
- Automatic mode with 2 different programs selectable from the display with independent adjustment of the speed and strobe
- Color mode with 50 different pre-programmed color macros with independent adjustment of the strobe
- IR remote controller included with possibility to recall colors or macros

**STRUCTURE AND CABINET**


- High resistance ABS housing, black color
- Red LED display
- Mounting points: double adjustable brackets
- "Light up" positioning without brackets
- DMX 3-poles XLR In/Out connectors
- IP rating: IP20
- Forced air fan cooling system

**POWER SUPPLY**


- Input Voltage: AC~100-240V 50/60Hz
- Switching power supply unit
- Max power: 110W @ 230VAC
- Power In/Out connection with VDE socket
- Power supply cable 1,5 mt included
- Max 6 pcs linkable @240V

**WEIGHT AND DIMENSIONS**

- Net weight: 2,1 kg
- Dimensions: 257x130x240 mm

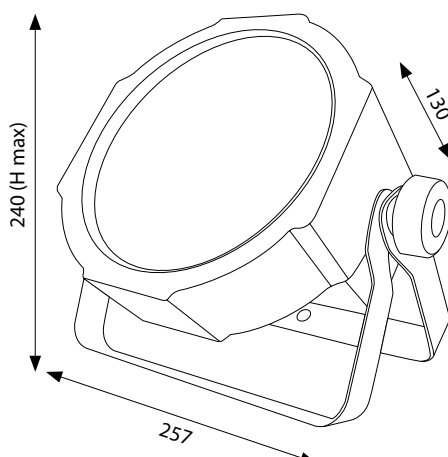

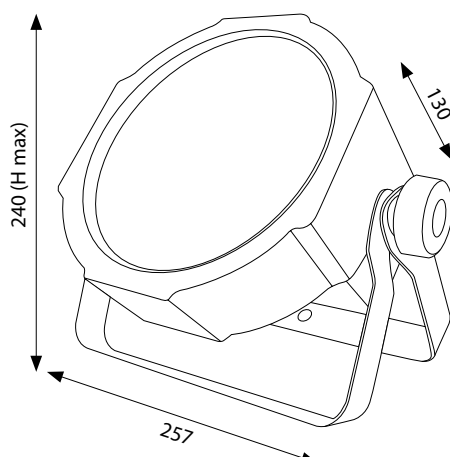

**SG SLIMPAR18 - PRODUCT CODE****LIGHT SOURCE**

- 18x3W led RGB Full Color
- LED lifespan: >50.000h
- LED refresh frequency: >400Hz flicker free

**OPTIC SYSTEM**

- Beam angle: 25°
- Luminous flux: 1140 lux @5mt (25°)

**COLOR SYSTEM**

- LED source 3 in 1 RGB Full Color
- Infinite chromatic possibilities and colour temperature control
- 2 color macros can be recalled by DMX

**EFFECTS**

- Linear Dimmer 0-100%
- Electronic strobe: 1-20 flashes/s with adjustable speed

**CONTROL AND PROGRAMMING**

- 4 DMX configurations available: 1/3/4/7 channels
- USITT DMX 512 protocol
- Master / Slave mode
- Sound mode with adjustable mic sensitivity
- Static color mode with independent adjustment of strobe
- Automatic mode with 2 different programs selectable from the display with independent adjustment of the speed and strobe
- Color mode with 50 different pre-programmed color macros with independent adjustment of the strobe
- IR remote controller included with possibility to recall colors or macros

**STRUCTURE AND CABINET**

- High resistance ABS housing, black color
- Red LED display
- Mounting points: double adjustable brackets
- "Light up" positioning without brackets
- DMX 3-poles XLR In/Out connectors
- IP rating: IP20
- Forced air fan cooling system

**POWER SUPPLY**

- Input Voltage: AC~100-240V 50/60Hz
- Switching power supply unit
- Max power: 70W @ 230VAC
- Power In/Out connection with VDE socket
- Power supply cable 1,5 mt included
- Max 6 pcs linkable @240V

**WEIGHT AND DIMENSIONS**

- Net weight: 2,1 kg
- Dimensions: 257x130x240 mm



**SG SLIMPAR18C - PRODUCT CODE****LIGHT SOURCE**

- 18x1W led RGB
- LED lifespan: > 50.000h

**OPTIC SYSTEM**

- Beam Angle: 25°

**COLOR SYSTEM**

- LED source RGBW (6R - 6G - 6B)
- Infinite chromatic possibilities

**EFFECTS**

- Linear dimmer 0-100%
- Adjustable strobe effect
- Random strobe effect
- Color macros selectable via DMX

**CONTROL AND PROGRAMMING**

- 1 DMX configuration available: 6 channels
- USITT DMX 512 protocol
- Master/Slave mode
- Sound mode
- Auto mode
- IR remote controller included with possibility to recall colors or macros

**STRUCTURE AND CABINET**


- High resistance ABS housing, black color
- Red LED display
- Mounting points: double adjustable brackets
- "Light-up" positioning without brackets
- DMX 3-poles XLR In/Out connectors
- IP rating: IP20
- Forced air fan cooling system

**POWER SUPPLY**

- Input Voltage: AC~100-240V, 50/60 Hz
- Switching power supply unit
- Max power: 25W @ 230VAC
- Power In/Out connection with VDE socket
- Power supply cable 1mt included

**WEIGHT AND DIMENSIONS**

- Net weight: 1,25 kg
- Dimensions: 230x105x200 mm

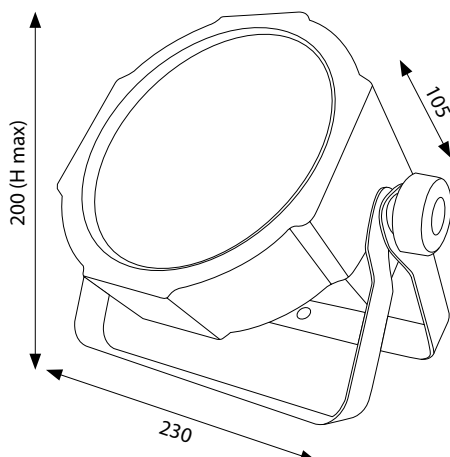

**SG SLIMPARFLC - PRODUCT CODE****LIGHT SOURCE**

- 224x0,5W led Edison 6500K
- LED lifespan: > 50.000h

**OPTIC SYSTEM**

- Beam Angle: 120°

**COLOR SYSTEM**

- LED source 224x0,5W led Edison 6500K

**EFFECTS**

- Linear dimmer 0-100%
- Adjustable strobe effect
- Random strobe effect
- Circular sectors control

**CONTROL AND PROGRAMMING**

- 7 DMX configurations available: 1/2/4/7/8/9/11 channels
- USITT DMX 512 protocol
- Master/Slave mode
- Sound mode
- Auto mode
- IR remote controller included with possibility to recall colors or macros

**STRUCTURE AND CABINET**



- High resistance ABS housing, black color
- Red LED display
- Mounting points: double adjustable brackets
- "Light-up" positioning without brackets
- DMX 3-poles XLR In/Out connectors
- IP rating: IP20
- Forced air fan cooling system

**POWER SUPPLY**

- Input Voltage: AC~100-240V, 50/60 Hz
- Switching power supply unit
- Max power: 90W @ 230VAC
- Power In/Out connection with VDE socket
- Power supply cable 1mt included

**WEIGHT AND DIMENSIONS**

- Net weight: 1,5 kg
- Dimensions: 257x130x240 mm

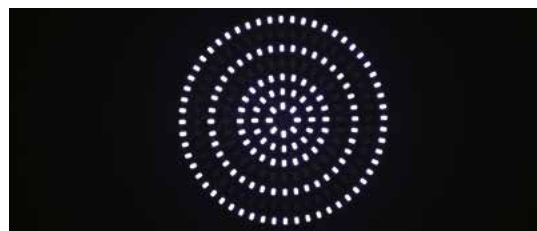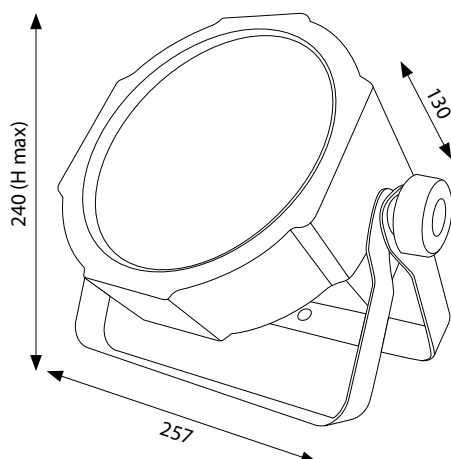

# SLIMPAR COB 30



## SG SLIMPARCOB30 - PRODUCT CODE

### LIGHT SOURCE

- 1x30W RGBW COB led
- LED lifespan: >50.000h
- LED refresh frequency: >400Hz flicker-free

### OPTIC SYSTEM

- Beam angle: 50°

### COLOR SYSTEM

- RGBW full color mixing
- Infinite chromatic possibilities

### EFFECTS

- Fine linear Dimmer 0-100%
- Adjustable strobe 1-10 flash/s

### CONTROL AND PROGRAMMING

- 1 DMX configuration available: 7 channels
- USITT DMX 512 protocol
- Master/Slave mode
- Sound Mode
- Automatic mode
- IR remote controller included with possibility to recall colors or macros

### STRUCTURE AND CABINET


- High resistance ABS housing, black color
- Red led display
- Mounting points: double adjustable brackets
- "Light-up" positioning without brackets
- DMX 3-poles XLR In/Out connectors
- IP rating: IP20
- Forced air fan cooling system

### POWER SUPPLY

- Input Voltage: AC~100-240V, 50/60 Hz
- Switching power supply unit
- Max power: 35W @ 230VAC
- Power In/Out connection with VDE socket
- Power supply cable included

### WEIGHT AND DIMENSIONS

- Net weight: 1,9 kg
- Dimensions: 260x180x240 mm

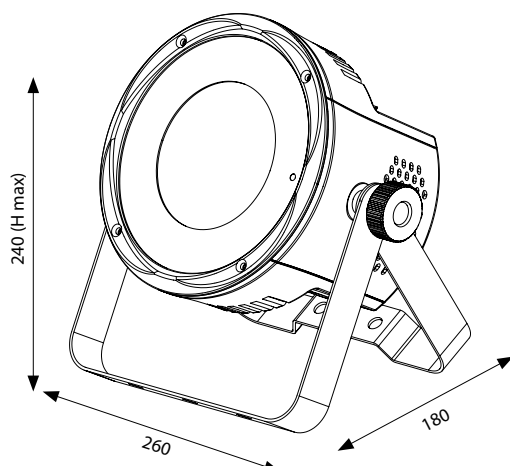



**SG SLIMPARCOB60 - PRODUCT CODE****LIGHT SOURCE**

- 1x60W RGBW COB led
- LED lifespan: >50.000h
- LED refresh frequency: >400Hz flicker-free

**OPTIC SYSTEM**

- Beam angle: 50°

**COLOR SYSTEM**

- RGBW full color mixing
- Infinite chromatic possibilities

**EFFECTS**

- Fine linear Dimmer 0-100%
- Adjustable strobe 1-10 flash/s

**CONTROL AND PROGRAMMING**

- 1 DMX configuration available: 7 channels
- USITT DMX 512 protocol
- Master/Slave mode
- Sound Mode
- Automatic mode
- IR remote controller included with possibility to recall colors or macros

**STRUCTURE AND CABINET**


- High resistance ABS housing, black color
- Red led display
- Mounting points: double adjustable brackets
- "Light-up" positioning without brackets
- DMX 3-poles XLR In/Out connectors
- IP rating: IP20
- Forced air fan cooling system

**POWER SUPPLY**

- Input Voltage: AC~100-240V, 50/60 Hz
- Switching power supply unit
- Max power: 65W @ 230VAC
- Power In/Out connection with VDE socket
- Power supply cable included

**WEIGHT AND DIMENSIONS**

- Net weight: 1,9 kg
- Dimensions: 260x180x240 mm

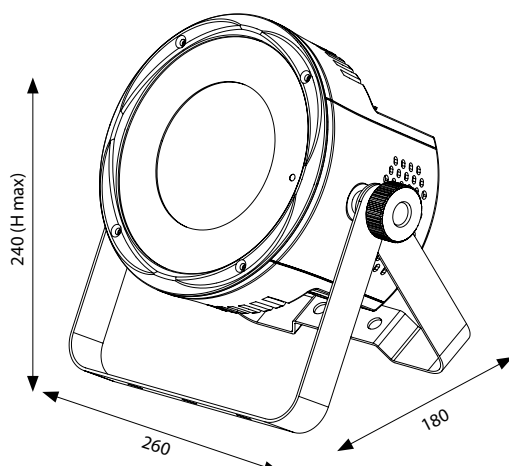



# SLIMPAR COB 100



## SG SLIMPARCOB100 - PRODUCT CODE

### LIGHT SOURCE

- 1x100W RGBW COB led
- LED lifespan: >50.000h
- LED refresh frequency: >400Hz flicker-free

### OPTIC SYSTEM

- Beam angle: 50°

### COLOR SYSTEM

- RGBW full color mixing
- Infinite chromatic possibilities

### EFFECTS

- Fine linear Dimmer 0-100%
- Adjustable strobe 1-10 flash/s

### CONTROL AND PROGRAMMING

- 1 DMX configuration available: 7 channels
- USITT DMX 512 protocol
- Master/Slave mode
- Sound Mode
- Automatic mode
- IR remote control
- IR remote controller included with possibility to recall colors or macros

### STRUCTURE AND CABINET


- High resistance ABS housing, black color
- Red led display
- Mounting points: double adjustable brackets
- "Light-up" positioning without brackets
- DMX 3-poles XLR In/Out connectors
- IP rating: IP20
- Forced air fan cooling system

### POWER SUPPLY

- Input Voltage: AC~100-240V, 50/60 Hz
- Switching power supply unit
- Max power: 105W @ 230VAC
- Power In/Out connection with VDE socket
- Power supply cable included

### WEIGHT AND DIMENSIONS


- Net weight: 1,9 kg
- Dimensions: 260x180x240 mm

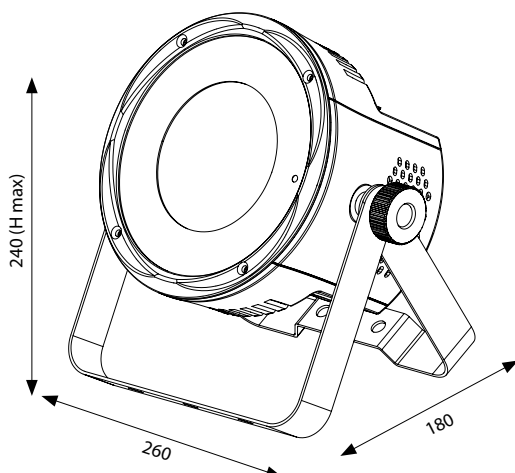

## SLIMPAR 6 BATTERY



NEW

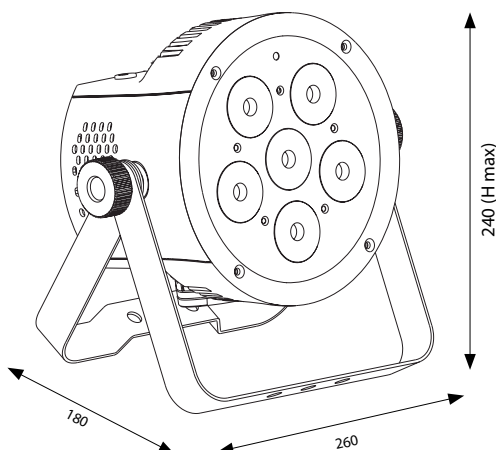**SG SLIMPAR6BAT - PRODUCT CODE****SG CASESLIMPARBAT - CASE (6X SG SLIMPAR6BAT)****LIGHT SOURCE**

- 6x10W led RGBW Full Color
- LED lifespan: >50.000h
- LED refresh frequency: >400Hz flicker free

**OPTIC SYSTEM**

- Beam angle: 15°
- Luminous flux: 1005 lux @5mt (full on)

**COLOR SYSTEM**

- LED source 4 in 1 RGBW Full Color
- Infinite chromatic possibilities

**EFFECTS**

- Linear Dimmer 0-100%
- Electronic strobe: 1-20 flashes/s with adjustable speed

**CONTROL AND PROGRAMMING**

- 3 DMX configurations available: 1/4/7 channels
- USITT DMX 512 protocol
- Built-in DMX wireless (DMX wireless transmitter SG AIRBOX, sold separately)
- Master / Slave mode
- Sound mode with 2 different programs and adjustable mic sensitivity
- Static color mode with strobe adjustment
- Automatic mode with 5 different programs selectable from the display with speed adjustment
- Color mode with 51 different pre-programmed color macros
- IR remote controller included

**STRUCTURE AND CABINET**

- High resistance ABS housing, black color
- Red LED display
- Mounting points: double adjustable brackets
- "Light up" positioning without brackets
- DMX 3-poles XLR In/Out connectors
- IP rating: IP20

**POWER SUPPLY**

- Input Voltage: AC~100-240V 50/60Hz for normal working and battery recharge
- Switching power supply unit
- Internal rechargeable battery: 12,6VDC
- Capacity: 10 Ah
- Runtime battery: ~ 5 hrs (full ON)
- Charging cycle: ~ 8 hrs (Projector off)
- Max power: 48W @ 230VAC
- Power In/Out connection with VDE socket
- Power supply cable 1,5 mt included


**WEIGHT AND DIMENSIONS**

- Net weight: 2,5 kg
- Dimensions: 260x180x240 mm





# **STAGE LEDs**

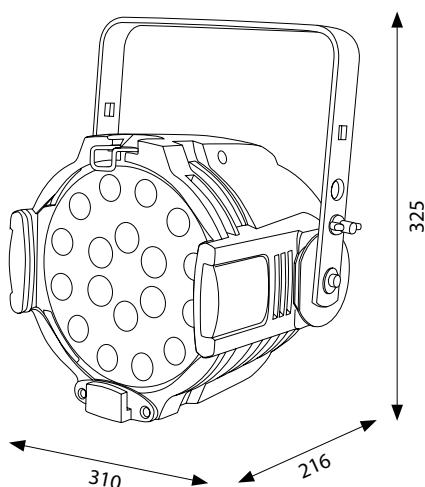

**SG HTZLEDC** - PRODUCT CODE  
**SG CASEHTZ** - CASE (6X SG HTZLEDC)

#### LIGHT SOURCE

- 18x8W led RGBW Full Color
- LED lifespan: >50.000h
- LED refresh frequency: >400Hz flicker free

#### OPTIC SYSTEM

- Beam angle: zoom from 15° to 60°
- Luminous flux: 2250 lux @3mt (15°)

#### COLOR SYSTEM

- LED source 4 in 1 RGBW Full Color
- Infinite chromatic possibilities and colour temperature control
- Color macros can be recalled by DMX

#### EFFECTS

- Linear Dimmer 0-100%
- Electronic strobe: 1-25 flashes/s with adjustable speed

#### CONTROL AND PROGRAMMING

- 6 DMX configurations available: 5/6/6/7/3/13 channels
- 4 selectable dimmer curves
- USITT DMX 512 protocol
- Master / Slave mode
- Sound mode with adjustable mic sensitivity
- Static color mode with independent adjustment of strobe
- Automatic mode with 10 different programs selectable from the display with independent adjustment of the speed and strobe
- Color mode with different pre-programmed color macros

#### STRUCTURE AND CABINET

- Die cast aluminium housing, black color
- Red LED display
- Mounting points: double adjustable brackets
- DMX 3-poles XLR In/Out connectors
- IP rating: IP20
- Forced air fan cooling system

#### POWER SUPPLY

- Input Voltage: AC~100-240V 50/60Hz
- Switching power supply unit
- Max power: 160W @ 230VAC


#### WEIGHT AND DIMENSIONS

- Net weight: 4 kg
- Dimensions: 310x216x325 mm





NEW

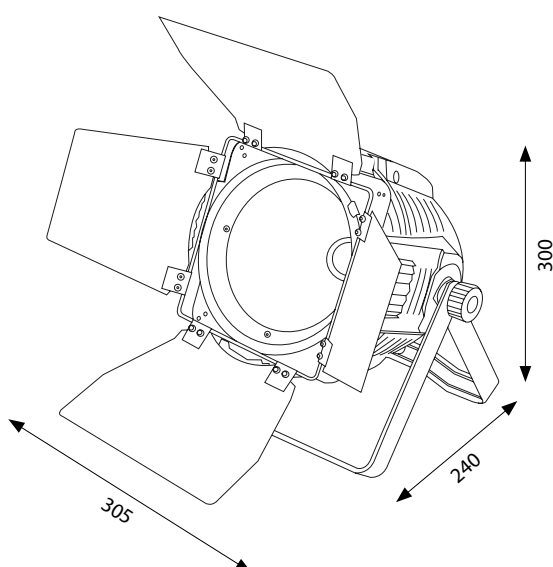

**SG HTZLEDCOBW** - PRODUCT CODE  
**SG CASEHTZCOB** - CASE (6X SG HTZLEDCOBW)

**LIGHT SOURCE**

- 1X200W COB led Warm White 3200K
- LED lifespan: >50,000h
- LED refresh frequency: >400Hz flicker free

**OPTIC SYSTEM**

- Beam angle: 60°
- Luminous flux: 585 lux @ 5m

**COLOR SYSTEM**

- LED source COB Warm White 3200K

**EFFECTS**

- High precision linear Dimmer 0-100%
- Electronic strobe: 1-20 flashes/s with adjustable speed

**CONTROL AND PROGRAMMING**

- 2 DMX configurations available: 1/2 channels
- USITT DMX 512 protocol
- Master / Slave mode

**STRUCTURE AND CABINET**

- Die cast aluminium housing, black color
- Red LED display
- Barn door included
- Mounting points: double adjustable brackets
- DMX 3-poles XLR In/Out connectors
- IP rating: IP20
- Forced air fan cooling system

**POWER SUPPLY**

- Input Voltage: AC~100-240V 50/60Hz
- Switching power supply unit
- Max power: 260W @ 230VAC
- Power In/Out with powerCON connector
- Power supply cable 1,5 mt included

**WEIGHT AND DIMENSIONS**


- Net weight: 3,6 kg
- Dimensions: 305x240x300 mm







NEW

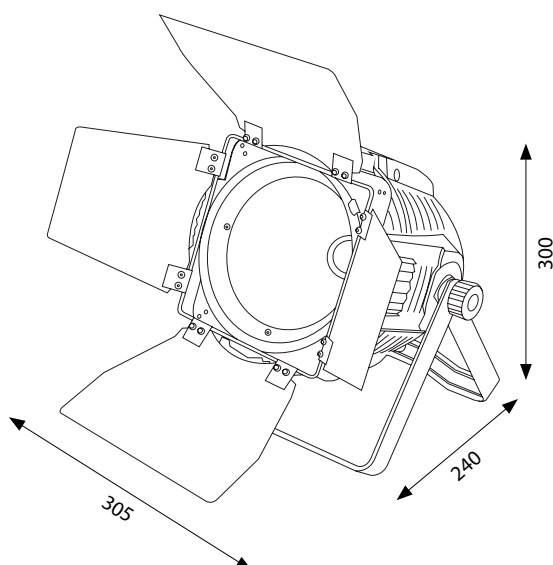**SG HTZLEDCOBC - PRODUCT CODE****SG CASEHTZCOB - CASE (6X SG HTZLEDCOBC)****LIGHT SOURCE**

- 1X200W COB led RGBW
- LED lifespan: >50.000h
- LED refresh frequency: >400Hz flicker free

**OPTIC SYSTEM**

- Beam angle: 60°
- Luminous flux: 405 lux @ 5mt (full on)

**COLOR SYSTEM**

- LED source 4 in 1 RGBW Full Color
- Infinite chromatic possibilities

**EFFECTS**

- High precision linear Dimmer 0-100%
- Electronic strobe: 1-20 flashes/s with adjustable speed

**CONTROL AND PROGRAMMING**

- 2 DMX configurations available: 4/8 channels
- USITT DMX 512 protocol
- Master / Slave mode
- Sound mode
- Color mode with macros and 11 different white temperature programs
- Automatic mode with 10 different programs selectable from the display with speed adjustment

**STRUCTURE AND CABINET**

- Die cast aluminium housing, black color
- Red LED display
- Barndoors included
- Mounting points: double adjustable brackets
- DMX 3-poles XLR In/Out connectors
- IP rating: IP20
- Forced air fan cooling system

**POWER SUPPLY**

- Input Voltage: AC~100-240V 50/60Hz
- Switching power supply unit
- Max power: 260W @ 230VAC
- Power In/Out with powerCON connector
- Power supply cable 1,5 mt included

**WEIGHT AND DIMENSIONS**

- Net weight: 3,6 kg
- Dimensions: 305x240x300 mm





# **LED BATTERY PROJECTORS**



NEW

**SG BATI4DLH - PRODUCT CODE****SG BATI4TX** - DMX WIRELESS TRANSMITTER**SG BATI4DLHKIT** - KIT (8X SG BATI4DLH + 1X SG CASEBATI4DLH)**SG CASEBATI4DLH** - CASE WITH CHARGE SYSTEM (8X SG BATI4DLH)**SG BAGBATI4DLH** - SOFT BAG (4X SG BATI4DLH)**SG CVMBATI4DLH** - MIRROR COVER FOR SG BATI4DLH**SG CVWBATI4DLH** - WHITE COVER FOR SG BATI4DLH**SG CVRBATI4DLH** - RAIN COVER FOR SG BATI4DLH**LIGHT SOURCE**

- 4x12W led RGBWA-UV
- LED lifespan: > 50.000h
- LED refresh frequency: > 400Hz flicker-free

**OPTIC SYSTEM**

- Beam Angle: 15°

**COLOR SYSTEM**

- LED source RGBWA-UV
- Infinite chromatic possibilities

**EFFECTS**

- Linear dimmer 0-100%
- Adjustable strobe effect
- Static color mode: manual adjustment for each color
- Manual color mode: static built-in color macros
- Auto mode: built-in automatic programs with adjustable speed
- Sound mode: sound activation with internal microphone with adjustable sensitivity

**CONTROL AND PROGRAMMING**

- 3 DMX configurations available: 6/6b/10 channels
- USITT DMX 512 protocol
- Built-in Wi-Fi protocol for direct control by smartphone with App
- Built-in DMX wireless transceiver (DMX wireless transmitter SG BATI4TX, sold separately)
- Remote controller included
- Master/Slave mode
- Auto mode

**STRUCTURE AND CABINET**




- Metal housing, black color
- LCD graphic color display
- "Light up" positioning with adjustable angle
- IP rating: IP20
- DMX 3-poles XLR In/Out connectors
- Convection cooling system without fans

**POWER SUPPLY**

- Input Voltage: AC~100-240V, 50/60 Hz, for normal working and battery recharge
- Switching power supply unit
- Internal rechargeable battery: 14,8VDC
- Capacity: 7,8 Ah
- Runtime battery: ~ 5 hrs (full ON)
- Charging cycle: ~ 5 hrs (Projector off)
- Power consumption: 50W @ 230VAC
- Power In/Out connection with powerCON socket

**WEIGHT AND DIMENSIONS**

- Net weight: 3,5 kg
- Dimensions: 140x140x205 mm

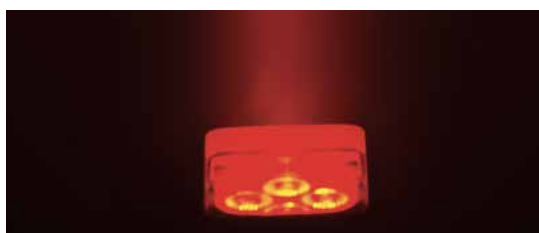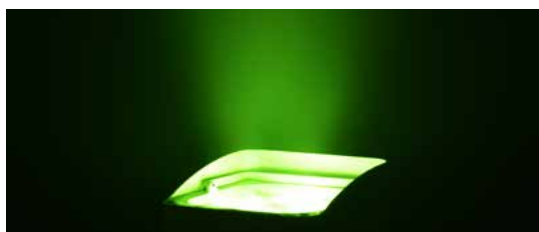



# LED BARS





**SG SLIMBAR12P** - PRODUCT CODE  
**SG CASESLIMBAR16DL** - CASE (4X SG SLIMBAR12P)

#### LIGHT SOURCE

- 12x15W led RGBW Full Color
- LED lifespan: >50.000h
- LED refresh frequency: >400Hz flicker free

#### OPTIC SYSTEM

- Beam angle: 10° x 45°
- Luminous flux: 1420 lux @5mt

#### COLOR SYSTEM

- LED source 4 in 1 RGBW Full Color
- Infinite chromatic possibilities and colour temperature control

#### EFFECTS

- Linear Dimmer 0-100%
- Electronic strobe: 1-20 flashes/s with adjustable speed
- Color macros selectable by DMX
- Single pixel control

#### CONTROL AND PROGRAMMING

- 7 DMX configurations available in: 3/4/5/8/10/48/52 channels
- USITT DMX 512 protocol
- Master / Slave mode
- Sound mode with adjustable mic sensitivity
- Static color mode with independent adjustment of strobe
- Automatic mode with 12 different programs selectable from the display with independent adjustment of the speed and strobe
- Color mode with 51 different pre-programmed color macros with independent adjustment of the strobe
- IR remote controller included with possibility to select colors or macros ( Included )

#### STRUCTURE AND CABINET


- Aluminum housing, black color
- LCD graphic color display
- Mounting points: double adjustable brackets
- Single central bracket for suspension
- "Light up" positioning with angle adjustment
- DMX 3-poles XLR In/Out connectors
- IP rating: IP20
- Forced air fan cooling system with electronic control

#### POWER SUPPLY

- Input Voltage: AC~100-240V 50/60Hz
- Switching power supply unit
- Max power: 190W @ 230VAC
- Power In/Out connection with powerCON socket
- Power supply cable 1,5 mt included
- Max 4 pcs linkable @240V

#### WEIGHT AND DIMENSIONS

- Net weight: 5,1 kg
- Dimensions: 1010x140x160 mm

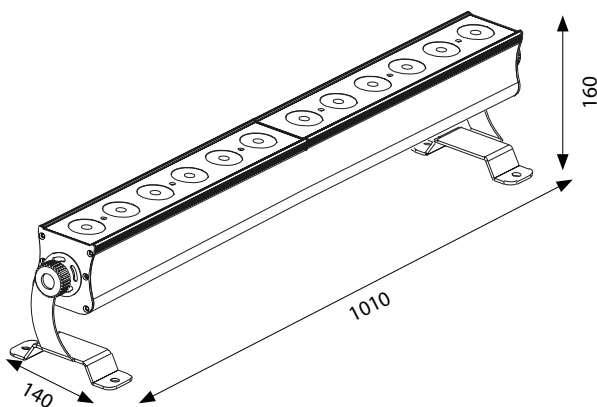

# SLIMBAR 8 DL



**SG SLIMBAR8DL** - PRODUCT CODE  
**SG CASESLIMBAR8DL** - CASE (6X SG SLIMBAR8DL)

## LIGHT SOURCE

- 8x12W led RGBWAU Full Color
- LED lifespan: >50.000h
- LED refresh frequency: >400Hz flicker free

## OPTIC SYSTEM

- Beam angle: 25°
- Luminous flux: 2290 lux @3mt (25°)

## COLOR SYSTEM

- LED source 6 in 1 RGBWAU Full Color
- Infinite chromatic possibilities and colour temperature control
- Color temperature control with Amber color
- "Dark Light" technology LED UV (Ultra Violet)
- 2 color macros can be recalled by DMX

## EFFECTS

- Linear Dimmer 0-100%
- Electronic strobe: 1-20 flashes/s with adjustable speed

## CONTROL AND PROGRAMMING

- 6 DMX configurations available: 1/6/10/12/24/28 channels
- "Double pixel" control system
- USITT DMX 512 protocol
- Master / Slave mode
- Sound mode with adjustable mic sensitivity
- Static color mode with independent adjustment of strobe
- Automatic mode with 12 different programs selectable from the display with independent adjustment of the speed and strobe
- Color mode with 69 different pre-programmed color macros with independent adjustment of the strobe
- IR remote controller included with possibility to recall colors or macros

## STRUCTURE AND CABINET


- Aluminum housing, black color
- Blue LCD graphic display
- Mounting points: double adjustable brackets
- Single central bracket for suspension
- "Light up" positioning with angle adjustment
- DMX 3-poles XLR In/Out connectors
- IP rating: IP20
- Forced air fan cooling system with electronic control

## POWER SUPPLY

- Input Voltage: AC~100-240V 50/60Hz
- Switching power supply unit
- Max power: 110W @ 230VAC
- Power In/Out connection with powerCON socket
- Power supply cable 1,5 mt included
- Max 6 pcs linkable @240V

## WEIGHT AND DIMENSIONS

- Net weight: 3,6 kg
- Dimensions: 505x140x160 mm

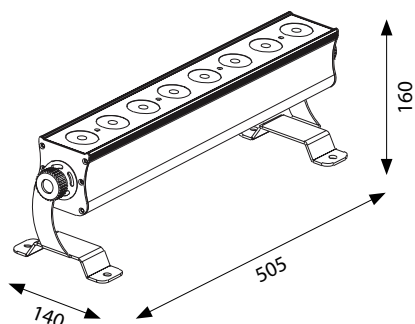



**SG SLIMBAR16DL** - PRODUCT CODE  
**SG CASESLIMBAR16DL** - CASE (4X SG SLIMBAR16DL)

#### LIGHT SOURCE

- 16x12W led RGBWAU Full Color
- LED lifespan: >50.000h
- LED refresh frequency: >400Hz flicker free

#### OPTIC SYSTEM

- Beam angle: 25°
- Luminous flux: 1390 lux @5mt (25°)

#### COLOR SYSTEM

- LED source 6 in 1 RGBWAU Full Color
- Infinite chromatic possibilities and colour temperature control
- Color temperature control with Amber color
- "Dark Light" technology LED UV (Ultra Violet)
- 2 color macros can be recalled by DMX

#### EFFECTS

- Linear Dimmer 0-100%
- Electronic strobe: 1-20 flashes/s with adjustable speed

#### CONTROL AND PROGRAMMING

- 7 DMX configurations available: 1/6/10/12/28/48/52 channels
- "Double pixel" control system
- USITT DMX 512 protocol
- Master / Slave mode
- Sound mode with adjustable mic sensitivity
- Static color mode with independent adjustment of strobe
- Automatic mode with 12 different programs selectable from the display with independent adjustment of the speed and strobe
- Color mode with 69 different pre-programmed color macros with independent adjustment of the strobe
- IR remote controller included with possibility to recall colors or macros

#### STRUCTURE AND CABINET


- Aluminum housing, black color
- Blue LCD graphic display
- Mounting points: double adjustable brackets
- Single central bracket for suspension
- "Light up" positioning with angle adjustment
- DMX 3-poles XLR In/Out connectors
- IP rating: IP20
- Forced air fan cooling system with electronic control

#### POWER SUPPLY



- Input Voltage: AC~100-240V 50/60Hz
- Switching power supply unit
- Max power: 210W @ 230VAC
- Power In/Out connection with powerCON socket
- Power supply cable 1,5 mt included
- Max 4 pcs linkable @240V

#### WEIGHT AND DIMENSIONS

- Net weight: 5,1 kg
- Dimensions: 1010x140x160 mm

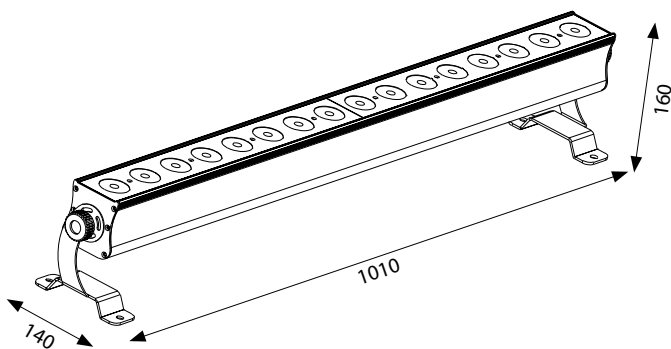

# SLIMBAR 240

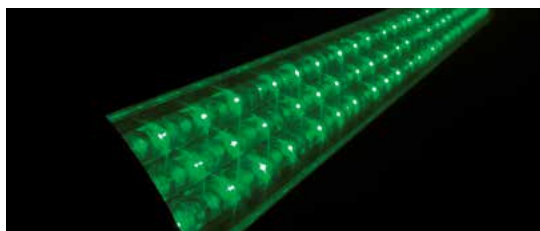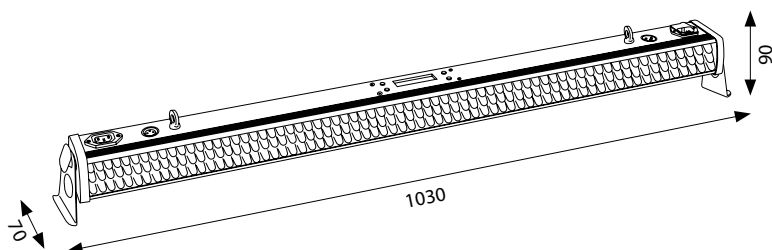

## SG SLIMBAR240 - PRODUCT CODE

### LIGHT SOURCE

- 240 led 10 mm RGB
- LED lifespan: >50.000h
- LED refresh frequency: >400Hz flicker free

### OPTIC SYSTEM

- Beam angle: 30°

### COLOR SYSTEM

- LED source RGB
- Infinite chromatic possibilities and colour temperature control
- 1 color macro can be recalled by DMX

### EFFECTS

- Linear Dimmer 0-100%
- Electronic strobe: 1-20 flashes/s with adjustable speed

### CONTROL AND PROGRAMMING

- 6 DMX configurations available: 3/5/8/14/24/26 channels
- 8-sectors control system
- USITT DMX 512 protocol
- Master / Slave mode
- Sound mode with adjustable mic sensitivity
- Automatic mode with 3 different programs selectable from the display with independent adjustment of the speed
- Color mode with 9 different pre-programmed color macros and 1 adjustable color macro
- IR remote controller included with possibility to recall colors or macros

### STRUCTURE AND CABINET

- Aluminum housing, black color
- Red LED display
- Mounting points: double adjustable brackets
- "Light up" positioning with angle adjustment
- DMX 3-poles XLR In/Out connectors
- IP rating: IP20

### POWER SUPPLY

- Input Voltage: AC~100-240V 50/60Hz
- Switching power supply unit
- Max power: 35W @ 230VAC
- Power In/Out connection with VDE socket
- Power supply cable 1,5 mt included
- Max 12 pcs linkable @240V

### WEIGHT AND DIMENSIONS



- Net weight: 1,6 kg
- Dimensions: 1030x70x90 mm



## SLIMBAR 8 BATTERY



NEW

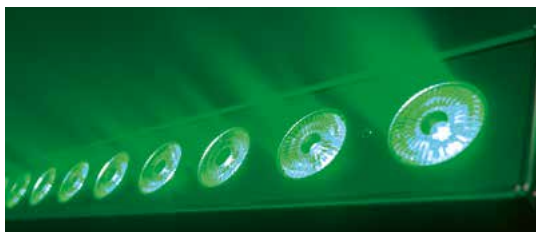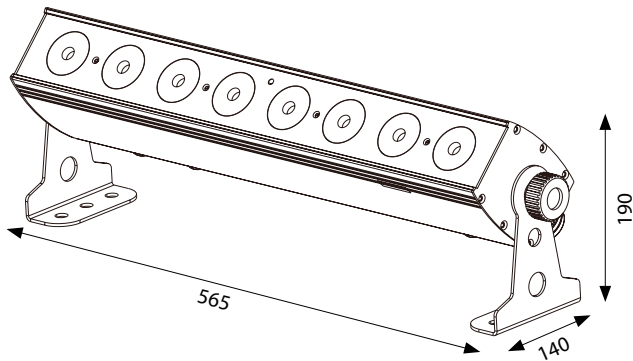
**SG SLIMBAR8BAT - PRODUCT CODE**  
 - CASE (5X SG SLIMBAR8BAT)
**LIGHT SOURCE**

- 8x10W led RGBW Full Color
- LED lifespan: >50.000h
- LED refresh frequency: >400Hz flicker free

**OPTIC SYSTEM**

- Beam angle: 10°x40°

**COLOR SYSTEM**

- LED source 4 in 1 RGBW Full Color
- Infinite chromatic possibilities

**EFFECTS**

- Linear Dimmer 0-100%
- Electronic strobe: 1-20 flashes/s with adjustable speed

**CONTROL AND PROGRAMMING**

- 3 DMX configurations available: 1/4/7 channels
- USITT DMX 512 protocol
- Built-in DMX wireless (DMX wireless transmitter SG AIRBOX, sold separately)
- Master / Slave mode
- Sound mode with 3 different programs and adjustable mic sensitivity
- Static color mode with strobe adjustment
- Automatic mode with 6 different programs selectable from the display with independent adjustment of the speed
- Color mode with 51 different pre-programmed color macros
- IR remote controller included

**STRUCTURE AND CABINET**


- Metal housing, black color
- Blue LCD graphic display
- Mounting points: double adjustable brackets
- "Light up" positioning with angle adjustment
- DMX 3-poles XLR In/Out connectors
- IP rating: IP20
- Convection cooling system without fans

**POWER SUPPLY**

- Input Voltage: AC~100-240V 50/60Hz for normal working and battery recharge
- Switching power supply unit
- Internal rechargeable battery: 12,6VDC
- Capacity: 10 Ah
- Runtime battery: ~ 5 h (full ON)
- Charging cycle: ~ 8 h (Projector off)
- Max Power: 80W @ 230VAC
- Power In/Out connection with powerCON socket
- Power supply cable 1,5 mt included

**WEIGHT AND DIMENSIONS**

- Net weight: 3,6 kg
- Dimensions: 565x140x190

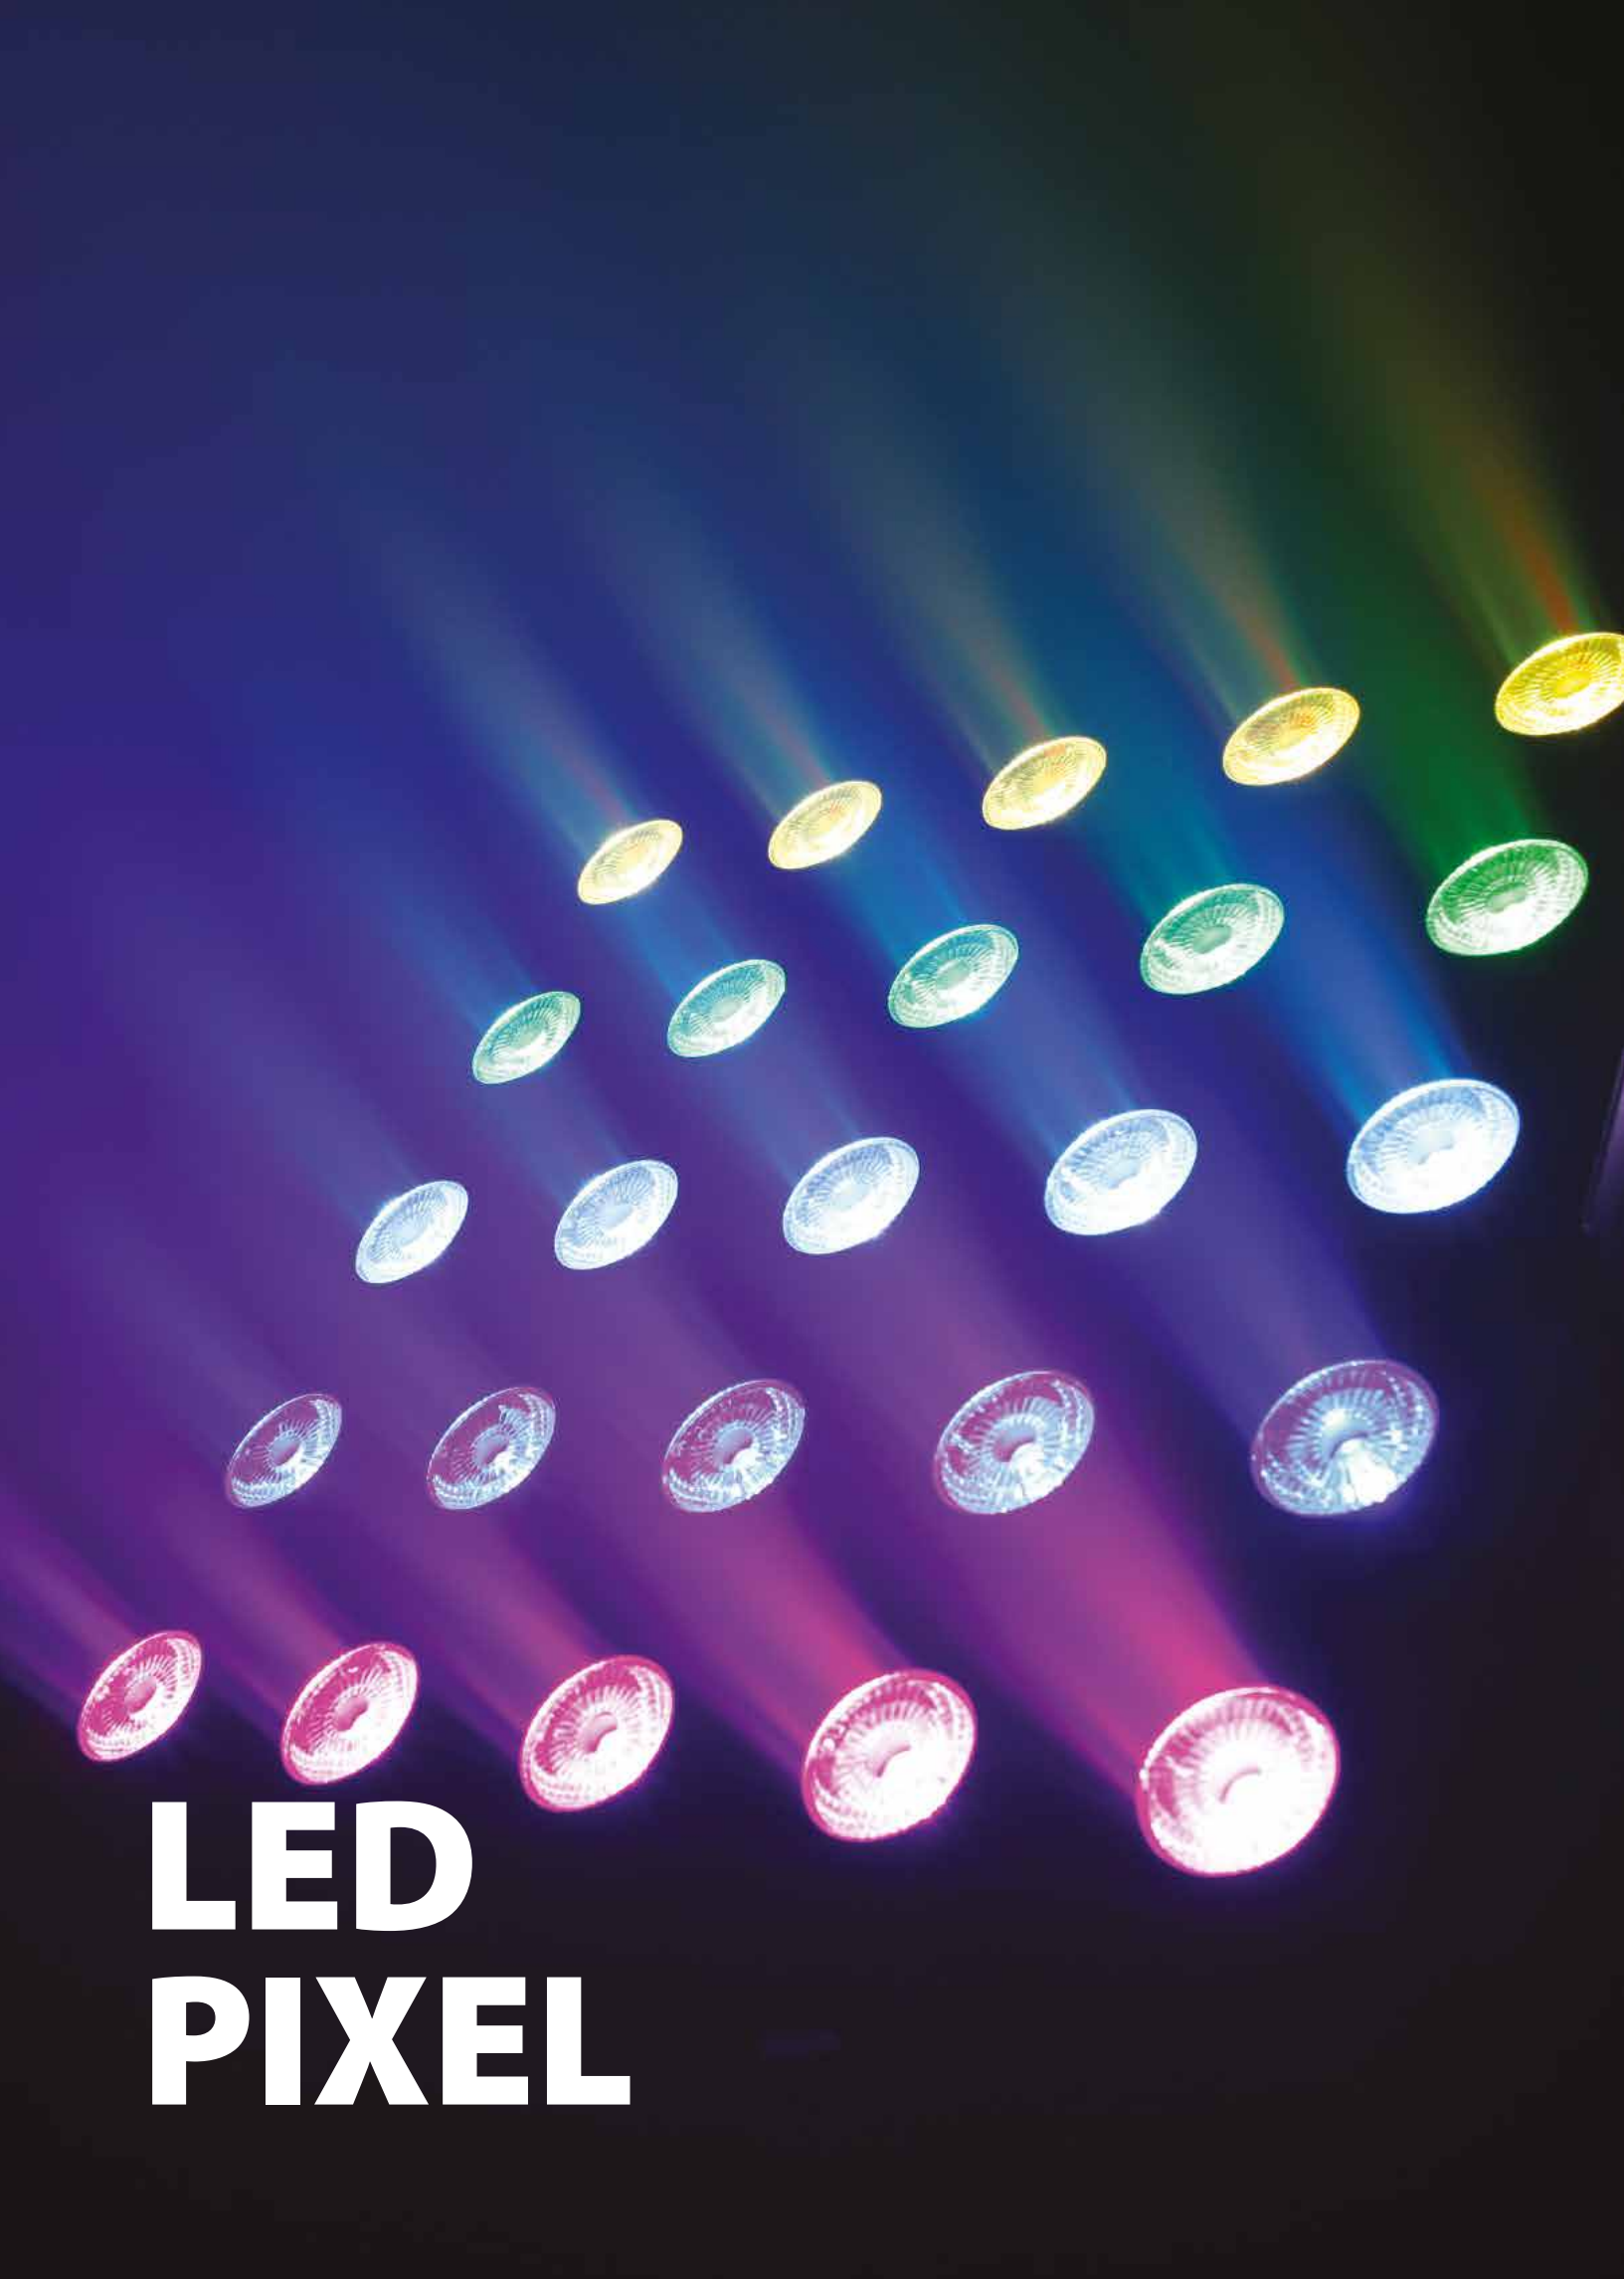

**LED  
PIXEL**

**SG PIXi5 - PRODUCT CODE****SG CASEPIXi5 - CASE (6x SG PIXi5)****LIGHT SOURCE**

- 25x10W led RGBW Full Color
- LED lifespan: >50.000h
- LED refresh frequency: >400Hz flicker free

**OPTIC SYSTEM**

- Beam angle: 15°
- Luminous flux: 2130 lux @5mt (15°)
- DC (dark cover) optical insulation system

**COLOR SYSTEM**

- LED source 4 in 1 RGBW Full Color
- Infinite chromatic possibilities
- Color macros can be recalled by DMX

**EFFECTS**

- Linear Dimmer 0-100%
- Electronic strobe: 1-20 flashes/s with adjustable speed
- Color macros and pixel can be recalled by DMX

**CONTROL AND PROGRAMMING**

- 5 DMX configurations available: 4/6/8/10/100 channels
- Single pixel control
- 3 selectable dimmer curve
- USITT DMX 512 protocol
- Master / Slave mode
- Sound mode with adjustable mic sensitivity
- Static color mode with independent adjustment of strobe
- Automatic mode with 19 different programs selectable from the display with independent adjustment of the speed

**STRUCTURE AND CABINET**


- Aluminum housing, black color
- LCD graphic color display
- Mounting points: double central adjustable bracket
- Specific hardware for connection between panels
- DMX 3-poles XLR In/Out connectors
- IP rating: IP20
- Fan cooling system without fans

**POWER SUPPLY**

- Input Voltage: AC~100-240V 50/60Hz
- Switching power supply unit
- Max power: 280W @ 230VAC
- Power In/Out connection with powerCON socket
- Power supply cable 1,5 mt included
- Max 6 pcs linkable @240V

**WEIGHT AND DIMENSIONS**

- Net weight: 6,8 kg
- Dimensions: 399x113x399 mm

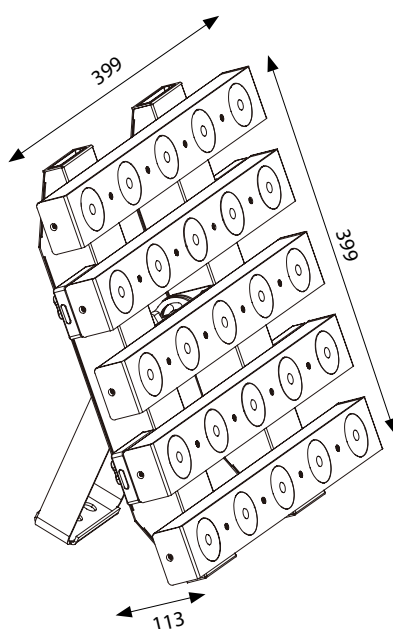





**SG PIX.i5W - PRODUCT CODE**  
**SG CASEPIX.i5 - CASE (6x SGPIX.i5W)**

**LIGHT SOURCE**

- 25x3W CREE XPE led Warm White 2800K
- LED lifespan: >50,000h
- LED refresh frequency: >400Hz flicker free

**OPTIC SYSTEM**

- Beam angle: 5°
- Luminous flux: 7750 lux @5mt (15°)
- DC (dark cover) optical insulation system

**COLOR SYSTEM**

- LED source CREE Warm White 2800K

**EFFECTS**

- Linear Dimmer 0-100%
- Electronic strobe: 1-20 flashes/s with adjustable speed
- Color macros and pixel can be recalled by DMX

**CONTROL AND PROGRAMMING**

- 4 DMX configurations available: 1/2/6/25 channels
- 3 selectable dimmer curves
- Single pixel control
- USITT DMX 512 protocol
- Master / Slave mode
- Sound mode with adjustable mic sensitivity
- Static color mode with independent adjustment of strobe
- Automatic mode with 120 different programs selectable from the display with independent adjustment of the speed

**STRUCTURE AND CABINET**


- Aluminum housing, black color
- LCD graphic color display
- Mounting points: double central adjustable bracket
- Specific hardware for connection between panels
- DMX 3-poles XLR In/Out connectors
- IP rating: IP20
- Fan cooling system without fans

**POWER SUPPLY**

- Input Voltage: AC~100-240V 50/60Hz
- Switching power supply unit
- Max power: 80W @ 230VAC
- Power In/Out connection with powerCON socket
- Power supply cable 1,5 mt included
- Max 8 pcs linkable @240V

**WEIGHT AND DIMENSIONS**

- Net weight: 6,8 kg
- Dimensions: 399x113x399 mm

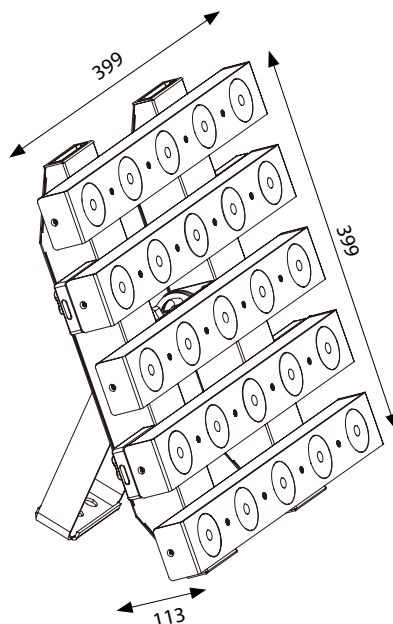





**SG PIX15WL - PRODUCT CODE**  
**SG CASEPIX15WL - CASE (8X SG PIX15WL)**

**LIGHT SOURCE**

- 12x3W CREE XPE led Warm White 2800K
- LED lifespan: >50.000h
- LED refresh frequency: >400Hz flicker free

**OPTIC SYSTEM**

- Beam angle: 5°
- Luminous flux: 3850lux @ 4m
- DC (dark cover) optical insulation system

**COLOR SYSTEM**

- LED source CREE Warm White 2800K

**EFFECTS**

- Linear Dimmer 0-100%
- Electronic strobe: 1-20 flashes/s with adjustable speed
- Color macros and pixel can be recalled by DMX

**CONTROL AND PROGRAMMING**

- 4 DMX configurations available: 2/3/6/12 channels
- 3 selectable dimmer curves
- Single pixel control
- USITT DMX 512 protocol
- Master / Slave mode
- Sound mode with adjustable mic sensitivity
- Static color mode with independent adjustment of strobe
- Automatic mode with independent adjustment of the speed

**STRUCTURE AND CABINET**


- Aluminum housing, black color
- LCD graphic color display
- Mounting points: central bracket
- Specific hardware for connection between panels
- DMX 3-poles XLR In/Out connectors
- IP rating: IP20
- Fan cooling system without fans

**POWER SUPPLY**

- Input Voltage: AC~100-240V 50/60Hz
- Switching power supply unit
- Max power: 40W @ 230VAC
- Power In/Out connection with powerCON socket
- Power supply cable 1,5 mt included
- Max 20 pcs linkable @240V

**WEIGHT AND DIMENSIONS**

- Net weight: 2,5 kg
- Dimensions: 1000x55x142 mm

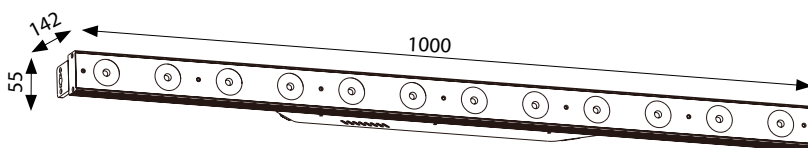



# LED KITS

## LED KIT 3 BATTERY

**SG LEDKITHP3BAT - PRODUCT CODE****LIGHT SOURCE**

- Kit 4 projectors 3x6W led RGBW Full Color
- LED lifespan: > 50.000h

**OPTIC SYSTEM**

- Beam Angle: 25°

**COLOR SYSTEM**

- Led Source 4 in 1 RGBW Full Color
- Infinite chromatic possibilities

**EFFECTS**

- Linear dimmer 0-100%
- Adjustable strobe effect
- Auto mode can be recalled by DMX

**CONTROL AND PROGRAMMING**

- 7 DMX configurations available: 4/5/6/9/10/16/20 channels
- Each projectopr can be controlled independently via DMX
- USITT DMX 512 protocol
- Master/Slave mode
- Sound mode with adjustable microphone sensitivity
- Automatic mode with 6 different programs selectable from the display or footswitch, with adjustment of the speed
- Color mode with 9 different pre-programmed color macros
- Wireless battery footswitch: Blackout, Sound, Auto, Freeze (included)

**STRUCTURE AND CABINET**


- Metal housing, black color
- Red LED display
- Mounting points: double adjustable brackets
- "Light up" positioning
- DMX 3-poles XLR In/Out connectors
- IP rating: IP20
- Stand max. H 2200
- Soft bag for bar for transport included


**POWER SUPPLY**

- Input Voltage: AC~100-240V, 50/60 Hz
- Switching power supply unit
- Max power: 80W @ 230VAC
- Internal Li – ion rechargeable battery
- Runtime battery: ~ 8 hrs (full ON)
- Charging cycle: ~ 5 hrs (led blackout when charging)
- Power supply cable included

**WEIGHT AND DIMENSIONS**

- Bar net weight: 6,3 kg
- Stand net weight: 2,8 kg
- Bar Dimensions: 950x90x230 mm

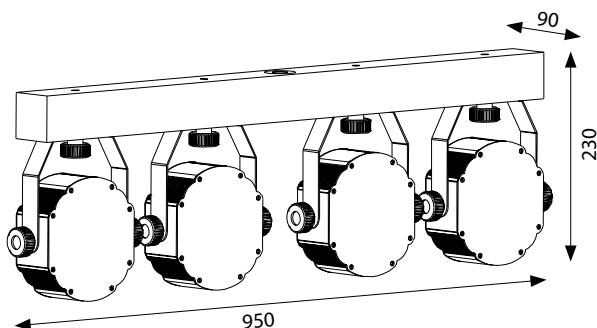

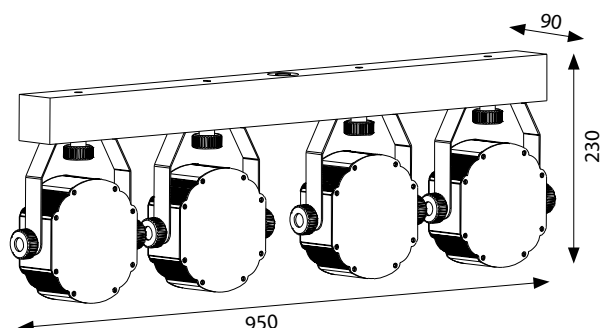**SG LEDKITHP3C - PRODUCT CODE****LIGHT SOURCE**

- Kit 4 projectors 3x6W led RGBW Full Color
- LED lifespan: > 50.000h

**OPTIC SYSTEM**

- Beam Angle: 25°

**COLOR SYSTEM**

- Led Source 4 in 1 RGBW Full Color
- Infinite chromatic possibilities

**EFFECTS**

- Linear dimmer 0-100%
- Adjustable strobe effect
- Auto mode can be recalled by DMX

**CONTROL AND PROGRAMMING**

- 5 DMX configurations available: 4/6/10/16/18 channels
- Each projector can be controlled independently via DMX
- USITT DMX 512 protocol
- Master/Slave mode
- Sound mode with adjustable microphone sensitivity
- Automatic mode with 6 different programs selectable from the display or footswitch, with adjustment of the speed
- Color mode with 9 different pre-programmed color macros
- Footswitch control included: Blackout, Sound, Auto, Freeze

**STRUCTURE AND CABINET**

- Metal housing, black color
- Red LED display
- Mounting points: double adjustable brackets
- "Light up" positioning
- DMX 3-poles XLR In/Out connectors
- IP rating: IP20
- Stand max. H 2200
- Soft bag for bar for transport included

**POWER SUPPLY**

- Input Voltage: AC~100-240V, 50/60 Hz
- Switching power supply unit
- Max power: 80W @ 230VAC
- Power supply cable included

**WEIGHT AND DIMENSIONS**

- Bar net weight: 5,8 kg
- Stand net weight: 2,8 kg
- Bar Dimensions: 950x90x230 mm





## LED KIT 7 BATTERY

**SG LEDKITHP7BAT - PRODUCT CODE****LIGHT SOURCE**

- Kit 4 projectors 7x10W led RGBW Full Color
- LED lifespan: > 50.000h

**OPTIC SYSTEM**

- Beam Angle: 25°

**COLOR SYSTEM**

- Led Source 4 in 1 RGBW Full Color
- Infinite chromatic possibilities

**EFFECTS**

- Linear dimmer 0-100%
- Adjustable strobe effect
- Auto mode can be recalled by DMX

**CONTROL AND PROGRAMMING**

- 7 DMX configurations available: 4/5/6/9/10/16/20 channels
- Each projectopr can be controlled independently via DMX
- USITT DMX 512 protocol
- Master/Slave mode
- Sound mode with adjustable microphone sensitivity
- Automatic mode with 6 different programs selectable from the display or footswitch, with adjustment of the speed
- Color mode with 9 different pre-programmed color macros
- Wireless battery footswitch: Blackout, Sound, Auto, Freeze (included)

**STRUCTURE AND CABINET**


- Metal housing, black color
- Red LED display
- Mounting points: double adjustable brackets
- "Light up" positioning
- DMX 3-poles XLR In/Out connectors
- IP rating: IP20
- Stand max. H 2800
- Soft bag for bar for transport included



**POWER SUPPLY**

- Input Voltage: AC~100-240V, 50/60 Hz
- Switching power supply unit
- Max power: 300W @ 230VAC
- Internal Li – ion rechargeable battery
- Runtime battery: ~ 6 hrs (full ON)
- Charging cycle: ~ 5 hrs (led blackout when charging)
- Power supply cable included

**WEIGHT AND DIMENSIONS**

- Bar net weight: 9,6 kg
- Stand net weight: 4,5 kg
- Bar Dimensions: 1180x90x270 mm

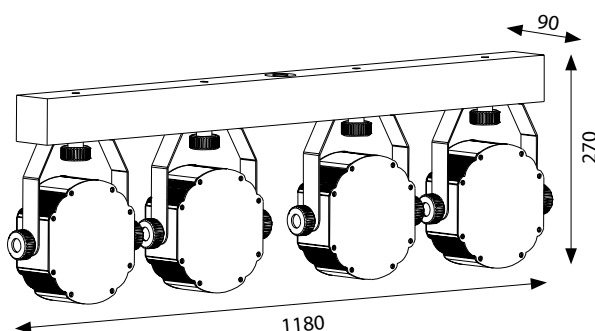

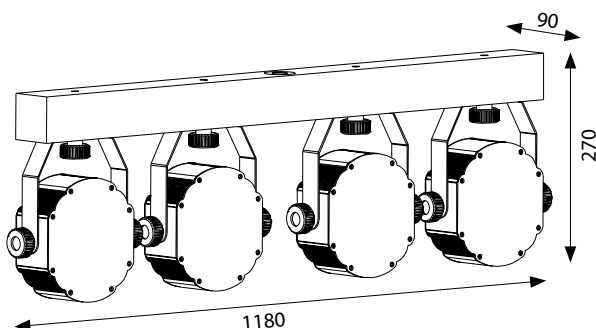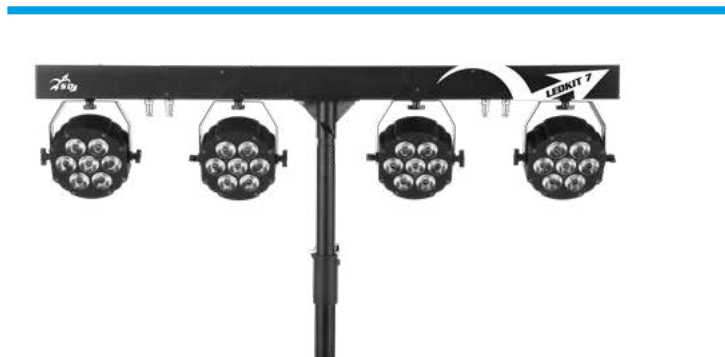**SG LEDKITHP7 - PRODUCT CODE****LIGHT SOURCE**

- Kit 4 projectors 7x10W led RGBW Full Color
- LED lifespan: >50,000h
- LED refresh frequency: >400Hz flicker free

**OPTIC SYSTEM**

- Beam angle: 25°

**COLOR SYSTEM**

- LED source 4 in 1 RGBW Full Color
- Infinite chromatic possibilities and colour temperature control

**EFFECTS**

- Linear Dimmer 0-100%
- Electronic strobe: 1-20 flashes/s with adjustable speed
- 1 Auto mode can be recalled by DMX

**CONTROL AND PROGRAMMING**

- 5 DMX configurations available: 4/6/10/16/18 channels
- Each projector can be controlled independently
- USITT DMX 512 protocol
- Master / Slave mode
- Sound mode with adjustable mic sensitivity
- Automatic mode with 6 different programs selectable from the display or footswitch with independent adjustment of the speed
- Color mode with 9 different pre-programmed color macros + 1 adjustable macro
- Footswitch control included: Blackout, Sound, Auto, Freeze

**STRUCTURE AND CABINET**

- Metal housing, black color
- Red LED display
- Mounting points: double adjustable brackets
- "Light up" positioning
- DMX 3-poles XLR In/Out connectors
- IP rating: IP20
- Stand max. H 2800 mm with bag for transport included
- Semi rigid bag for bar transport included

**POWER SUPPLY**


- Input Voltage: AC~100-240V 50/60Hz
- Switching power supply unit
- Max power: 300W @ 230VAC
- Power In/Out connection with VDE socket
- Power supply cable 1,5 mt included
- Max 4 pcs linkable @240V

**WEIGHT AND DIMENSIONS**


- Bar Net weight: 8,5 kg
- Stand Net weight: 4,5 kg
- Bar Dimensions: 1180x90x270 mm





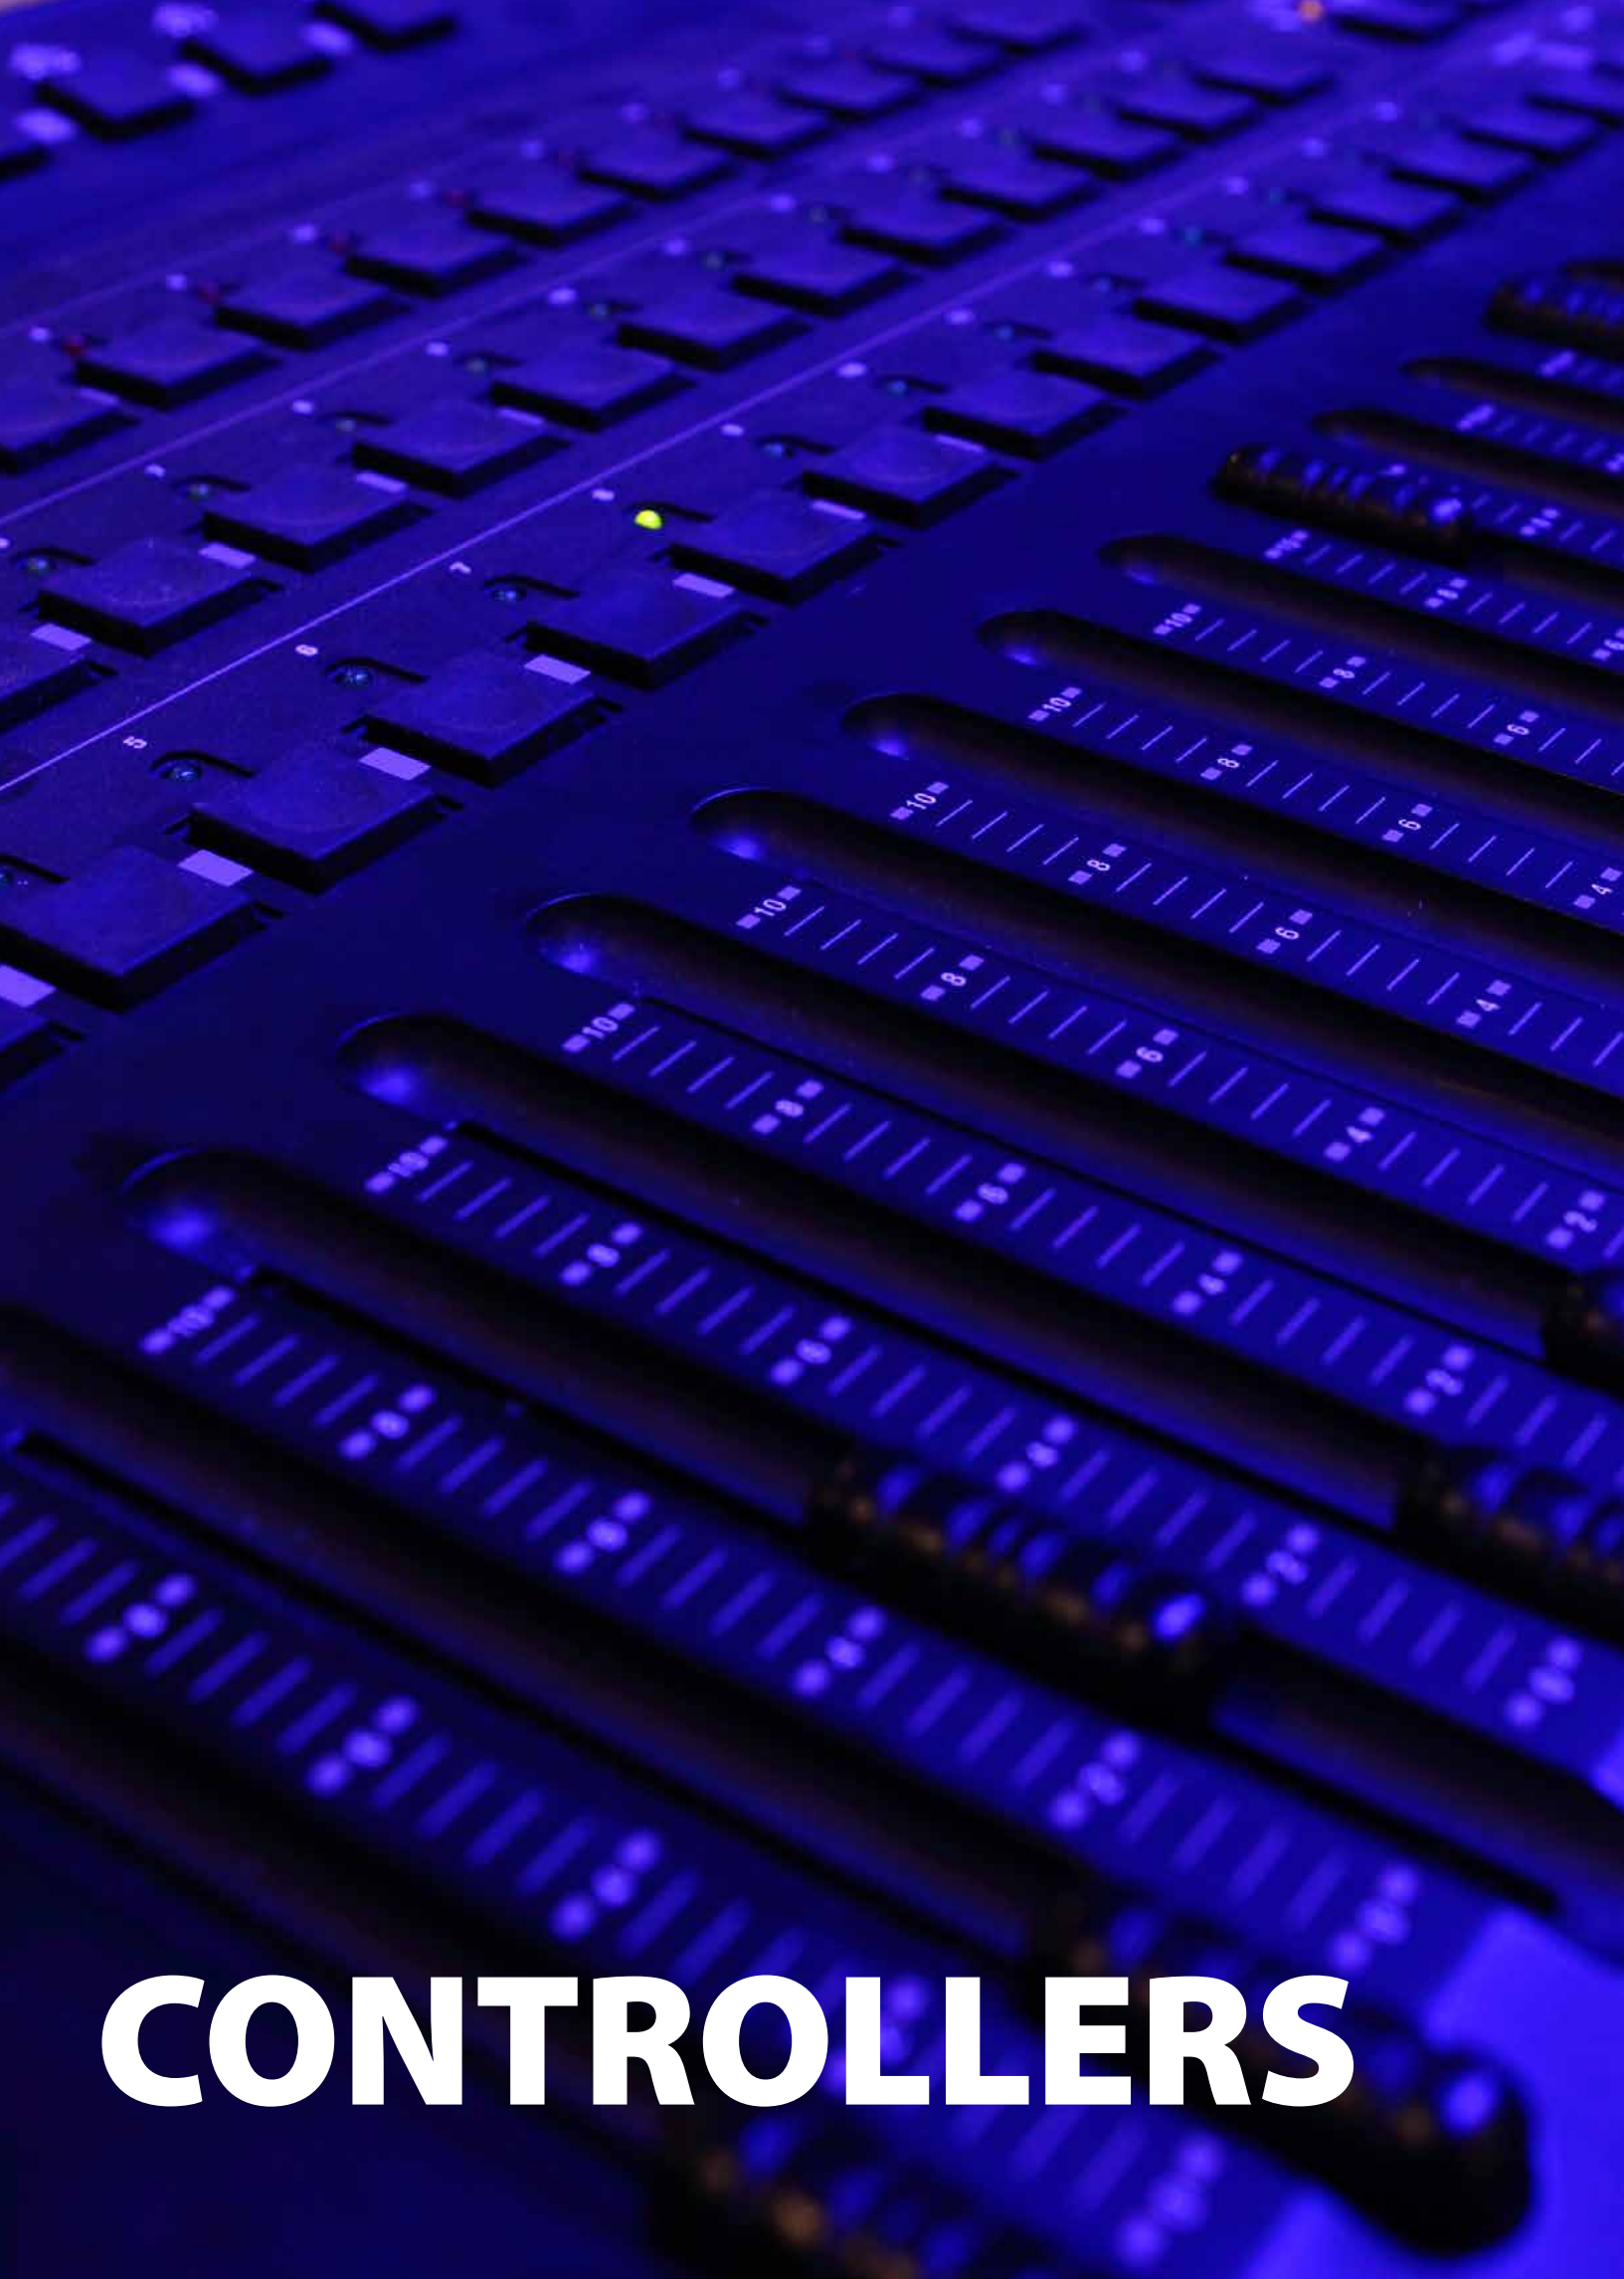

# CONTROLLERS

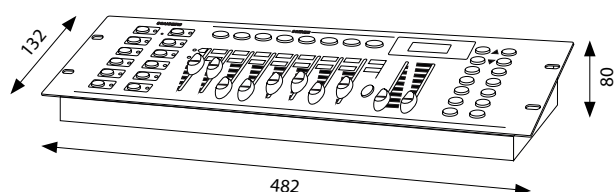

## SG FASTER192N - PRODUCT CODE

### TECHNICAL DATA

- DMX controller
- Max 12 projectors, 16 channel each
- Total 192 DMX channels
- 8 sliders for control (page A/B)
- 8 programmable scenes in 30 banks
- 6 chases
- Auto mode
- Sound mode (internal microphone)

### POWER SUPPLY


- Input Voltage: DC 12V, 300 mA min
- External adapter included: AC~100-240V, 50/60Hz

### WEIGHT AND DIMENSIONS

- Net weight: 2,5 kg
- Dimensions: 482x132x80 mm





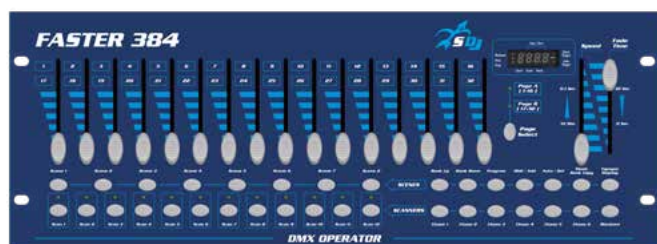

## SG FASTER384 - PRODUCT CODE

### TECHNICAL DATA


- DMX controller
- Max 12 projectors, 32 channels each
- Total 384 DMX channels
- 8 sliders for control (page A/B)
- 8 programmable scenes in 30 banks
- 6 chases
- Auto mode
- Sound mode (internal microphone)


### POWER SUPPLY

- Input Voltage: DC 12V, 300 mA min
- External adapter included: AC~100-240V, 50/60Hz

### WEIGHT AND DIMENSIONS

- Net weight: 2,5 kg
- Dimensions: 482x132x80 mm

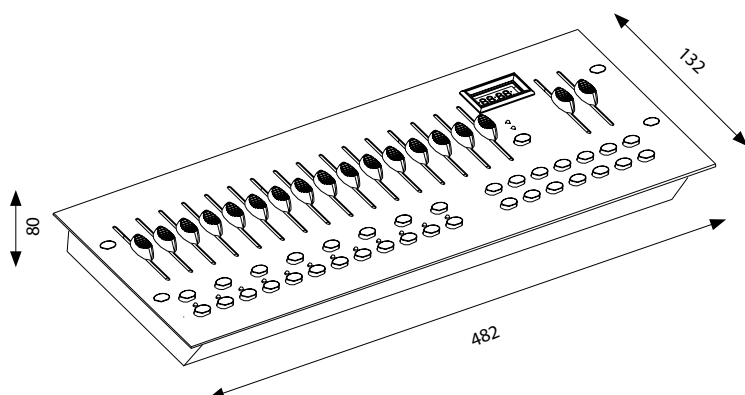

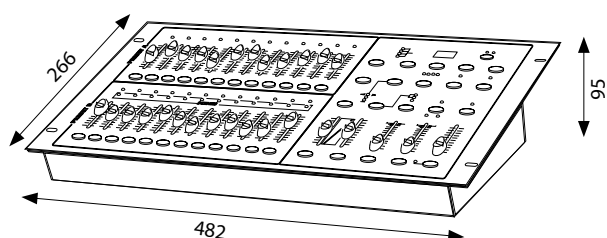

## SG FASTER1224 - PRODUCT CODE

### TECHNICAL DATA

- Controller for traditional projectors
- 24 DMX channels in total
- 24 control sliders
- 4 pages for 12 programs ( up to 4.600 programmable steps)
- Fader setting and high speed execution for every single scene
- Possibility of edit a scene live or deferred
- Music mode (internal microphone)
- Compatible MIDI In/Out
- DMX polarity selector
- Sound-activated: Input audio



### POWER SUPPLY

- Input Voltage: DC 12V, 500mA min
- External adapter included AC~100-240V, 50/60Hz

### WEIGHT AND DIMENSION

- Net weight: 4,4 kg
- Dimensions: 482x266x95 mm



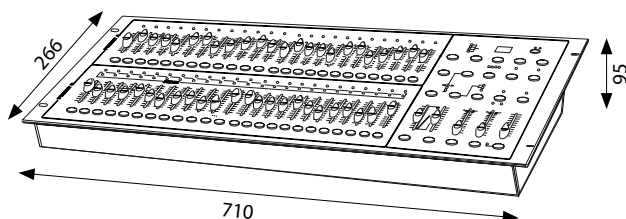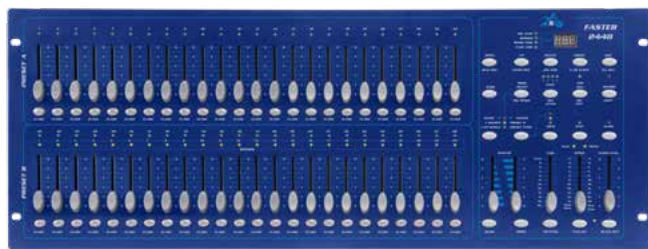

## SG FASTER2448 - PRODUCT CODE

### TECHNICAL DATA

- Controller for traditional projectors
- 48 DMX channels in total
- 48 control sliders
- 4 pages for 12 programs ( up to 4.600 programmable steps)
- Fader setting and high speed execution for every single scene
- Possibility of edit a scene live or deferred
- Music mode (internal microphone)
- Compatible MIDI In/Out
- DMX polarity selector
- Sound-activated: Input audio

### POWER SUPPLY

- Input Voltage: DC 12V, 500mA min
- External adapter included AC~100-240V, 50/60Hz

### WEIGHT AND DIMENSION



- Net weight: 4,4 kg
- Dimensions: 482x266x95 mm







NEW

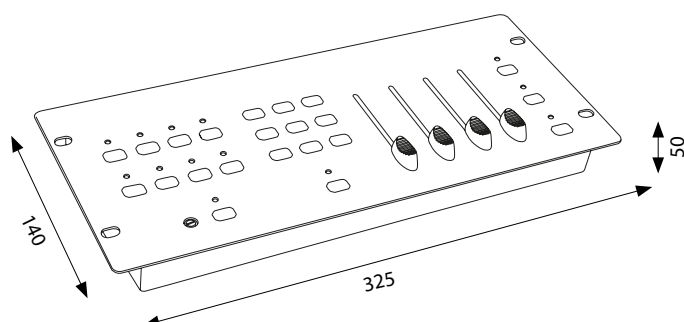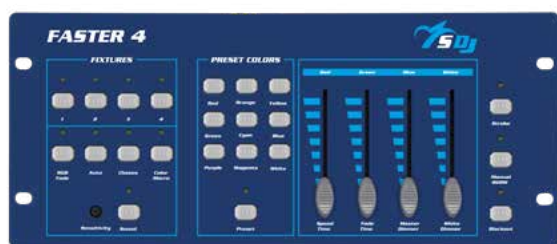

## SG FASTER4 - PRODUCT CODE

### TECHNICAL DATA

- DMX controller
- Max 4 projectors, 4 channel each
- Total 16 DMX channels
- 4 buttons for fixtures selection
- 4 faders for fixtures and effects control
- 4 buttons for Chases and Macro control
- RGB fade effects
- Automatic effects
- Color Macro effects
- 9 Chases color effects
- Strobe effect control
- Sound mode (internal microphone with adjustable sensitivity)

### POWER SUPPLY

- Input Voltage: DC 9-12V, 500 mA min
- External adapter included: AC~100-240V, 50/60Hz

### WEIGHT AND DIMENSIONS

- Net weight: 1,4 kg
- Dimensions: 325x140x50 mm







NEW



## SG FASTER6 - PRODUCT CODE

### TECHNICAL DATA


- DMX controller
- Total 6 DMX channels from CH1 to CH6
- 6 faders for fixtures control
- 9V battery NOT RECHARGEABLE (not included)

### POWER SUPPLY

- Input Voltage: DC 9-12V, 500 mA min
- External adapter included: AC~100-240V, 50/60Hz

### WEIGHT AND DIMENSIONS

- Net weight: 0,7 kg
- Dimensions: 155x170x45 mm

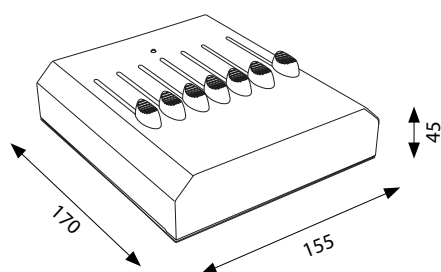



NEW



## SG FASTERSP8 - PRODUCT CODE

### TECHNICAL DATA


- 1 input - 8 output DMX512
- Opto-insulated Input and Outputs signals
- 1 DMX Input XLR 3-poles
- 1 DMX Input XLR 5-poles
- 8 DMX Outputs XLR 3-poles
- 1 DMX Thru XLR 3-poles for connection to another distributor
- 1 DMX Thru XLR 5-poles for connection to another distributor
- 1 Standard rack 19" unit

### POWER SUPPLY

- AC~100-240V - 50/60Hz
- Power In connection with powerCON socket

### WEIGHT AND DIMENSIONS

- Net weight: 2,0 kg
- Dimensions: 480x150x50 mm

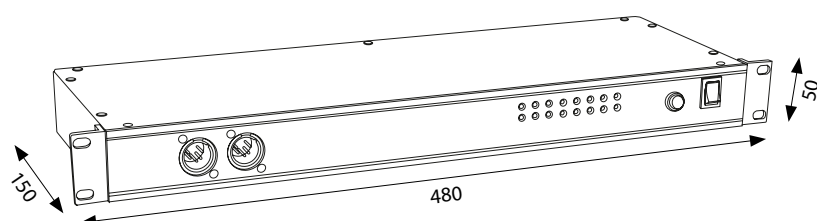

# AMBIENT EFFECTS





## SG H300 - PRODUCT CODE

### EFFECTS

- Hazer effect

### CONTROL AND PROGRAMMING

- 1 DMX channel configuration: 2 channels
- Fan's speed adjustable via software and via DMX
- USITT DMX 512 protocol
- Radio remote controller included
- Automatic safety shutdown circuit for pump prevention in case of finished liquid in the circuit
- Heating time: 2 mins
- Smoke output: 1000cuft
- Continue output
- Manual mode adjustable via display

### STRUCTURE AND CABINET


- Metal housing, black color
- Red LED display
- Comfortable handle for transportation
- Led indicator for heating and ready to smoke
- High performance pump for optimal emission
- High speed axial fan
- External tank: 1,2 litres
- DMX 3-poles XLR In/Out connectors
- IP rating: IP20
- For best applications and correct function we recommend using Sagitter fluids

### POWER SUPPLY

- Input Voltage: AC~230V 50Hz
- Max power: 650 W @ 230VAC
- Power IN connection with VDE sockets
- Power supply cable 1,5 mt included

### WEIGHT AND DIMENSIONS

- Net weight: 8 kg
- Dimensions: 235x355x200 mm

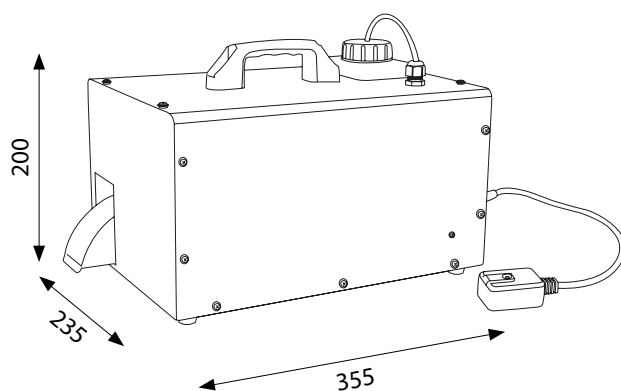





## SG HYH900 - PRODUCT CODE

### EFFECTS

- Hazer/smoke effect

### CONTROL AND PROGRAMMING

- 1 DMX channels configuration: 2 channels
- Fan's speed adjustable via software and via DMX
- USITT DMX 512 protocol
- Heating time: 5 mins
- Continue output
- Manual mode adjustable via display

### STRUCTURE AND CABINET


- Metal housing, black color
- LCD blue graphic display
- Comfortable handle for transportation
- High performance pump for optimal emission
- High speed axial fan
- External tank: 2 litres
- DMX 3/5-poles XLR In/Out connectors
- IP rating: IP20
- For best applications and correct function we recommend using Sagitter fluids

### POWER SUPPLY

- Input Voltage: AC~230V 50Hz
- Max power: 900W @ 230VAC
- Power IN connection with VDE sockets
- Power supply cable 1,5 mt included

### WEIGHT AND DIMENSIONS

- Net weight: 10,4 kg
- Dimensions: 425x480x330 mm

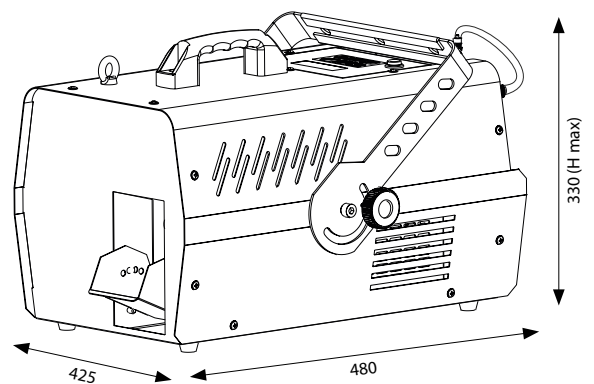



NEW

## SG HS200 - PRODUCT CODE

### EFFECTS

- Hazer effect

### CONTROL AND PROGRAMMING

- 1 DMX channel configuration: 1 channel
- USITT DMX 512 protocol
- Radio remote controller included
- Heating time: 2 mins
- Smoke output: 800cuft
- Continue output
- Manual mode adjustable via display

### STRUCTURE AND CABINET


- Metal housing, black color
- Red LED display
- Led indicator for heating and ready to smoke
- High performance pump for optimal emission
- High speed fan
- External tank: 2 litres
- DMX 3-poles XLR In/Out connectors
- IP rating: IP20
- For best applications and correct function we recommend using Sagitter fluids

### POWER SUPPLY

- Input Voltage: AC~230V, 50Hz
- Max Power: 480W @ 230VAC
- Power IN connection with VDE sockets
- Power supply cable 1,5 mt included

### WEIGHT AND DIMENSIONS

- Net weight: 4,7 kg
- Dimensions: 357x231x304 mm

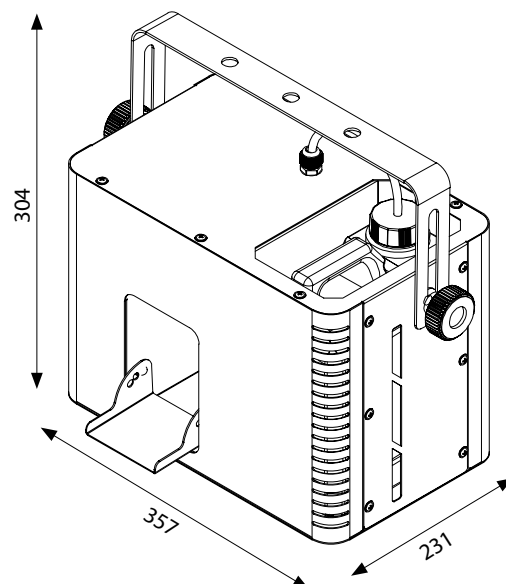



## SG MIMETIKM - PRODUCT CODE

### EFFECTS

- Smoke effect

### CONTROL AND PROGRAMMING

- Radio remote controller included
- Wired remote controller with built-in timer
- Heating time: 5 min
- Continue output time: 20 sec.

### STRUCTURE AND CABINET


- Metal housing, black/green color
- Adjustable bracket
- Led indicator for heating and ready to smoke
- High performance pump for long-range
- External tank: 0,9 litres
- IP rating: IP20
- For best applications and correct function we recommend using Sagitter fluids

### POWER SUPPLY

- Input Voltage: AC~230V, 50 Hz
- Max power: 900W @ 230VAC

### WEIGHT AND DIMENSIONS

- Net weight: 4,5 kg
- Dimensions: 235x240x140 mm

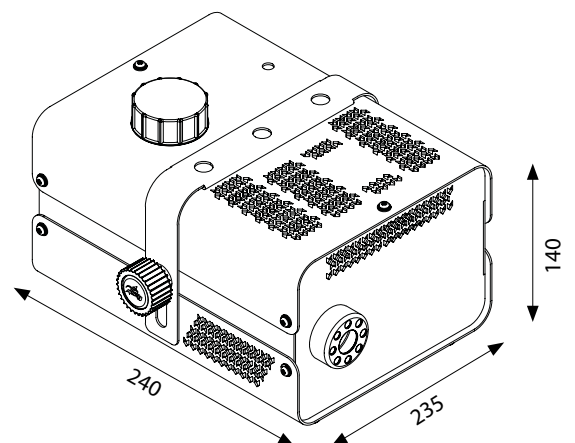



## SG MIMETIKXL - PRODUCT CODE

### EFFECTS

- Smoke effect

### CONTROL AND PROGRAMMING

- USITT DMX 512 protocol
- Radio remote controller included
- Manual mode with specific button
- Heating time: 8 mins
- Continue output time: 10s

### STRUCTURE AND CABINET


- Metal housing, black/green color
- Comfortable handle for transportation
- Red led indicator for heating and ready to smoke
- High performance pump for long-range
- External tank: 2,5 litres
- DMX 3-poles XLR In/Out connectors
- IP rating: IP20
- For best applications and correct function we recommend using Sagitter fluids

### POWER SUPPLY

- Input Voltage: AC~230V 50Hz
- Max power: 1500W @ 230VAC
- Power IN connection with VDE sockets
- Power supply cable 1,5 mt included

### WEIGHT AND DIMENSIONS

- Net weight: 7,3 kg
- Dimensions: 190x440x305 mm

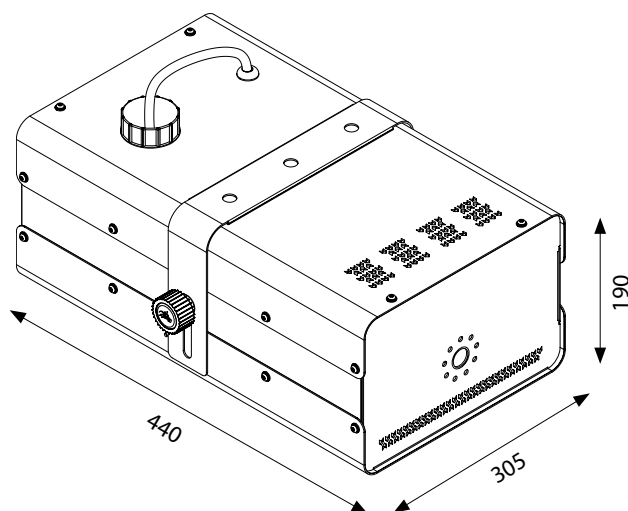





## SG ARS1500FC - PRODUCT CODE

### EFFECTS

- Smoke effect
- Geyser smoke effect 6 LED RGB full color

### CONTROL AND PROGRAMMING

- 1 DMX configurations available: 7 channels
- Independent control smoke output and leds
- USITT DMX 512 protocol
- Radio remote controller included
- Auto mode with 7 pre-programmed colors
- Manual mode with specific button
- Automatic safety shutdown circuit for pump prevention in case of finished liquid in the circuit
- Heating time: 5 min
- Continue output time: 10 sec.

### STRUCTURE AND CABINET



- Metal housing, black color
- Red LED display
- Comfortable handle for transportation
- Led indicator for heating and ready to smoke
- High performance pump for long-range smoke jet
- Auxiliary pump for instant smoke stop
- Double working mode: horizontal and vertical
- External tank: 2,5 litres
- DMX 3-5 poles XLR In/Out connectors
- IP rating: IP20
- For best applications and correct function we recommend using Sagitter fluids

### POWER SUPPLY

- Input Voltage: AC~230V, 50 Hz
- Max power: 1600W @ 230VAC
- Power IN connection with VDE sockets
- Power supply cable 1mt included

### WEIGHT AND DIMENSIONS

- Net weight: 8,5 kg
- Dimensions: 415x358x225 mm

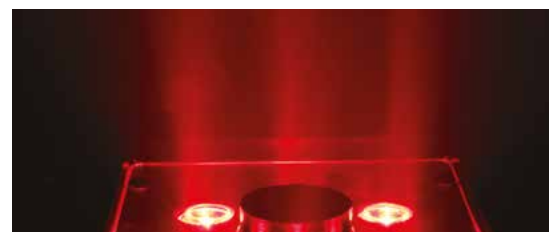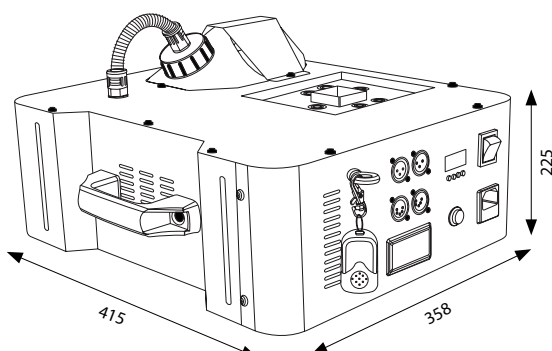



## SG ARS900FC - PRODUCT CODE

### EFFECTS

- Smoke effect
- Geyser smoke effect 6 LED RGB full color

### CONTROL AND PROGRAMMING

- 1 DMX configurations available: 7 channels
- Independent control smoke output and leds
- USITT DMX 512 protocol
- Radio remote controller included
- Auto mode with 7 pre-programmed colors
- Manual mode with specific button
- Automatic safety shutdown circuit for pump prevention in case of finished liquid in the circuit
- Heating time: 5 min
- Continue output time: 10 sec.

### STRUCTURE AND CABINET



- Metal housing, black color
- Red LED display
- Comfortable handle for transportation
- Led indicator for heating and ready to smoke
- High performance pump for long-range smoke jet
- Auxiliary pump for instant smoke stop
- Double working mode: horizontal and vertical
- External tank: 2,5 litres
- DMX 3-poles XLR In/Out connectors
- IP rating: IP20
- For best applications and correct function we recommend using Sagitter fluids

### POWER SUPPLY

- Input Voltage: AC~230V, 50 Hz
- Max power: 950wW @ 230VAC
- Power IN connection with VDE sockets
- Power supply cable 1mt included

### WEIGHT AND DIMENSIONS

- Net weight: 7 kg
- Dimensions: 408x264x192 mm

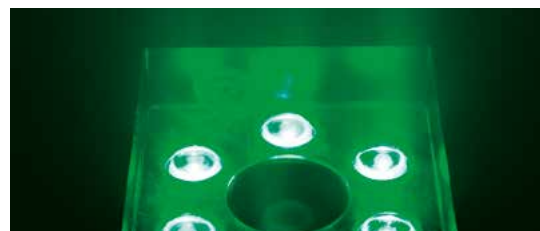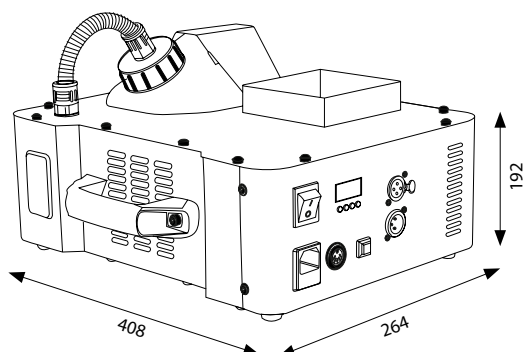



## SG ARS900DJ - PRODUCT CODE

### EFFECTS

- Smoke effect
- Geyser smoke effect 3 LED RGB full color

### CONTROL AND PROGRAMMING

- Radio remote controller included
- Static color mode: 7 built-in colors
- Auto mode: 1 built-in color change program
- Manual mode with specific button
- Heating time: 8 min
- Continue output time: 10 sec.

### STRUCTURE AND CABINET


- Metal housing, black color
- Comfortable handle for transportation
- Led indicator for heating and ready to smoke
- High performance pump for long-range smoke jet
- Double working mode: horizontal and vertical
- External tank: 0,25 litres
- IP rating: IP20
- For best applications and correct function we recommend using Sagitter fluids

### POWER SUPPLY

- Input Voltage: AC~230V, 50 Hz
- Max power: 900W @ 230VAC
- Power IN connection with VDE sockets
- Power supply cable 1mt included

### WEIGHT AND DIMENSIONS

- Net weight: 3,5 kg
- Dimensions: 280x245x140 mm

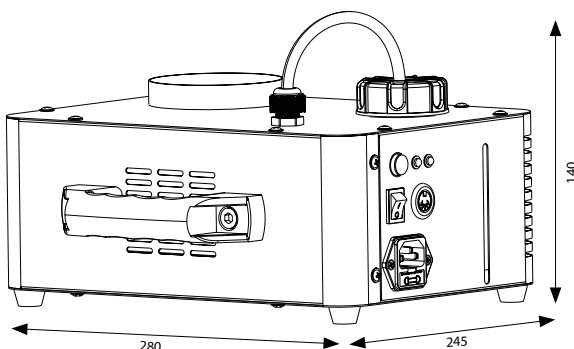





**SAGITTER**  
genuine  
**ACCESSORIES**



# ACCESSORIES

## PRO FLUIDS



### LIGHT

Light version, suitable for small environments and 'occasional' users who want to get a nice smoke effect minimizing the expenses. This version can also be used for those who need a fast fading effect. 5 liters tank

- SG SMKFLD5L

### MEDIUM

Version that provides an adequate coverage and durability for any kind of show, suitable for any location, i.e. live events, theaters and nightclubs. 5 liters tank

- SG SMKFLD5M

### HIGH DENSITY

Condensed version which guarantees a long durability and an adequate coverage for a professional and covering smoke effect. 5 liters tank

- SG SMKFLD5D



### HAZER

Condensed version which guarantees a long durability and an adequate coverage for a professional and covering smoke effect. 5 liters tank

- SG HZRFLD5



### QUICK DISSIPATION

Quick dissipation version, this liquid guarantees intensity and fading similar to a CO2 gas effect. 5 liter tank

- SG SMKFLD5QD

# ACCESSORIES

# LAMPS

CODE	OSRAM	W	V	SOCKET	LIFETIME (H)	LM	PHILIPS	GE	NAED	ANSI	LIF
DOUBLEPLUG HALOGEN											
PLLP300M38	64662	300	230	GY9,5	2000	5000	6874P	M38-39785			M/38
PLLP500M40	64672	500	230	GY9,5	2000	8500	6877P	M40-39621			M/40
PLLP1000T19	64744	1000	230	GX9,5	750	20500	6996P	T19FWP-39657		FWP	T/19
PLLP200016	64788	2000	230	GY16	400	52000	6994P				CP/72
PLLP575HTC	93728	575	230	G9,5	300	14900		HPL575-37128	54618		
PLLP750HTC	93729	750	230	G9,5	300	19750		HPL750-37824			
PAR 36											
PLLPP36V		30	6	screw	100	55000		4515-24673			
PLLPDWE		650	120	screw	100	24000		DWE-41667			
PAR 56											
PLLPP56V		300	230	GX16d	2000	10000			300PAR56\NSP		
PAR 64											
PLLPP645V		500	230	GX16d	300			CP87-30283			CP/87
PLLPP64A		1000	230	GX16d	300	320000	PAR64NSP	CP60EXC-19909	56332	EXC	CP/60
PLLPP64B		1000	230	GX16d	300	270000	PAR64SP	CP61EXD-19911	56233	EXD	CP/61
PLLPP64C		1000	230	GX16d	300	125000	PAR64FL	CP62EXE-19913	56234	EXE	CP/62
PLLP6428V		250	28	screw	25			4552-VNSP			

CODE	OSRAM	W	V	SOCKET	LIFETIME (H)	LM	PHILIPS	GE	NAED	ANSI	LIF
Made in China											
DISCHARGE HMI SERIES											
PLLPHMI575CN	HMI 575W/GS	575	VG	SFc 10-4	nd	nd	MSI 575W	CSR575/DE			
DISCHARGE HSD SERIES											
PLLPHSD250CN	HSD 250	250	VG	GY9,5	nd	nd	MSD 250	CSD 250			
DISCHARGE HSR/MSR SERIES											
PLLPHSR575CN	HSR 575/60	575	VG	GX9,5	nd	nd	MSR 575	CSR 575			

ACCESSORIES

LAMPS

CODE	OSRAM	W	V	SOCKET	LIFETIME (H)	LM	PHILIPS	GE	NAED	ANSI	LIF
WOOD TUBE											
PLLP18W		18	VG	G13	9000		TLD18W/08	F20T12/BLB			
PLLP36W		36	VG	G13	20000		TLD36W/08	F40T12/BLB			
STROBE HIGH POWER											
PLLPXOP15N		1000	VS	CAP15,8,14,7cab	250	350000	XOP15-OF				
DISCHARGE HMI SERIES											
PLLPHMI575GS	HMI 575W/GS	575	VG	SFc 10-4	1000	49000	MSI 575W	CSR575/DE			
PLLPHMI1200GS	HMI 1200W/GS	1200	VG	SFc 15,5-6	1000	110000	MSI 1200W	CSR1200/DE			
DISCHARGE HSD SERIES											
PLLPHSD250	HSD 250	250	VG	GY9,5	2000	17000	MSD 250				
DISCHARGE HSR/MSR SERIES											
PLLPHSR575	HSR 575/60	575	VG	GX9,5	1000	49000					
PLLPMSR1200SA		1200	VG	GY22	750	96000	MSR 1200SA	CSR1200SA			
DISCHARGE REFLECTOR SERIES											
SG LTUHP190W		190/160		2 terminations			UHP 160/190W 0.9 E20.9				
SG LTUHP200W		200/170		2 terminations			TOP UHP 200/170W				
SG LTVIP280W	P-VIP 280/1.0 E20.6	280		2 terminations							
SG PLHRI230	SIRIUS HRI 230W	230		2 terminations	2500						
SG PLHRI280	SIRIUS HRI 280W	280		2 terminations	2000						
SG PLHRI132	SIRIUS HRI 132W	132		2 terminations	6000						
SG PLHRI100	SIRIUS HRI 100W	100		2 terminations	6000						
DISCHARGE FASTFIT SERIES											
SG PL300LK		300		PGJX28	750	23000	MSR Gold 300/2 Mini FastFit1CT/4				
SG PL700LK		700		PGJX50	750	50000	MSR Gold 700/2 FastFit 1CT/8				
SG PL700LK28		700		PGJX28	750	47000	MSR Gold 700/2 Mini FastFit 1CT/4				

# ACCESSORIES

## SAGITTER DMX CABLES



### DMX CABLE 3-poles

Professional DMX cable made in Italy with Neutrik connections series XX XLR 3-poles.  
Composition: 1x NC3FXXBAG 1x SG DMXBK 1x NC3MXXBAG. Cable color: Black

- SG DMX3PLU01 - 1 mt.
- SG DMX3PLU02 - 2 mt.
- SG DMX3PLU03 - 3 mt.
- SG DMX3PLU05 - 5 mt.
- SG DMX3PLU10 - 10 mt.
- SG DMX3PLU15 - 15 mt.
- SG DMX3PLU20 - 20 mt.

### DMX CABLE 5-poles

Professional DMX cable made in Italy with Neutrik connections series XX XLR 5-poles.  
Composition: 1x NC5FXXBAG 1x SG DMXBK 1x NC5MXXBAG. Cable color: Black

- SG DMX5PLU01 - 1 mt.
- SG DMX5PLU02 - 2 mt.
- SG DMX5PLU03 - 3 mt.
- SG DMX5PLU05 - 5 mt.
- SG DMX5PLU10 - 10 mt.
- SG DMX5PLU15 - 15 mt.
- SG DMX5PLU20 - 20 mt.



## SDJ DMX CABLES

### DMX CABLE 3-poles

Professional DMX 512 cable with YONGSCHENG connectors XLR 3-poles.  
Cable color: Black

- SG DMX3CLU02 - 2 mt.
- SG DMX3CLU03 - 3 mt.
- SG DMX3CLU05 - 5 mt.
- SG DMX3CLU010 - 10 mt.

### DMX CABLE 5-poles

Professional DMX 512 cable with YONGSCHENG connectors XLR 5-poles.  
Cable color: Black

- SG DMX5CLU02 - 2 mt.
- SG DMX5CLU03 - 3 mt.
- SG DMX5CLU05 - 5 mt.
- SG DMX5CLU010 - 10 mt.





# ACCESSORIES

# CABLES

POWERCON EXTENSION CABLES	
SDC775LU015	Powercon cable 3x2,5mm 1,5 mt
SDC775LU025	Powercon cable 3x2,5mm 2,5 mt
SDC775LU05	Powercon cable 3x2,5mm 5 mt
SDC775LU10	Powercon cable 3x2,5mm 10 mt
SM300LU5	Power cable mounth EC female socket - SCHIUKO 3x1mm 5mt
SM300LU10	Power cable mounth EC female socket - SCHIUKO 3x1mm 10mt
SM300LU15	Power cable mounth EC female socket - SCHIUKO 3x1mm 15mt
IP DMX EXTENSION CABLES FOR IP LED SERIES	
SG IPCDLU3	DMX cable IP 65 3 mt
SG IPCDLU05	DMX cable IP 65 5 mt
SG IPCDLU10	DMX cable IP 65 10 mt
IP POWER EXTENSION CABLES FOR IP LED SERIES	
SG IPCPLU3	Power cable IP 65 3 mt
SG IPCPLU5	Power cable IP 65 5 mt
SG IPCPLU10	Power cable IP 65 10 mt
IP DMX/POWER EXTENSION CABLES FOR MICRO BAR LED SERIES	
SG IPCPDLU3	Power/DMX cable IP 65 3 mt for IPLED MICRO BAR RGB
SG IPCPDLU5	Power/DMX cable IP 65 5 mt for IPLED MICRO BAR RGB
SG IPCPDLU10	Power/DMX cable IP 65 10 mt for IPLED MICRO BAR RGB

# ACCESSORIES

# CABLECROSS

## SG CABLECRS2 - PRODUCT CODE

### TECHNICAL DATA


- 2 ways cable cross
- Conduits for cable routing up to 30 mm section
- Base made of thermoplastic polyurethane
- Closing panel: made of yellow PVC
- Capacity:  $\leq 3000$  kg (uniformly distributed load)
- Conduits measures: 1000x30x30 mm
- Platform measures: 1000x45x250 mm
- Weight: 4.0 kg



## SG CABLECRS5 - PRODUCT CODE

### TECHNICAL DATA

- 5 ways cable cross
- Conduits for cable routing up to 35 mm section
- Base made of thermoplastic polyurethane
- Closing panel: made of yellow PVC
- Capacity:  $\leq 4500$  kg (uniformly distributed load)
- Conduits measures: 4x(1000x35x40 mm) / 1x(1000x40x40 mm)
- Platform measures: 1000x500x55 mm
- Weight: 9.0 kg

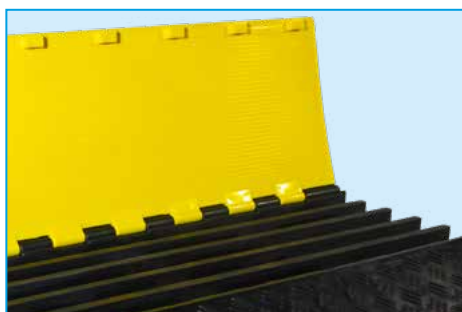

# ACCESSORIES

# CABLECROSS

## SG CABLECVR1S - PRODUCT CODE

### TECHNICAL DATA

- 1 way cable cross
- Conduits for cable routing up to 30 mm section
- Cable cross made of thermoplastic polyurethane
- Capacity:  $\leq 1000$  kg (uniformly distributed load)
- Conduits measures: 1000x40x13 mm
- Platform measures: 1000x135x25 mm
- Weight: 2.0 kg



## SG CABLECVR1XS - PRODUCT CODE

### TECHNICAL DATA

- 1 way cable cross
- Conduits for cable routing up to 6.4mm section
- Cable cross made of PVC and NBR
- Capacity:  $\leq 200$  kg (uniformly distributed load) per 9 mt.
- Conduits measures: 9000x19x9.5 mm
- Platform measures: 9000x77x16 mm
- Weight: 7.0 kg



# ACCESSORIES

## CLAMPS



**PLH290BK**

Black Simple extruded aluminium coupler



**PLH295BK**

Black Simple extruded aluminium coupler



**PLH10NBK**

Black Galvanized steel hook clamp



**PLH350BK**

Black Simple extruded aluminium coupler



**PLH232  
PLH248**

Security PVC covered galvanized stainless steel cable with snap hook.



**PLH10N**

Galvanized steel hook clamp



**PLH270**

Simple extruded aluminium coupler



**PLH290**

Simple extruded aluminium coupler



**PLH295**

Simple extruded aluminium coupler



**PLH300**

Simple extruded aluminium coupler



**PLH340**

Accoppiatore in robusto alluminio 6061 T6 estruso.



**PLH420**

Staffa zincata regolabile per truss con doppio accoppiatore singolo.






# PLATFORMS MODULA SERIES




# PLATFORMS

# MODULA SERIES

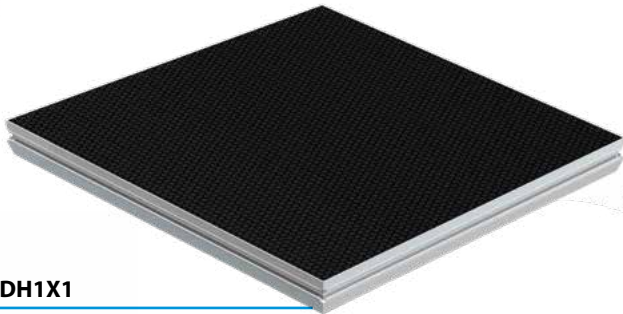

MODH1X1

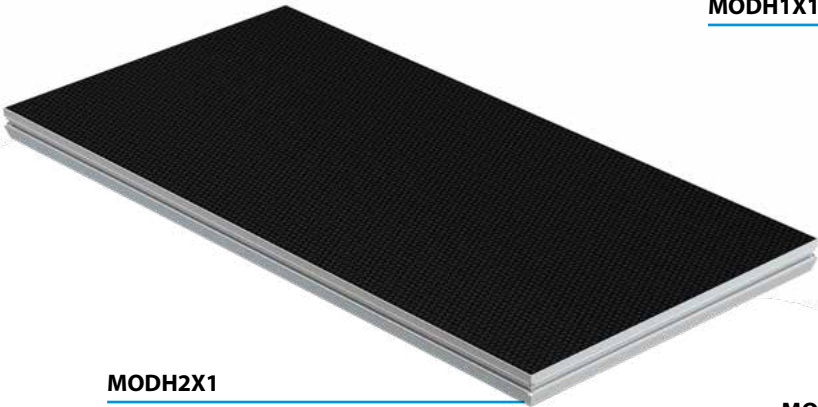

MODH2X1



MODH2X1

Stage platform structure made by extruded aluminum and weather resistant plywood with slip coating HEXA surface. Supplied without legs. Dimension: 2000 x 1000 x 90 mm (WxDxH).

MODW2X1

Stage platform structure with same features of MODH2X1 but with natural wood surface. Supplied without legs. Dimension: 2000 x 1000 x 90 mm (WxDxH).

MODP2X1

Stage platform structure with same features of MODH2X1 but with transparent plexiglass surface. Supplied without legs. Dimension: 2000 x 1000 x 90 mm (WxDxH).

MODH1X1

Stage platform structure made by extruded aluminum and weather resistant plywood with slip coating HEXA surface. Supplied without legs. Dimension: 1000 x 1000 x 90 mm (WxDxH).

MODW1X1


Stage platform structure with same features of MODH2X1 but with natural wood surface. Supplied without legs. Dimension: 1000 x 1000 x 90 mm (WxDxH).

MODP1X1

Stage platform structure with same features of MODH2X1 but with transparent plexiglass surface. Supplied without legs. Dimension: 1000 x 1000 x 90 mm (WxDxH).

TECH INFO	
MODH2X1	32 Kg (70,55 lbs)
MODW2X1	32 Kg (70,55 lbs)
MODP2X1	45 Kg (99,20 lbs)
MODH1X1	17,5 Kg (38,58 lbs)
MODW1X1	17,5 Kg (38,58 lbs)
MODP1X1	22 Kg (48,50 lbs)



• Loading Weight 750 Kg/m2 - according to DIN 15921

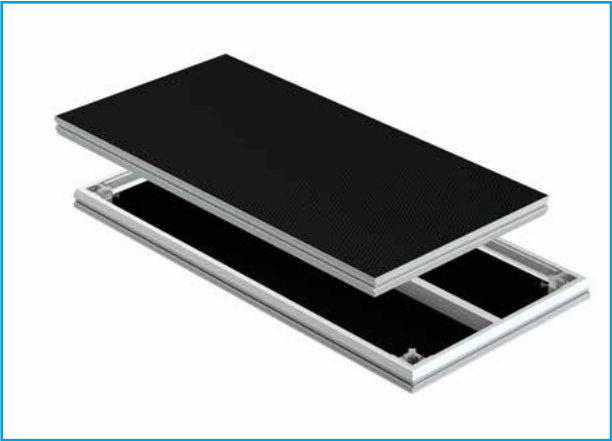

MODW2X1

# PLATFORMS

# MODULA SERIES

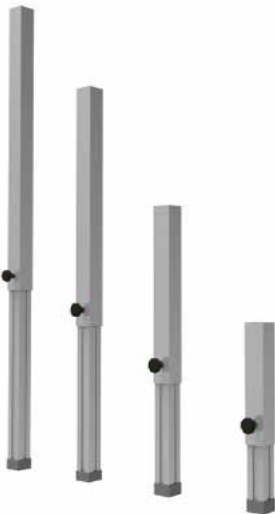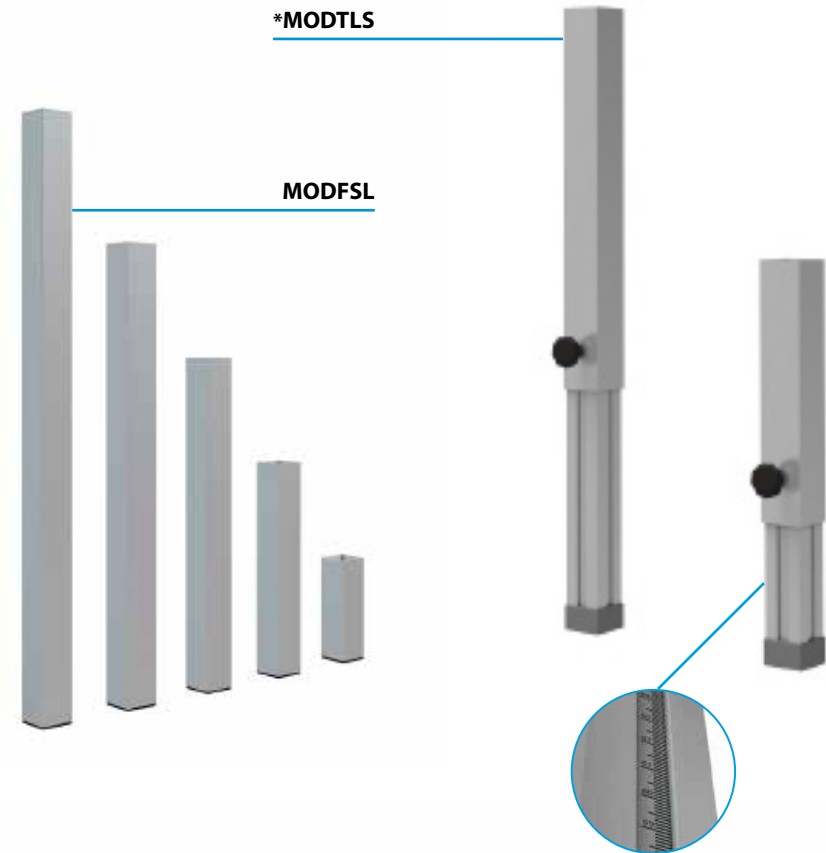

### MODTSL SERIES

Single telescopic leg, made of square extruded aluminum, available in two different heights. Refer to the technical table chart.

* CODE	HEIGHT
MODTSL40	40 – 60 cm
MODTSL60	60 – 100 cm

### MODFSL SERIES

Single fixed leg, made of square extruded aluminum, available in different heights. Refer to the technical table chart.

CODE	HEIGHT
MODFSL20	20 cm
MODFSL40	40 cm
MODFSL60	60 cm
MODFSL80	80 cm
MODFSL100	100 cm

# PLATFORMS MODULA SERIES



**MOD01DDC**




**MOD04LL2**



**MOD04LL4**



**MOD02LEV**

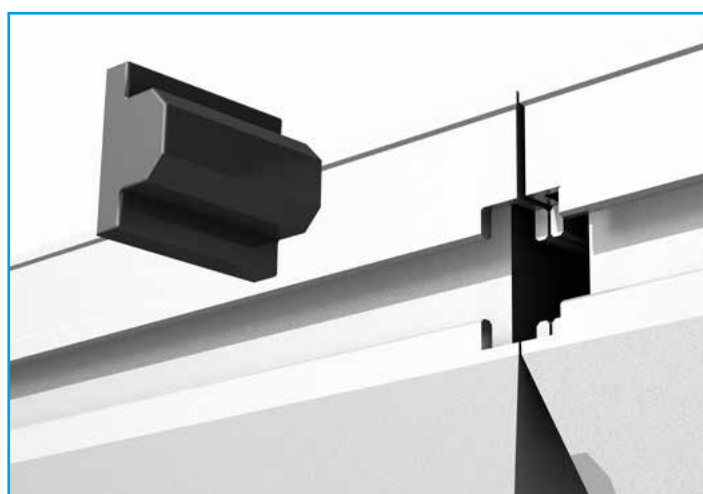

## **MOD01DDC**

Connection clamp to connect two adjacent platforms. It is recommended to use two clamps on the 2 meter side and one clamp for 1 meter side.

## **MOD04LL2**

Steel clamp to connect two adjacent legs.

## **MOD04LL4**

Steel clamp to connect four adjacent legs.

## **MOD02LEV**

Aluminum insert to keep two adjacent platforms at the same level.



PLATFORMS

# MODULA SERIES



MODULAR STAIR EXAMPLE



MODSTRHR



MODSTR20



MODSTR40



MODSTR60



MODSTR80

MODULAR STAIR EXAMPLE



MODSTR SERIES

Steel step for modular stair, available in different heights. The steps can be used individually or together for different needs. Supplied with universal connection system to the platform.

CODE	HEIGHT
MODSTR20	20 cm
MODSTR40	40 cm
MODSTR60	60 cm
MODSTR80	80 cm

MODSTRHR

Steel handrail for modular stair, to be used with two adjacent steps of different heights.


# PLATFORMS MODULA SERIES




**MODSTA60**



**MODSTA40**

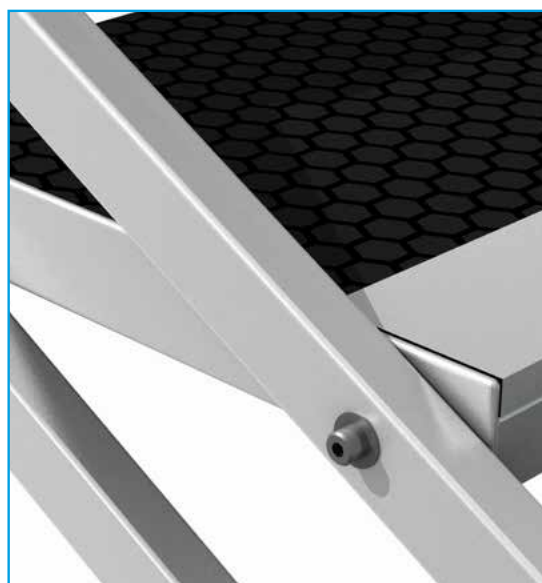

**ADJUSTABLE STAIR EXAMPLE**

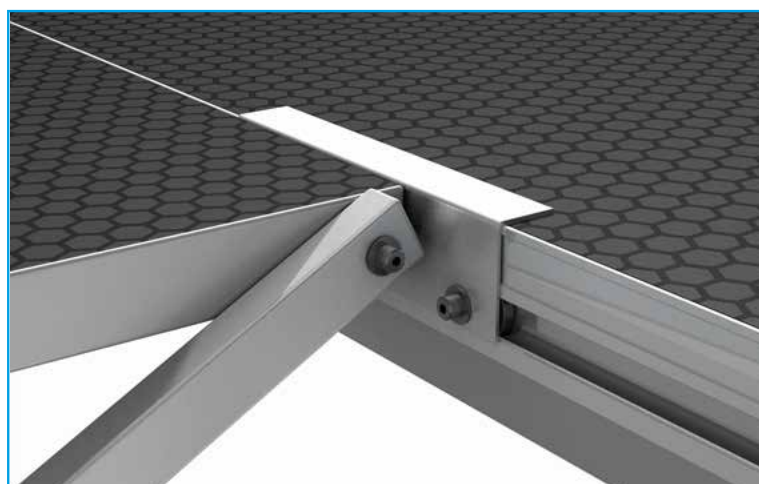

## **MODSTA40**

Two steps stair, with adjustable height from 40 to 60 cm. For this model does not use the handrail.

## **MODSTA60**

Four steps stair, with adjustable height from 60 to 100 cm.

## **MODSTAGR**


Right side adjustable stair handrail, to be used with MODSTA60 only.

## **MODSTAGRL**


Right side adjustable stair handrail, to be used with MODSTA60 only.

PLATFORMS

# MODULA SERIES

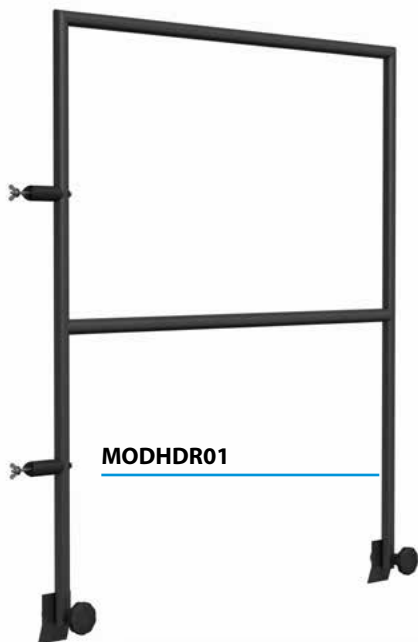

MODHDR01

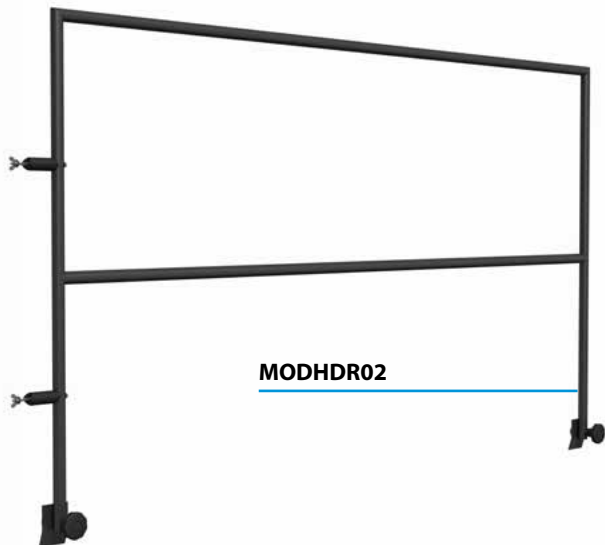

MODHDR02



MODHDC2



**MODHDR02**

Two meter length galvanized steel handrail, for standard use on stage with no public access.

**MODHDR01**

One meter length galvanized steel handrail, for standard use on stage with no public access.

**MODHDC1**

Angular handrail connection.

**MODHDC2**

Straight handrail connection.

# ACCESSORIES

# FLIGHTCASES

SG CASESAGOLED	Flightcase with wheels for 4 SAGOLED
SG CASECLUB	Flightcase with wheels for 4 CLUB SERIES SPOT BEAM
SG CASEPIXI5	Flightcase with wheels for 6 PIXI5/SW
SG CASEACLBAR	Flightcase with wheels for 4 ACL LED BAR
SG CASESAGOLEDM	Flightcase for 4 SAGOLED MINI
SG CASESCLWASH	Flightcase with wheels for 4 CLUB WASH
SG CASEHTZ	Flightcase with wheels for 6 HTZ LED
SG CASEHTZCOB	Flightcase with wheels for 6 HTZ LED COB
SG CASEBATI4DLH	Flightcase with wheels for 8 BATI 4DLH with battery charge system
SG CASEQUARTZ100	Flightcase with wheels for 4 QUARTZ100
SG CASEQUARTZ300	Flightcase with wheels for 2 QUARTZ300
SG CASEQUARTZ300X4	Flightcase with wheels for 4 QUARTZ300
SG CASEHALOFM	Flightcase for 4 HALOFWWM60
SG CASEHALOPR	Flightcase with wheels for 4 HALOPFWW 200
SG CASEQUIVER	Flightcase for QUIVER
SG CASEQUIVER1X	Flightcase for QUIVER + 1 QUIVERX
SG CASEQUIVER2X	Flightcase for QUIVER + 2 QUIVERX
SG CASESLIMBAR16DL	Flightcase with wheels for 4 SLIMBAR16DL
SG CASESLIMBAR8DL	Flightcase with wheels for 6 SLIMBAR8DL
SG CASEPIXI5WL	Flightcase with wheels for 8 PIXI5WL
SG CASEHALOFR	Flightcase with wheels for 4 HALOFWW 100/200
SG CASESTUDIOP	Flightcase with wheels for 4 STUDIO PANEL LED
SG CASESOLPAR60	Flightcase with wheels for 6 SOLPAR 60
SG CASESOLPAR150	Flightcase with wheels for 4 SOLPAR 150
SG CASEAQUAPAR	Flightcase with wheels for 6 AQUAPAR
SG CASEQUARIUX	Flightcase with wheels for 6 QUARIUX
SG CASESAGOLED300	Flightcase with wheels for 4 SAGOLED 300
SG CASEBLAZERC	Flightcase with wheels for 4 BLAZER 1500 C
SG CASEIPLED32C	Flightcase with wheels for 4 IPLED 32C DL
SG CASEIPLEDBARBAT	Flightcase with wheels for 4 IPLED BAR 8 BATTERY
SG CASEJNRPRO	Flightcase with wheels for 6 JUNIOR PROFILE
SG CASEHALOPM	Flightcase with wheels for 4 HALO PROFILE ZOOM 60
SG CASEBLOK2	Flightcase with wheels for 4 BLOK 2TW
SG CASECLBEAM7R	Flightcase with wheels for 2 CLUB BEAM 7R
SG CASESLIMPARBAT	Flightcase with wheels for 6 SLIMPAR 6 BATTERY
SG CASESLIMBARBAT	Flightcase with wheels for 5 SLIMBAR 8 BATTERY



# ACCESSORIES

CODE	DESCRIPTION	COMPATIBLE MODEL
SG SOLPARC60BN	Directional barndoor	SG SOLPARC60Z
SG SOLPARC150BN	Directional barndoor	SG SOLPARC150Z
SG LENS19C	Optics 19°	SG SAGOLEDW - SG SAGOLEDWW
SG LENS26C	Optics 26°	SG SAGOLEDW - SG SAGOLEDWW
SG LENS36C	Optics 36°	SG SAGOLEDW - SG SAGOLEDWW
SG LENS50C	Optics 50°	SG SAGOLEDW - SG SAGOLEDWW
SG IRIS	Iris Accessory	SG SAGOLEDW - SG SAGOLEDWW
SG LENS19M	Optics 19°	SG SAGOLEDWWM - SG SAGOLEDWCWM
SG LENS26M	Optics 26°	SG SAGOLEDWWM - SG SAGOLEDWCWM
SG LENS36M	Optics 36°	SG SAGOLEDWWM - SG SAGOLEDWCWM
SG LENS50M	Optics 50°	SG SAGOLEDWWM - SG SAGOLEDWCWM
SG IRISM	Iris Accessory	SG SAGOLEDWWM - SG SAGOLEDWCWM
SG LENS19	Optics 19°	SG SAGOLEDWW300 - SG SAGOLEDWCW300
SG LENS26	Optics 26°	SG SAGOLEDWW300 - SG SAGOLEDWCW300
SG LENS36	Optics 36°	SG SAGOLEDWW300 - SG SAGOLEDWCW300
SG LENS50	Optics 50°	SG SAGOLEDWW300 - SG SAGOLEDWCW300
SG IRIS	Iris Accessory	SG SAGOLEDWW300 - SG SAGOLEDWCW300
SG IRISM	Iris Accessory	SG HALOPWWM60 - SG HALOPCWM60
SG IRIS	Iris Accessory	SG HALOPWW2045 - SG HALOPWW1528
SG IRISJ	Iris Accessory	SG JNRPROWW - SG JNRPROCW - SG JNRPRORGW
SG LENS14J	Optics 14°	SG JNRPROWW - SG JNRPROCW - SG JNRPRORGW
SG LENS19J	Optics 19°	SG JNRPROWW - SG JNRPROCW - SG JNRPRORGW
SG LENS26J	Optics 26°	SG JNRPROWW - SG JNRPROCW - SG JNRPRORGW
SG LENS36J	Optics 36°	SG JNRPROWW - SG JNRPROCW - SG JNRPRORGW

# ALPHABETICAL INDEX

CODE	PAG
MOD01DDC	124
MOD02LEV	124
MOD04LL2	124
MOD04LL4	124
MODFSL100	123
MODFSL20	123
MODFSL40	123
MODFSL60	123
MODFSL80	123
MODH1X1	122
MODH2X1	122
MODHDR01	127
MODHDR02	127
MODHDRC1	127
MODHDRC2	127
MODP1X1	122
MODP2X1	122
MODSTA40	126
MODSTA60	126
MODSTahr	126
MODSTahrL	126
MODSTR20	125
MODSTR40	125
MODSTR60	125
MODSTR80	125
MODSTRHR	125
MODTSL40	123
MODTSL60	123
MODW1X1	122
MODW2X1	122
PLH10N	120
PLH10NBK	120
PLH232	120
PLH248	120
PLH270	120
PLH290	120
PLH290BK	120
PLH295	120
PLH295BK	120

CODE	PAG
PLH300	120
PLH340	120
PLH350BK	120
PLH420	120
PLLP1000T19	114
PLLP18W	115
PLLP200016	114
PLLP300M38	114
PLLP36W	115
PLLP500M40	114
PLLP575HTC	114
PLLP6428V	114
PLLP750HTC	114
PLLPDWE	114
PLLPHMI1200GS	115
PLLPHMI575CN	114
PLLPHMI575GS	115
PLLPHSD250	115
PLLPHSD250CN	114
PLLPHSR575	115
PLLPHSR575CN	114
PLLPMSR1200SA	115
PLLPP36V	114
PLLPP56V	114
PLLPP645V	114
PLLPP64A	114
PLLPP64B	114
PLLPP64C	114
PLLPXOP15N	115
SDC775LU015	117
SDC775LU025	117
SDC775LU05	117
SDC775LU10	117
SG ACLBAR10	8
SG ACLBAR5	9
SG ACLPARBAG	10
SG ACLPARBATBKC	10
SG ACLPARBATWHC	10
SG ACLPARCHR	10

CODE	PAG
SG AIRBOX	45
SG AIRBOXIP	45
SG AQUAPAR12	37
SG AQUAPAR18	38
SG AQUAPAR7	36
SG AQUAPARBN	38
SG AQUAPARBN	37
SG ARS1500FC	109
SG ARS900DJ	111
SG ARS900FC	110
SG BAGBATI4DLH	79
SG BATI4DLH	79
SG BATI4DLHKIT	79
SG BATI4TX	79
SG BLAZER1500S	33
SG BLOK2TW	34
SG BLOK2TWH	34
SG CABLECRS2	118
SG CABLECRS5	118
SG CABLECVR1S	119
SG CABLECVR1XS	119
SG CASEACLBAR	8-9-28
SG CASEAQUAPAR	36-37-38-128
SG CASEBATI4DLH	79-128
SG CASEBLAZERS	33-128
SG CASEBLOK2	34-128
SG CASECLBEAM7R	62-128
SG CASECLUB	59-60-128
SG CASEHALOFM	27-128
SG CASEHALOFR	25-26-128
SG CASEHALOPM	30-128
SG CASEHALOPR	28-29-128
SG CASEHTZ	75-128
SG CASEHTZCOB	76-77-128
SG CASEIPLED32C	13-128
SG CASEIPLEDBARBAT	19-128
SG CASEJNRPRO	24-128
SG CASEPIXI5	87-88-128

CODE	PAG
SG CASEPIXI5WL	89-128
SG CASEQUARIUX	12-128
SG CASEQUARTZ100	6-128
SG CASEQUARTZ300	5-128
SG CASEQUARTZ300X4	5-128
SG CASEQUIVER	47-128
SG CASEQUIVER1X	47-128
SG CASEQUIVER2X	47-128
SG CASESAGOLED	22-128
SG CASESAGOLED300	21-128
SG CASESAGOLEDM	23-128
sg caseScIwash	61-128
SG CASESLIMBAR16DL	81-83-128
SG CASESLIMBAR8DL	82-128
SG CASESLIMBARBAT	85-128
SG CASESLIMPARBAT	73-128
SG CASESOLPAR150	41-128
SG CASESOLPAR60	40-128
SG CASESTUDIOP	31-32-128
SG CLBEAM100	60
SG CLBEAM7R	62
SG CLBEAM7RKIT	62
SG CLSPOT100	59
SG CLWASH	61
sg CLWASHKIT	61
SG CVMBATI4DLH	79
SG CVRBATI4DLH	79
SG CVWBATI4DLH	79
SG DMX3CLU02	116
SG DMX3CLU03	116
SG DMX3CLU05	116
SG DMX3CLU10	116
SG DMX3PLU01	116
SG DMX3PLU02	116
SG DMX3PLU03	116
SG DMX3PLU05	116
SG DMX3PLU10	116
SG DMX3PLU15	116
SG DMX3PLU20	116

CODE	PAG
SG DMX5CLU02	116
SG DMX5CLU03	116
SG DMX5CLU05	116
SG DMX5CLU10	116
SG DMX5PLU01	116
SG DMX5PLU02	116
SG DMX5PLU03	116
SG DMX5PLU05	116
SG DMX5PLU10	116
SG DMX5PLU15	116
SG DMX5PLU20	116
SG FASTER1224	98
SG FASTER192N	96
SG FASTER2448	99
SG FASTER384	97
SG FASTER4	100
SG FASTER6	101
SG FASTERsp8	102
SG FLBATCHBOX	43-44
SG FLBATQ1	44
SG FLBATQ3	43
SG H1500	50
SG H300	104
SG HALOFCW	25
SG HALOFCWM	26
SG HALOFCWM60	27
SG HALOFFWW	25
SG HALOFFWM	26
SG HALOFFWM60	27
SG HALOPCW1528	28
SG HALOPCW2045	29
SG HALOPCWM60	30
SG HALOPWW1528	28
SG HALOPWW2045	29
SG HALOPWWM60	30
SG HS200	106
SG HS900	51
SG HTZLEDC	75
SG HTZLEDCOBC	77

CODE	PAG
SG HTZLEDCO8W	76
SG HYH900	105
SG HZRFLD5	113
SG IPCDLU05	117
SG IPCDLU10	117
SG IPCDLU3	117
SG IPCPDLU10	117
SG IPCPDLU3	117
SG IPCPDLU5	117
SG IPCPLU10	117
SG IPCPLU3	117
SG IPCPLU5	117
SG IPLED24C	14
SG IPLED32CBN	13
SG IPLED32CDLWD	13
SG IPLED9C	15
SG IPLEDBAR12C	16
SG IPLEDBAR24C	17
SG IPLEDBAR8BAT	19
SG IPLEDMCBAR54C	18
SG IRIS	129
SG IRISJ	129
SG IRISM	129
SG JNRPROCW	24
SG JNRPRORGBW	24
SG JNRPROWW	24
SG LEDKITHP3BAT	91
SG LEDKITHP3C	92
SG LEDKITHP7	94
SG LEDKITHP7BAT	93
SG LENS14J	129
SG LENS19	129
SG LENS19C	129
SG LENS19J	129
SG LENS19M	129
SG LENS26	129
SG LENS26C	129
SG LENS26J	129
SG LENS26M	129

# ALPHABETICAL INDEX

CODE	PAG	CODE	PAG	CODE	PAG
SG LENS36	129	SG QUARIUXRGBWZ	12	SG SLIMPAR7DL	64
SG LENS36C	129	SG QUARIUXRGBZ	12	SG SLIMPARCOB100	72
SG LENS36J	129	SG QUARIUXVW	12	SG SLIMPARCOB30	70
SG LENS36M	129	SG QUARIUXWW	12	SG SLIMPARCOB60	71
SG LENS50	129	SG QUARTZ100	6	SG SLIMPARFLC	69
SG LENS50C	129	SG QUARTZ300	5	SG SMKFLD5D	113
SG LENS50M	129	SG QUARTZ300KIT	5	SG SMKFLD5L	113
SG LTUHP190W	115	SG QUIVER	47	SG SMKFLD5M	113
SG LTUHP200W	115	SG QUIVERWI	47	SG SMKFLD5QD	113
SG LTVIP280W	115	SG QUIVERWI2	47	SG SMTBEAM	56
SG MIMETIKM	107	SG QUIVERX	48	SG SMTDOT	55
SG MIMETIKXL	108	SG SAGOLEDWCW300	21	SG SMTSPOTPLUS	58
SG PIX15	87	SG SAGOLEDWCM	23	SG SMTWHPLUS	57
SG PIX15W	88	SG SAGOLEDW	22	SG SOLPARC150BN	129
SG PIX15WL	89	SG SAGOLEDWW	22	SG SOLPARC150BN	41
SG PL300LK	115	SG SAGOLEDWW300	21	SG SOLPARC150Z	41
SG PL700LK	115	SG SAGOLEDWWM	23	SG SOLPARC60BN	129
SG PL700LK28	115	SG SLIMBAR12P	81	SG SOLPARC60BN	40
SG PLHRI100	115	SG SLIMBAR16DL	83	SG SOLPARC60Z	40
SG PLHRI132	115	SG SLIMBAR240	84	SG STUDIOPCW	32
SG PLHRI230	115	SG SLIMBAR8BAT	85	SG STUDIOPRGB	31
SG PLHRI280	115	SG SLIMBAR8DL	82	SG STUDIOPWW	32
SG QUARIUXCW	12	SG SLIMPAR12	66	SM300LU10	117
SG QUARIUXRGB	12	SG SLIMPAR12DL	65	SM300LU15	117
SG QUARIUXRGBL	12	SG SLIMPAR18	67	SM300LU5	117
SG QUARIUXRGBLZ	12	SG SLIMPAR18C	68		
SG QUARIUXRGBW	12	SG SLIMPAR6BAT	73		

• Prices, design and specifications subject to change without any notice

• The photostatic and photographic reproduction of this catalogue, in whole or in part, is strictly prohibited without the prior written consent of Proel S.p.a.





**SAGITTER**

is a brand of

PROEL SPA  
(Worldwide Headquarters)  
Via alla Ruenia, 37/43  
64027 Sant'Omero (TE) - ITALY  
Tel. +39 0861 81241  
Fax +39 0861 887862  
P.I. 00778590679  
N.Reg.AEE IT 08020000002762

**sagitter.com**

